



Compact circuit-breaker NZM up to 1600 A Compact switch-disconnectors N, PN up to 1600 A

Safe energy control, switching and control in industrial settings, buildings and machinery construction: innovative protection concept coupled with diagnostic and communication functions make it possible.

The NZM circuit-breaker assortment offers an interface for the SmartWire-Darwin communication system. → Page 17/140

ATEX 



Model series NZM1 – NZM4

Only four compact switches cover all applications +++ 3- and 4-pole +++ Flexible mounting through modular functions groups +++ Complete nominal current up to 50 °C ambient temperature +++ Suitable for use worldwide → Page 17/4

Door coupling rotary handles

Very wide range of variants for each application +++ All applications have identical drilling template +++ Automatic centering +++ Shaft support for years of operational safety +++ Sidewall installation for space-saving main switch installation Page 17/118

Standard auxiliary contacts, trip-indicator auxiliary contacts from the Eaton command device program.

Favorably priced identical parts from the Titan program reduce variety of types and stockkeeping +++ Installation from front to same position +++ Easy clip-in reduces assembling costs → Page 17/106

Remote operators

Unified functions concept for all variants +++ Small closing delays from 60 – 100 ms +++ Can be locked and sealed to provide safety → Page 17/134

Diagnostics software NZM-XPC-SOFT

Diagnostics in fault scenario +++ Error-free commissioning +++ Load analysis in operation → Page 138



Eaton After Sales Service

Testing switching devices in compliance with regulations applicable to this technology → S22/2

Compact circuit-breakers and switch-disconnectors up to 1600 A

Contents

1



1.1 System overview	
Circuit-breakers, switch-disconnectors 3/4 pole	4
1.2 System overviewTechnical overview	
Circuit-breakers, switch-disconnectors 3/4 pole	6
1.3 System overviewOrdering	
Circuit-breakers, thermomagnetic releases pole	83
Circuit-breakers, magnetic short-circuit releases, 3 pole	18
Circuit-breakers, electronic releases, 3 pole	22
Circuit-breakers, thermomagnetic releases, 4 pole	28
Circuit-breakers, electronic releases, 4 pole	36
Switch-disconnectors, 3 pole	42
Switch-disconnectors, 4 pole	44
Circuit-breakers for 1000 V AC, 3 pole	46
Switch-disconnectors for 1000 V DC, 2 pole	49
Switch-disconnectors in ATEX type	50
1.4 System overviewTechnical overview	
Circuit-breakers, switch-disconnectors for North America, 3/4 pole	52
1.5 System overviewOrdering	
Circuit-breakers UL/CSA, IEC, thermomagnetic releases, 3 pole	54
Circuit-breakers UL/CSA, IEC, magnetic short-circuit releases, 3 pole	72
Circuit-breakers UL/CSA, IEC, electronic releases, 3 pole	64
Circuit-breakers UL/CSA, IEC, thermomagnetic releases, 4 pole	78
Molded case switches for North America	80
1.6 System overviewOrdering	
Terminals	82
Plug-in units, withdrawable units	105
Auxiliary contacts	106
Undervoltage releases	108
Shunt releases	114
Door coupling rotary handles	118
Door coupling rotary handles for North America	120
Rotary handles with door interlock	123
Main switch assembly kit	124
Accessories	127
Mechanical interlock	130
Paralleling mechanism	131
Multifunction component adapter	122
Remote drive	134
Earth-fault release	135
Earth-fault release, residual-current relay	137
Diagnostics, energy metering, communication	138
SmartWire-DT communication module	140
Insulated enclosures	142



1.7 Engineering	
Selectivity: incoming circuit-breaker, outgoing circuit-breaker	144
Cable protection, back-up protection	148
Direction of blow-out, minimum clearances, tube cable lugs	149
Auxiliary contacts, trip-indicating auxiliary contacts	150
Mechanical interlock for (door-coupling) rotary handles	151
Mechanical interlock for remote operator, residual-current relay	152
Remote operator, main switch assembly kit, terminals	153
Tripping characteristic	154
Let-through characteristics	158
Residual-current release of the frequency response	164
1.8 Technical data	
Circuit-breakers, switch-disconnectors	165
Circuit breakers	166
Circuit-breakers, switch-disconnectors for 1000 V	168
Switch-disconnectors	169
Moulded case switches	170
Current limiting values, weights	171
Temperature dependency, thermomagnetic release	172
Temperature dependency, electronic release	173
Active power loss	174
Terminal capacities	176
Switch-disconnectors for 1000 V, bridge kits: temperature dependency	178
Auxiliary contacts, equipping time differences	179
Undervoltage release, shunt release, capacitor unit	180
Remote operator, residual-current relay	181
Residual-current releases	182
Data management interface (DMI module)	183
Fieldbus connection	184
SmartWire-DT communication module	186
Measuring and communication module	188
1.9 Dimensions	
Construction size 1: basic devices	189
Construction size 1: accessories	190
Construction size 2: basic devices	198
Construction size 2: accessories	199
Construction size 3: basic devices	210
Construction size 3: accessories	211
Construction size 4: basic devices	220
Construction size 4: accessories	221
Measuring and communication module	233
SmartWire-DT communication module	233


1.1

Circuit-breakers, switch-disconnectors


Auxiliary contacts, trip-indicating auxiliary contacts

System overview

1 NZM

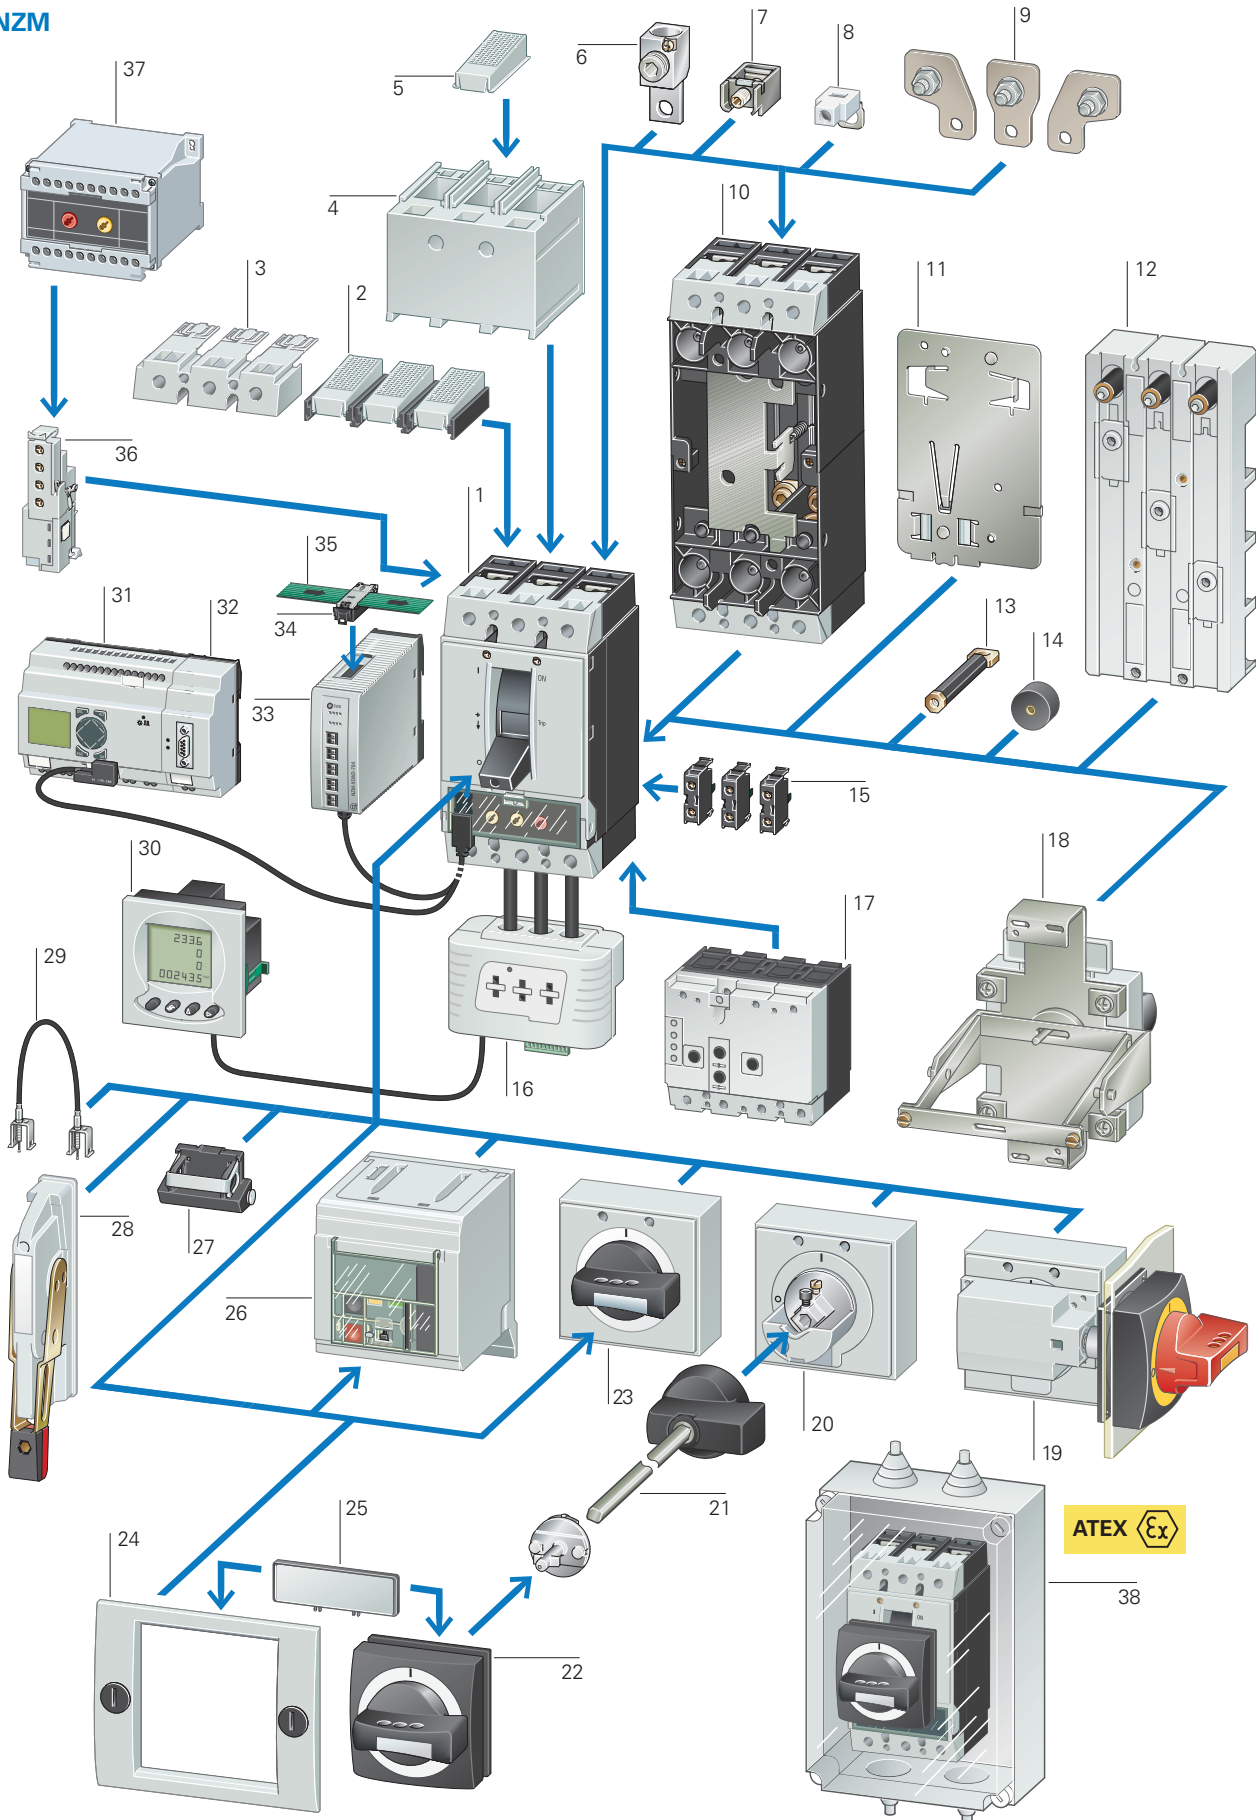

Basic devices

1		Voltage releases	15	Measuring and communication module	16	Terminal covers	4
	Rated uninterrupted current up to 1600A		Undervoltage releases		For reading current, voltage, power and energy		Protection against direct contact where cable lugs, bars or tunnel terminals are used
	Switching capacity 25, 36, 50, 150 kA at 415 V		Shunt releases		MODBUS interface on board		NZM1 → Page 84
	Adjustable releases for overload and short-circuit		→ Page 108		→ Page 141		NZM2 → Page 88
	Adjustable time selectivity	Insulated enclosures	38	Display	30zz		NZM3 → Page 98
	Protection of systems, cables, motors, generators		Safety switches (maintenance and manual override switches) approved for use in potentially explosive areas in Zone 22.		Connectable to modules NZM...XMC-MB		NZM4 → Page 104
	3 and 4 pole; IEC/EN 60947		Degree of protection IP66		With templates for viewing XMC readings		
	→ Page 8		ATEX 		Indication of min. and max. values		
			→ Page 142		→ Page 141		
Switch-disconnectors	1	Delay unit for undervoltage releases	37	Data management interface (DMI module)	31	Terminal covers, knockout	3
	Rated uninterrupted current up to 1600 A		→ Page 114		Access to diagnostics and operational data		NZM1 → Page 84
	Can be tripped remotely with undervoltage or shunt release				Acquisition of current values		NZM2 → Page 88
	3 and 4 pole; IEC/EN 60947				Motor starter function		NZM3 → Page 98
	→ Page 42				Parameterization and control of circuit-breakers with electronic releases		NZM4 → Page 104
		Rear-mounted drives	18		→ Page 139		
Circuit-breakers for North America	1		→ Page 127	PROFIBUS-DP interface	32	Clips	11
	Rated uninterrupted current up to 1200 A	Door coupling rotary handles	20		→ Page 139		NZM1-XC35 for 35-mm-top-hat rail
	Switching capacity 25, 35, 100 kA at 480 V		22				NZM2-XC75 for 75-mm-top-hat rail
	Adjustable release for overload and short-circuit		• Lockable				→ Page 129
	Adjustable time selectivity		• With door interlock				
	Protection of systems, cables, motors, generators		→ Page 118	Main switch rotary handles for side wall installation	19	Busbar adapters	12
	3 and 4 pole, UL 489/CSA 22.2 no. 5.1, IEC/EN 60947				→ Page 125		→ Page 132
	→ Page 54	Extension shaft	21			Rear connection terminals	13
			Can be cut to required length	Connection width extensions	9		NZM1 → Page 82
			→ Page 118		NZM3 → Page 92	Plug-in units and withdrawable units	10
Molded case switches for North America	1	Rotary handles	23		NZM4 → Page 103		→ Page 105
	Rated uninterrupted current up to 1200 A		Lockable	Control cable terminals	8	Insulating surround	24
	Can be tripped remotely with undervoltage or shunt release		→ Page 122		For two terminal locations at top or bottom		For toggle levers, rotary mechanisms and remote operators
	3 pole, UL489/CSA 22.2 no. 5.1	Remote operators	26		NZM1 → Page 84		→ Page 129
	→ Page 80		For remote switching of circuit-breakers and switch-disconnectors		NZM2 → Page 88	External warning plate/designation labels	25
			→ Page 134		NZM3 → Page 84		→ Page 54
					NZM4 → Page 104	Spacers	14
Add-on functions		Residual-current protection device	17	Tunnel terminals for AI and copper cables	6		→ Page 129
			→ Page 135		Standard with control circuit terminal	IP2X protection against contact with finger	2
Standard auxiliary contacts (HIV)	15	Toggle lever locking device	27		NZM1 → Page 82		For box terminals
	Switches with the main contacts.		→ Page 129		NZM2 → Page 86		NZM1 → Page 84
	Performs signalling and interlock functions	Side operator handle	28		NZM3 → Page 194		NZM2 → Page 88
	→ Page 106		→ Page 128		NZM4 → Page 102		NZM3 → Page 98
Trip-indicating auxiliary contacts (HIA)	15	Mechanical interlocks	29	Box terminals	7	IP2X protection against contact with finger	5
	General trip indication '+', when tripped by voltage release, overload release or short-circuit release		→ Page 130		Standard equipment on construction size 1		For covers
	→ Page 106	Communication module NZM for SmartWire-Darwin	33		Flush mounting within the switch housing		NZM1 → Page 84
Early-make auxiliary contacts	36		For reading status data, current values, switch model and set values		NZM1 → Page 82		NZM2 → Page 88
	For interlock and load-shedding circuits		→ Page 140		NZM2 → Page 86		NZM3 → Page 98
	→ Page 106				NZM3 → Page 92		

1.2

Circuit-breakers, switch-disconnectors

Auxiliary contacts, trip-indicating auxiliary contacts

1

NZM1, NZM2, NZM3, NZM4

Circuit-breakers

With main switch characteristics to IEC/EN 60204 and Isolator characteristics to IEC/EN 60947, VDE 0660



Rated uninterrupted current I_u =
Rated current I_n
Adjustable overload releases I_r
Adjustable short-circuit releases I_i
Delayed short-circuit releases I_{sd}

Thermomagnetic releases System cable protection



Motor protection

	I_u A	I_u A	I_o A	I_r A	I_i A	I_u A	I_u A	I_r A	I_i A
Ambient temperature at 100% I_u min./max. -25/+50 °C	20	20	20	0.8 - 1x I_n	350	20	20	0.8 - 1x I_n	350
	25	25	25	0.8 - 1x I_n	350	25	25	0.8 - 1x I_n	350
	32	32	32	0.8 - 1x I_n	350	32	32	0.8 - 1x I_n	10 - 14x I_n
	40	40	40	0.8 - 1x I_n	8 - 10x I_n	40	40	0.8 - 1x I_n	8 - 14x I_n
	50	50	50	0.8 - 1x I_n	6 - 10x I_n	50	50	0.8 - 1x I_n	8 - 14x I_n
	63	63	63	0.8 - 1x I_n	6 - 10x I_n	63	63	0.8 - 1x I_n	8 - 14x I_n
	80	80	80	0.8 - 1x I_n	6 - 10x I_n	80	80	0.8 - 1x I_n	8 - 14x I_n
	100	100	100	0.8 - 1x I_n	6 - 10x I_n	100	100	0.8 - 1x I_n	NZM1: 8 - 12.5x I_n
	100	100	100	0.8 - 1x I_n	6 - 10x I_n			0.8 - 1x I_n	NZM2: 8 - 14x I_n
	100	100	100	0.8 - 1x I_n	6 - 10x I_n			0.8 - 1x I_n	8 - 14x I_n
	125	125	125	0.8 - 1x I_n	6 - 10x I_n			0.8 - 1x I_n	8 - 14x I_n
	160	160	160	0.8 - 1x I_n	6 - 10x I_n		125	0.8 - 1x I_n	8 - 14x I_n
	200	200	200	0.8 - 1x I_n	NZM1:8x I_n		160	0.8 - 1x I_n	8 - 14x I_n
	250	250	250	0.8 - 1x I_n	6 - 10x I_n		200	0.8 - 1x I_n	8 - 14x I_n
	320	320	320	0.8 - 1x I_n	6 - 10x I_n			0.8 - 1x I_n	8 - 14x I_n
	400	400	400	0.8 - 1x I_n	6 - 10x I_n			0.8 - 1x I_n	8 - 14x I_n
	500	500	500	0.8 - 1x I_n	6 - 10x I_n			0.8 - 1x I_n	8 - 14x I_n
Basic switching capacity	NZMB1-A...	NZMB2-A...				NZMB2-M...	NZMB2-M...		
400/415V kA/p.f	25 0.25	25 0.25				25 0.25	25 0.25		
440V kA/p.f	25 0.25	25 0.25				25 0.25	25 0.25		
Comfort switching capacity	NZMC1-A...	NZMC2-A...	NZMC3-A...						
400/415V kA/p.f	36 0.25	36 0.25	36 0.25						
440V kA/p.f	30 0.25	30 0.25	30 0.25						
525V kA/p.f	12 0.5	12 0.5	12 0.5						
690V kA/p.f	8 0.5	8 0.5	8 0.5						
Normal switching capacity	NZMN1-A...	NZMN2-A...	NZMN3-A...			NZMB2-M...	NZMB2-M...		
400/415V kA/p.f	50 0.25	50 0.25	50 0.25			50 0.25	50 0.25		
440V kA/p.f	35 0.25	35 0.25	35 0.25			35 0.25	35 0.25		
525V kA/p.f	20 0.30	20 0.25	20 0.25			20 0.30	20 0.25		
690V kA/p.f	10 0.50	10 0.30	10 0.30			10 0.50	10 0.30		
High switching capacity	NZMH1-A...	NZMH2-A...	NZMH3-A...				NZMH2-M...		
400/415V kA/p.f	100 0.20	150 0.20	150 0.20				150 0.20		
440V kA/p.f	35 0.25	130 0.20	130 0.20				130 0.20		
525V kA/p.f	20 0.30	50 0.25	65 0.20				50 0.25		
690V kA/p.f	10 0.50	20 0.30	35 0.25				20 0.30		



Notes The stated switching capacity values are rated ultimate short-circuit breaking capacities (I_{cu})

Switch-disconnectors

With main switch characteristics to IEC/EN 60204 and VDE 0113
Isolating characteristics to IEC/EN 60947, VDE 0660
without overload and short-circuit release



Rated uninterrupted current I_u = Rated current I_n	63 - 160		160 - 250		400 - 630		630 - 1600	
Type N can be triggered with U/A shunt release	PN1-...	PN1-...	PN1-...	PN1-...	PN1-...	PN1-...	PN1-...	PN1-...
Rated short-circuit making capacity I_{cm}	kA	2.8	2.8	2.8	2.8	2.8	2.8	2.8
Rated short-time withstand current I_{cw} (1s-1s-current _{ms})	kA	2	2	2	2	2	2	2



Electronic releases

Systems, cable, selectivity and generator protection

Motor protection

I_u A	I_u A	I_o A	I_r A	I_i A	I_u A	I_u A	I_r A	I_i A
100	250		$0.5 - 1 \times I_n$	$2 - 10 \times I_r$	$2 - 12 \times I_n$	90	$0.5 - 1 \times I_n$	$2 - 14 \times I_r$
160	400					140		
250	630	630				220		
		800				350		
		1000				450		
		1250		$2 - 6 \times I_r$	$2 - 8 \times I_r$	550		
		1600				875		
						1400		

NZMN2-...E...			NZMN3-...E...			NZMN4-...E...			NZMN2-ME...			NZMN3-ME...			NZMN4-ME...		
50	0.25		50	0.25		50	0.25		50	0.25		50	0.25		50	0.25	
35	0.25		35	0.25		35	0.25		35	0.25		35	0.25		35	0.25	
25	0.25		25	0.25		25	0.25		25	0.25		25	0.25		25	0.25	
20	0.30		20	0.30		20	0.30		20	0.30		20	0.30		20	0.30	
NZMH2-...E...			NZMH3-...E...			NZMH4-...E...			NZMH2-ME...			NZMH3-ME...			NZMH4-ME...		
150	0.20		150	0.20		85 ¹⁾	0.20		150	0.20		150	0.20		85 ¹⁾	0.20	
130	0.20		130	0.20		85	0.20		130	0.20		130	0.20		85	0.20	
50	0.25		65	0.20		65	0.20		50	0.25		65	0.20		65	0.20	
20	0.30		35	0.30		50	0.25		20	0.30		35	0.30		50	0.25	

A selection of approved circuit-breakers and switch-disconnectors for world-wide use → Page 17/54

1) For higher switching capacity please inquire

1.3

Circuit-breakers, switch-disconnectors

Auxiliary contacts, trip-indicating auxiliary contacts

Ordering

1

NZM...A

Switching capacity
400/415 V 50/60 Hz

Rated current =
Rated uninterrupted
current

Setting range
Overload releases

Short-circuit releases
Non-delayed

Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price
list

I_{cu}
kA

$I_n=I_u$
A

I_r
A

$I=I_n \times \dots$



System and cable protection

Basic switching capacity



Basic switching capacity	Rated current I_n (A)	Setting range I_r (A)	Short-circuit releases	Fixed mounting	Price
25	20	15-20	350A fixed	Screw terminals as accessories	
	5	20-25	350A fixed		
	32	25-32	350A fixed		
	40	32-40	8-10		
	50	40-50	6-10		
	63	50-63	6-10		
	80	63-80	6-10		
	100	80-1000	6-10		
	125	100-125	6-10		
160	125-160	1280 A fixed			

Basic switching capacity



25	160	125-160	6-10	NZMB2-A160 259088	S
	200	160-200	6-10	NZMB2-A200 259089	S
	250	200-250	6-10	NZMB2-A250 259090	S
	300	240-300	6-10	NZMB2-A300 107518	S

Comfort switching capacity



36	20	15-20	350A fixed	Screw terminals as accessories	
	5	20-25	350A fixed		
	32	25-32	350A fixed		
	40	32-40	8-10		
	50	40-50	6-10		
	63	50-63	6-10		
	80	63-80	6-10		
	100	80-1000	6-10		
	125	100-125	6-10		
160	125-160	1280 A fixed			

Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price list

Plug-in units

Part no.
Article no.

Price
See price list

Std. pack

Notes

Order base separately

Fixed mounting		Plug-in units			
Part no.	Price	Part no.	Price	Std. pack	Notes
Article no.	See price list	Article no.	See price list		
NZMB1-A20 280987	B	NZMB1-A20-SVE 112733		1 off	B = box terminals S = screw terminals For further terminal types see accessories IEC/EN 60947-2
NZMB1-A25 280988	B	NZMB1-A25-SVE 112734			
NZMB1-A32 280989	B	NZMB1-A32-SVE 112735			
NZMB1-A40 259075	B	NZMB1-A40-SVE 112703			
NZMB1-A50 259076	B	NZMB1-A50-SVE 112704			
NZMB1-A63 259077	B	NZMB1-A63-SVE 112705			
NZMB1-A80 259078	B	NZMB1-A80-SVE 112706			
NZMB1-A100 259079	B	NZMB1-A100-SVE 112707			
NZMB1-A125 259080	B	NZMB1-A125-SVE 112708			
NZMB1-A160 281230	B				
NZMB2-A160-BT 110215	B	NZMB2-A160-SVE 113193			
NZMB2-A200-BT 110216	B	NZMB2-A200-SVE 113194			
NZMB2-A250-BT 110217	B	NZMB2-A250-SVE 113195			
NZMB2-A300-BT 110214	B				
NZMC1-A20 283293	B	NZMC1-A20-SVE 112753		1 off	IEC/EN 60947-2
NZMC1-A25 283294	B	NZMC1-A25-SVE 112754			
NZMC1-A32 283295	B	NZMC1-A32-SVE 112755			
NZMC1-A40 271392	B	NZMC1-A40-SVE 112737			
NZMC1-A50 271393	B	NZMC1-A50-SVE 112738			
NZMC1-A63 271394	B	NZMC1-A63-SVE 112739			
NZMC1-A80 271395	B	NZMC1-A80-SVE 112740			
NZMC1-A100 271396	B	NZMC1-A100-SVE 112741			
NZMC1-A125 271397	B	NZMC1-A125-SVE 112742			
NZMC1-A160 283296	B				

1.3 Circuit-breakers, switch-disconnectors

Auxiliary contacts, trip-indicating auxiliary contacts

NZM...A

Switching capacity
400/415 V 50/60 Hz

Rated current =
Rated uninterrupted
current

Setting range

Overload releases

Short-circuit releases

Non-delayed

Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price
list

I_{cu}
kA

$I_n=I_u$
A

I
A

$I=I_n \times \dots$



System and cable protection

Comfort switching capacity




36	160	125-160	6-10	NZMC2-A160 271421	S
	200	160-200	6-10	NZMC2-A200 271422	S
	250	200-250	6-10	NZMC2-A250 271423	S
	300	240-300	6-10	NZMC2-A300 107519	S
36	320	250-320	6-10	NZMC3-A320 109665	S
	400	320-400	6-10	NZMC3-A400 109666	S
	500	400-500	6-10	NZMC3-A500 109667	S


Normal switching capacity



50	20	20-25	350 A fixe	Screw terminals as accessories	
	25	20-25	350 A fixe		
	32	25-32	350 A fixe		
	40	32-40	8-10		
	50	40-50	6-10		
	63	50-63	6-10		
	80	63-80	6-10		
	100	80-100	6-10		
	125	100-125	6-10		
50	160	125-160	1280 A fixe		



50	160	125-160	6-10	NZMN2-A160 259092	S
	200	160-200	6-10	NZMN2-A200 259093	S
	250	200-250	6-10	NZMN2-A250 259094	S
	300	240-300	6-10	NZMN2-A300 107580	S
50	320	250-320	6-10	NZMN3-A320 109669	S
	400	320-400	6-10	NZMN3-A400 109670	S
	500	400-500	6-10	NZMN3-A500 109671	S



Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price list

Plug-in units






Part no.
Article no.

Price
See price list

Std. pack

Notes

Order base separately

						B = box terminals S = screw terminals For further terminal types see accessories	
NZMC2-A160-BT 110219	B		NZMC2-A160-SVE 113220	1 off	IEC/EN 60947-2		
NZMC2-A200-BT 110280	B		NZMC2-A200-SVE 113221				
NZMC2-A250-BT 110281	B		NZMC2-A250-SVE 113222				
NZMC2-A300-BT 110218	B		—				
NZMC3-A320-BT 110299	B		NZMC3-A320-AVE 113509				
NZMC3-A400-BT 110300	B		NZMC3-A320-AVE 113510				
NZMC3-A500-BT 110301	B		NZMC3-A500-AVE 113511				
NZMN1-A20 281231	B		NZMN1-A20-SVE 112776	1 off	IEC/EN 60947-2		
NZMN1-A25 281232	B		NZMN1-A25-SVE 112777				
NZMN1-A32 281233	B		NZMN1-A32-SVE 112778				
NZMN1-A40 259081	B		NZMN1-A40-SVE 112757				
NZMN1-A50 259082	B		NZMN1-A50-SVE 112758				
NZMN1-A63 259083	B		NZMN1-A63-SVE 112759				
NZMN1-A80 259084	B		NZMN1-A80-SVE 112760				
NZMN1-A100 259085	B		NZMN1-A100-SVE 112761				
NZMN1-A125 259086	B		NZMN1-A125-SVE 112762				
NZMN1-A160 281234	B		—				
NZMN2-A160-BT 110283	B		NZMN2-A160-SVE 113244				
NZMN2-A200-BT 110284	B		NZMN2-A200-SVE 113245				
NZMN2-A250-BT 110285	B		NZMN2-A250-SVE 113246				
NZMN2-A300-BT 110282	B		—				
NZMN3-A320-BT 110302	B		NZMN2-A320-AVE 110858				
NZMN3-A400-BT 110303	B		NZMN3-A400-AVE 110859				
NZMN3-A500-BT 110304	B		NZMN3-A500-AVE 110860				

1.3 Circuit-breakers, switch-disconnectors

Auxiliary contacts, trip-indicating auxiliary contacts

NZM...A

Switching capacity
400/415 V 50/60 Hz

Rated current =
Rated uninterrupted
current

Setting range

Overload releases

Short-circuit releases

Non-delayed

Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price
list

I_{cu}
kA

$I_n=I_u$
A

I_r
A

$I_r=I_n \times \dots$



System and cable protection


High switching capacity



100	20	15-20	350 A fix de	Screw terminals as accessories	
	25	20-25	350 A fix de		
	32	25-32	350 A fix de		
	40	32-40	8-10		
	50	40-50	6-10		
	63	50-63	6-10		
	80	63-80	6-10		
	100	80-100	6-10		
	125	100-125	6-10		
	160	125-160	1280 A fix de		



150	20	15-20	350 A fix de	NZMH2-A20 281281	S
	25	20-25	6-10	NZMH2-A25 281282	S
	32	25-32	350 A fixde	NZMH2-A32 281283	S
	40	32-40	8-10	NZMH2-A40 259095	S
	50	40-50	6-10	NZMH2-A50 259096	S
	63	50-63	6-10	NZMH2-A63 259097	S
	80	63-80	6-10	NZMH2-A80 259098	S
	100	80-100	6-10	NZMH2-A100 259099	S
	125	100-125	6-10	NZMH2-A125 259100	S
	160	125-160	6-10	NZMH2-A160 259101	S
	200	160-200	6-10	NZMH2-A200 259102	S
	250	200-250	6-10	NZMH2-A250 259103	S
	300	240-300	6-10	NZMH2-A300 107581	S



150	320	250-320	6-10	NZMH3-A320 109673	S
	400	320-400	6-10	NZMH3-A400 109674	S
	500	400-500	6-10	NZMH3-A500 109675	S

Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price list

Plug-in units

Part no.
Article no.

Price
See price list



Std. pack

Notes

Order base separately

Fixed mounting		Plug-in units		Notes
Part no.	Price	Part no.	Price	Std. pack
Article no.	See price list	Article no.	See price list	
NZMH1-A20 284376	B	NZMH1-A20-SVE 112795		1 off
NZMH1-A25 284377	B	NZMH1-A25-SVE 112796		
NZMH1-A32 284378	B	NZMH1-A32-SVE 112797		
NZMH1-A40 284379	B	NZMH1-A40-SVE 112798		
NZMH1-A50 284410	B	NZMH1-A50-SVE 112799		
NZMH1-A63 284411	B	NZMH1-A63-SVE 112800		
NZMH1-A80 284412	B	NZMH1-A80-SVE 112801		
NZMH1-A100 284413	B	NZMH1-A100-SVE 112802		
NZMH1-A125 284414	B	NZMH1-A125-SVE 112803		
NZMH1-A160 284415	B	—		
NZMH2-A20-BT 110296	B	NZMH2-A20-SVE 113351		
NZMH2-A25-BT 110297	B	NZMH2-A25-SVE 113352		
NZMH2-A32-BT 110298	B	NZMH2-A32-SVE 113353		
NZMH2-A40-BT 110287	B	NZMH2-A40-SVE 113328		
NZMH2-A50-BT 110288	B	NZMH2-A50-SVE 113329		
NZMH2-A63-BT 110289	B	NZMH2-A63-SVE 113330		
NZMH2-A80-BT 110290	B	NZMH2-A80-SVE 113331		
NZMH2-A100-BT 110291	B	NZMH2-A100-SVE 113332		
NZMH2-A125-BT 110292	B	NZMH2-A125-SVE 113333		
NZMH2-A160-BT 110293	B	NZMH2-A160-SVE 113334		
NZMH2-A200-BT 110294	B	NZMH2-A200-SVE 113335		
NZMH2-A250-BT 110295	B	NZMH2-A250-SVE 113336		
NZMH2-A250-BT 110286	B	—		
NZMH3-A320-BT 110305	B	NZMH3-A320-AVE 110861		
NZMH3-A400-BT 110306	B	NZMH3-A320-AVE 110862		
NZMH3-A500-BT 110307	B	NZMH3-A500-AVE 110863		

B = box terminals
S = screw terminals
For further terminal types see accessories





1.3

Circuit-breakers, switch-disconnectors

Auxiliary contacts, trip-indicating auxiliary contacts

1

NZM...M

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Rated operational power AC-3 50/60 Hz	Rated operational current	Part no. Article no.	Price See price list
		Overload releases	Short-circuit releases Non-delayed				
I_{cu} kA	$I_n=I_u$ A	I_n A	$I_n=I_n X \dots$	400V P W	400V I_b A		
							

Fixed mounting
with screw terminals

Basic switching capacity



Motor protection


- NZM...1-M...: with phase failure sensitivity
- Tripping class 10 A

25	40	32-40	8-14	18.5	36	Screw terminals as accessories	
	50	40-50	8-14	22	41		
	63	50-63	8-14	30	55		
	80	63-80	8-14	37	68		
	100	80-100	8-12.5	45	81		
25	125	100-125	8-14	45	99	Screw terminals as accessories	NZMB2-M125 265715 S
	160	125-160	8-14	75	134		NZMB2-M160 265716 S
	200	160-200	8-14	110	196		NZMB2-M200 265717 S
36	40	32-40	8-14	18.5	36	Screw terminals as accessories	
	50	40-50	8-14	22	41		
	63	50-63	8-14	30	55		
	80	63-80	8-14	37	68		
	100	80-100	8-12.5	45	81		
36	125	100-125	8-14	45	99	Screw terminals as accessories	NZMC2-M125 271424 S
	160	125-160	8-14	75	134		NZMC2-M160 271425 S
	200	160-200	8-14	110	196		NZMC2-M200 271426 S
50	40	32-40	8-14	18.5	36	Screw terminals as accessories	
	50	40-50	8-14	22	41		
	63	50-63	8-14	30	55		
	80	63-80	8-14	37	68		
	100	80-100	8-12.5	45	81		
50	125	100-125	8-14	45	99	Screw terminals as accessories	NZMN2-M125 265723 S
	160	125-160	8-14	75	134		NZMN2-M160 265724 S
	200	160-200	8-14	110	196		NZMN2-M200 265725 S

Comfort switching capacity



Normal switching capacity



NZM...M

Fixed mounting

with screw terminals

Part no.	Price
Article no.	See price list

Plug-in units

Part no.	Price	Std. pack	Notes
Article no.	See price list		
Order base separately			

B = box terminals
S = screw terminals
 For further terminal types see accessories

Tripping class	Tripping time T_p with load on all poles of 7.2 times set current value.
10A	$2\text{ s} < T_p \leq 10\text{ s}$
10	$4\text{ s} < T_p \leq 10\text{ s}$
20	$6\text{ s} < T_p \leq 20\text{ s}$
30	$9\text{ s} < T_p \leq 30\text{ s}$

Part no.	Price	Std. pack	Notes
NZMB1-M40 265710	B	1 off	IEC/EN 60947-4-1, IEC/EN 60947-2
NZMB1-M50 265711	B		The circuit-breakers fulfill all requirements for utilization category AC-3.
NZMB1-M63 265712	B		
NZMB1-M80 265713	B		
NZMB1-M100 265714	B		
Terminals as accessory	B		
NZMB1-M40-SVE 112709			
NZMB1-M50-SVE 112720			
NZMB1-M63-SVE 112721			
NZMB1-M80-SVE 112722			
NZMB1-M100-SVE 112723			
NZMB2-M125-SVE 113196			
NZMB2-M160-SVE 113197			
NZMB2-M200-SVE 113198			
NZMC1-M40 271398	B		
NZMC1-M50 271399	B		
NZMC1-M63 271400	B		
NZMC1-M80 271401	B		
NZMC1-M100 271402	B		
Terminals as accessory	B		
NZMC2-M125-SVE 113223			
NZMC2-M160-SVE 113224			
NZMC2-M200-SVE 113225			
NZMN1-M40 265718	B		
NZMN1-M50 265719	B		
NZMN1-M63 265720	B		
NZMN1-M80 265721	B		
NZMN1-M100 265722	B		
Terminals as accessory	B		
NZMN2-M125-SVE 113250			
NZMN2-M160-SVE 113251			
NZMN2-M200-SVE 113252			

1.3 Circuit-breakers, switch-disconnectors

Auxiliary contacts, trip-indicating auxiliary contacts

1

NZM...M

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Rated operational power AC-3 50/60 Hz	Rated operational current
		Overload releases	Short-circuit releases Non-delayed		
I_{cu} kA	$I_n=I_u$ A	I_r A	$I=I_n X \dots$	400V P W	400V I_o A

Fixed mounting
with screw terminals

Price
See price
list

Part no.
Article no.

High switching capacity



Motor protection

- NZM...1-M...: with phase failure sensitivity
- Tripping class 10 A

100	40	32-40	8-14	18.5	36		Screw terminals as accessories	
	50	40-50	8-14	22	41			
	30	50-63	8-14	30	55			
	80	63-80	8-14	37	68			
	100	80-100	8-12.5	45	81			
	20	16-20	350 A fixed	7.5	16	NZMH2-M20 281299	S	
	25	20-25	350 A fixed	11	21.7	NZMH2-M25 281300	S	
	32	25-32	10-14	15	29.3	NZMH2-M32 281301	S	
	150	40	32-40	8-14	18.5	36	NZMH2-M40 281302	S
		50	40-50	8-14	22	41	NZMH2-M50 281303	S
63		50-63	8-14	30	55	NZMH2-M63 281304	S	
80		63-80	8-14	37	68	NZMH2-M80 281305	S	
100		80-100	8-14	45	81	NZMH2-M100 281306	S	
125		100-125	8-14	45	99	NZMH2-M125 281307	S	
160		125-160	8-14	75	134	NZMH2-M160 281308	S	
200		160-200	8-14	110	196	NZMH2-M200 281309	S	

High switching capacity



Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price list

Plug-in units

Part no.
Article no.

Price
See price list

Std. pack

Notes

Order base separately







Fixed mounting		Plug-in units		Notes										
Part no.	Price	Part no.	Price	Notes										
Article no.	See price list	Article no.	See price list											
NZMH1-M40 115450	B	NZMH1-M40-SVE 115790		<p>B = box terminals S = screw terminals For further terminal types see accessories</p> <p>IEC/EN 60947-4-1, IEC/EN 60947-2</p> <p>The circuit-breakers fulfill all requirements for utilization category AC-3.</p> <table border="1"> <thead> <tr> <th>Tripping class</th> <th>Tripping time T_p with load on all poles of 7.2 times set current value.</th> </tr> </thead> <tbody> <tr> <td>10A</td> <td>$2 s < T_p \leq 10 s$</td> </tr> <tr> <td>10</td> <td>$4 s < T_p \leq 10 s$</td> </tr> <tr> <td>20</td> <td>$6 s < T_p \leq 20 s$</td> </tr> <tr> <td>30</td> <td>$9 s < T_p \leq 30 s$</td> </tr> </tbody> </table>	Tripping class	Tripping time T_p with load on all poles of 7.2 times set current value.	10A	$2 s < T_p \leq 10 s$	10	$4 s < T_p \leq 10 s$	20	$6 s < T_p \leq 20 s$	30	$9 s < T_p \leq 30 s$
Tripping class	Tripping time T_p with load on all poles of 7.2 times set current value.													
10A	$2 s < T_p \leq 10 s$													
10	$4 s < T_p \leq 10 s$													
20	$6 s < T_p \leq 20 s$													
30	$9 s < T_p \leq 30 s$													
NZMH1-M50 115451	B	NZMH1-M50-SVE 115791												
NZMH1-M63 115452	B	NZMH1-M63-SVE 115792												
NZMH1-M80 115453	B	NZMH1-M80-SVE 115793												
NZMH1-M100 115454	B	NZMH1-M100-SVE 115794												
Terminals as accessory	B	NZMH2-M20-SVE 113354												
		NZMH2-M25-SVE 113355												
		NZMH2-M32-SVE 113356												
		NZMH2-M40-SVE 113357												
		NZMH2-M50-SVE 113358												
		NZMH2-M63-SVE 113359												
		NZMH2-M80-SVE 113360												
		NZMH2-M100-SVE 113361												
		NZMH2-M125-SVE 113362												
		NZMH2-M160-SVE 113363												
		NZMH2-M200-SVE 113364												

1.3

Circuit-breakers, switch-disconnectors

Auxiliary contacts, trip-indicating auxiliary contacts

NZM...M

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range	Rated operational power AC-3 50/60 Hz	Rated operational current	Part no. Article no.	Price See price list
<p>Fixed mounting with screw terminals</p>						
<p>Short-circuit protection Motor protection in conjunction with overload relay</p> <ul style="list-style-type: none"> • With short-circuit releases • Without overload releases I_e 						
Basic switching capacity 	25	40	8-14	18.5	max.36	Screw terminals as accessories
		50	8-14	22	max.41	
		63	8-14	30	max.55	
		80	8-14	37	max.68	
		100	8-12.5	45	max.99	
	25	125	8-14	45	max.99	NZMB2-S125 265736 S
		160	8-14	75	max.134	NZMB2-S160 265737 S
		200	8-12.5	110	max.196	NZMB2-S200 265738 S
Comfort switching capacity 	36	40	8-14	18.5	max.36	Screw terminals as accessories
		50	8-14	22	max.41	
		63	8-14	30	max.55	
		80	8-14	37	max.68	
		100	8-12.5	45	max.99	
	36	125	8-14	45	max.99	NZMC2-S125 271427 S
		160	8-14	75	max.134	NZMC2-S160 271428 S
		200	8-12.5	110	max.196	NZMC2-S200 271429 S
	36	250	8-14	132	max.231	NZMC3-S250 109676 S
		320	8-14	160	max.279	NZMC3-S320 109677 S
		400	6-10	200	max.349	NZMC3-S400 109678 S
		500	6-10	250	max.437	NZMC3-S500 109679 S
		Normal switching capacity 	50	40	8-14	18.5
50	8-14			22	max.41	
63	8-14			30	max.55	
80	8-14			37	max.68	
100	8-12.5			45	max.99	

Fixed mounting

with screw terminals

Part no.	Price
Article no.	See price list

Plug-in/withdrawable units

Part no.	Price	Std. pack	Notes
Article no.	See price list		

Order base separately

B = box terminals
S = screw terminals

For further terminal types see accessories

IEC/EN 60947-4-1, IEC/EN 60947-2

The circuit-breakers fulfill all requirements for utilization category AC-3.






Tripping class **Tripping time T_p with load on all poles of 7.2 times set current value.**

10A	$2 s < T_p \leq 10 s$
10	$4 s < T_p \leq 10 s$
20	$6 s < T_p \leq 20 s$
30	$9 s < T_p \leq 30 s$

Selection of circuit-breakers without overload release when combining for instance with ZEV electronic motor-protective relays:

The tripping response of the motor-protective relay is matched by setting the tripping class to match the starting behavior of the motor to be protected.

	I_n in A	Maximum permissible tripping class
NZM...1-S...	40	30
	50	30
	63	30
	80	20
	100	15
NZM...2-S...	40	30
	50	30
	63	30
	80	30
	100	30
NZM...3-S...	125	30
	160	20
	200	10
	250	30
	320	30
	400	30
	500	20

NZMB1-S40 265726	B		NZMB1-S40-SVE 112724
NZMB1-S50 265727	B		NZMB1-S50-SVE 112725
NZMB1-S63 265728	B		NZMB1-S63-SVE 112726
NZMB1-S80 265729	B		NZMB1-S80-SVE 112727
NZMB1-S100 265730	B		NZMB1-S100-SVE 112728
Terminals as accessory			NZMB2-S125-SVE 113199
			NZMB2-S160-SVE 113200
			NZMB2-S200-SVE 113201
NZMC1-S40 271403	B		NZMC1-S40-SVE 112748
NZMC1-S50 271404	B		NZMC1-S50-SVE 112749
NZMC1-S63 271405	B		NZMC1-S63-SVE 112750
NZMC1-S80 271406	B		NZMC1-S80-SVE 112751
NZMC1-S100 271407	B		NZMC1-S100-SVE 112752
Terminals as accessory			NZMC2-S125-SVE 113226
			NZMC2-S160-SVE 113227
			NZMC2-S200-SVE 113228
			NZMC3-S250-AVE 113512
			NZMC3-S320-AVE 113513
			NZMC3-S400-AVE 113514
			NZMC3-S500-AVE 113515
NZMC1-S40 271403	B		NZMN1-S40-SVE 112768
NZMC1-S50 271404	B	NZMN1-S50-SVE 112769	
NZMC1-S63 271405	B	NZMN1-S63-SVE 112770	
NZMC1-S80 271406	B	NZMN1-S80-SVE 112771	
NZMC1-S100 271407	B	NZMN1-S100-SVE 112772	

1.3 Circuit-breakers, switch-disconnectors

Auxiliary contacts, trip-indicating auxiliary contacts

1 NZM...-S

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range	Rated operational power AC-3 50/60 Hz	Rated operational current	Fixed mounting with screw terminals	Part no. Article no.	Price See price list
I_{cu} kA	$I_n=I_u$ A	Short-circuit releases Non-delayed $I=I_n, X, \dots$	P W	I_e A			



Short-circuit protection

Motor protection in conjunction with overload relay

- With short-circuit releases
- Without overload releases I_s

Normal switching capacity	50	125	8-14	45	max.99	NZMN2-S125 265739	S
		160	8-14	75	max.134	NZMN2-S160 265740	S
		200	8-12.5	110	max.196	NZMN2-S200 265741	S
		250	8-14	132	max.231	NZMN3-S250 109680	S
		320	8-14	160	max.279	NZMN3-S320 109681	S
		400	6-10	200	max.349	NZMN3-S400 109682	S
		500	6-10	250	max.437	NZMN3-S500 109683	S
	High switching capacity	100	40	8-14	18.5	max.36	Screw terminals as accessories
		50	8-14	22	max.41		
		63	8-14	30	max.55		
		80	8-14	37	max.68		
		100	8-14	45	max.99		
	150	40	8-14	18.5	max.36	NZMH2-S40 265742	S
		50	8-14	22	max.41	NZMH2-S50 265743	S
		63	8-14	30	max.55	NZMH2-S63 265744	S
		80	8-14	37	max.68	NZMH2-S80 265745	S
		100	8-14	45	max.99	NZMH2-S100 265746	S
		125	8-14	45	max.99	NZMH2-S125 265747	S
		160	8-14	75	max.134	NZMH2-S160 265748	S
		200	8-12.5	110	max.196	NZMH2-S200 265749	S
		250	8-14	132	max.231	NZMH3-S250 109684	S
		320	8-14	160	max.279	NZMH3-S320 109685	S
		400	6-10	200	max.349	NZMH3-S400 109686	S
		500	6-10	250	max.437	NZMH3-S500 109687	S

Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price list

Plug-in/withdrawable units




Part no.
Article no.

Price
See price list

Std. pack

Notes

Order base separately

				B = box terminals S = screw terminals		
				For further terminal types see accessories		
Terminals as accessory		NZMN2-S125-SVE 113253	1 off	IEC/EN 60947-4-1, IEC/EN 60947-2		
		NZMN2-S160-SVE 113254		The circuit-breakers fulfill all requirements for utilization category AC-3.		
		NZMN2-S200-SVE 113255		Tripping class	Tripping time T_p with load on all poles of 7.2 times set current value.	
		NZMN3-S250-AVE 113523		10A	$2 s < T_p \cong 10 s$	
		NZMN3-S320-AVE 113524		10	$4 s < T_p \cong 10 s$	
		NZMN3-S400-AVE 113525		20	$6 s < T_p \cong 20 s$	
		NZMN3-S500-AVE 113526		30	$9 s < T_p \cong 30 s$	
NZMH1-S40 284436	B	NZMH1-S40-SVE 112805	1 off	Selection of circuit-breakers without overload release when combining for instance with ZEV electronic motor-protective relays:		
NZMH1-S50 284437	B	NZMH1-S50-SVE 112806		The tripping response of the motor-protective relay is matched by setting the tripping class to match the starting behavior of the motor to be protected.		
NZMH1-S63 284438	B	NZMH1-S63-SVE 112807			I_n in A	Maximum permissible tripping class
NZMH1-S80 284439	B	NZMH1-S80-SVE 112808			NZM...1-S...	40 30
NZMH1-S100 284440	B	NZMH1-S100-SVE 112809				50 30
Terminals as accessory		NZMH2-S40-SVE 113340			63 30	
		NZMH2-S50-SVE 113341			80 20	
		NZMH2-S63-SVE 113342			100 15	
		NZMH2-S80-SVE 113343		NZM...2-S...	40 30	
		NZMH2-S100-SVE 113344			50 30	
		NZMH2-S125-SVE 113345			63 30	
		NZMH2-S160-SVE 113346			80 30	
		NZMH2-S200-SVE 113347			100 30	
		NZMH3-S250-AVE 113566			125 30	
		NZMH3-S320-AVE 113567			160 20	
		NZMH3-S400-AVE 113568		200 10		
		NZMH3-S500-AVE 113569		NZM...3-S...	250 30	
					320 30	
					400 30	
					500 20	

1.3 Circuit-breakers, switch-disconnectors

Circuit-breakers, electronic releases, 3 pole

1 NZM...AE

Switching capacity
400/415 V
50/60 Hz
 I_{CU}
kA

Rated current =
Rated
uninterrupted
current
 $I_n = I_U$
A

Setting range

Overload releases

I_r
A



Short-circuit releases

Non-delayed
 $I_i = I_n \times \dots$




Fixed mounting
with screw terminals
Part no.
Article no.


Price
See price
list

System and cable protection

Normal switching capacity




50	630	315-630	2-8	NZMN3-AE630 259115	S
----	-----	---------	-----	------------------------------	---




50	630	315-630	2-12	NZMN4-AE630 265758	S
	800	400-800	2-12	NZMN4-AE800 265759	S
	1000	500-1000	2-12	NZMN4-AE1000 265760	S
	1250	630-1250	2-12	NZMN4-AE1250 265761	S
	1600	800-1600	2-12	NZMN4-AE1600 265762	S

High switching capacity




150	630	315-630	2-8	NZMH3-AE630 259118	S
-----	-----	---------	-----	------------------------------	---



85	630	315-630	2-12	NZMH4-AE630 265763	S
	800	400-800	2-12	NZMH4-AE800 265764	S
	1000	500-1000	2-12	NZMH4-AE1000 265765	S
	1250	630-1250	2-12	NZMH4-AE1250 265766	S
	1600	800-1600	2-12	NZMH4-AE1600 265767	S

Earth fault protection



50	250	125-250	2-11	NZMN3-AE250-T 110888	S
	400	200-400	2-11	NZMN3-AE400-T 110889	S
	630	315-630	2-8	NZMN3-AE630-T 110890	S
150	250	125-250	2-11	NZMH3-AE250-T 110894	S
	400	200-400	2-11	NZMH3-AE400-T 110895	S
	630	315-630	2-8	NZMH3-AE630-T 110896	S

Fixed mounting
with box terminals

Part no.
Article no.

Price
See price list

Withdrawable units






Part no.
Article no.

Price
See price list

Std. pack

Notes

Order base separately

				B = box terminals	
				S = screw terminals	
				For further terminal types see accessories	
NZMN3-AE630-BT 111656	B		NZMN3-AE630-AVE 110842	1 off	IEC/EN 60947-2 R.m.s. value measurement and "thermal memory"
Terminals as accessory			Withdrawable units as accessories		
Terminals as accessory			NZMH3-AE630-AVE 110851	1 off	
Terminals as accessory			Withdrawable units as accessories		
Terminals as accessory			NZMN3-AE250-T-AVE 113527	1 off	
			NZMN3-AE400-T-AVE 113528		
			NZMN3-AE630-T-AVE 113093		
			NZMH3-AE250-T-AVE 113570		
			NZMH3-AE400-T-AVE 113571		
			NZMH3-AE630-T-AVE 113572		

1.3 Circuit-breakers, switch-disconnectors

Circuit-breakers, electronic releases, 3 pole

1 NZM...VE

Switching capacity
400/415 V 50/60 Hz

I_{cu}
kA

Rated current =
Rated uninterrupted
current

$I_n=I_u$
A

Setting range

Overload
releases

I_r



Short-circuit releases

Non-delayed

$I_{sd}=I_r X \dots$



Delayed

$I_{sd}=I_r X \dots$










Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price
list

Systems protection, cable protection, selectivity, generator protection

Normal switching capacity	50	100	50-100	1200 A fixed	2-10	NZMN2-VE100 259122	S		
		160	80-160	1920 A fixed	2-10	NZMN2-VE160 259123	S		
		250	125-250	3000 A fixed	2-10	NZMN2-VE250 259124	S		
			250	125-250	2-11	2-10	NZMN3-VE250 259131	S	
			400	200-400	2-11	2-10	NZMN3-VE400 259132	S	
			630	315-630	2-8	1.5-7	NZMN3-VE630 259133	S	
				630	315-630	2-12	1.5-7	NZMN4-VE630 265768	S
				800	400-800	2-12	2-10	NZMN4-VE800 265769	S
				1000	500-1000	2-12	2-10	NZMN4-VE1000 265770	S
			1250	630-1250	2-12	2-10	NZMN4-VE1250 265771	S	
		1600	800-1600	2-12	2-10	NZMN4-VE1600 265772	S		
	High switching capacity	150	100	50-100	1200 A fixed	2-10	NZMH2-VE100 259125	S	
			160	80-160	1920 A fixed	2-10	NZMH2-VE160 259126	S	
		250	125-250	3000 A fixed	2-10	NZMH2-VE250 259127	S		
			250	125-250	2-11	2-10	NZMH3-VE250 259134	S	
			400	200-400	2-11	2-10	NZMH3-VE400 259135	S	
			630	315-630	2-8	1.5-7	NZMH3-VE630 259136	S	
				85	315-630	2-12	1.5-7	NZMH4-VE630 265773	S
				800	400-800	2-12	2-10	NZMH4-VE800 265774	S
	1000		500-1000	2-12	2-10	NZMH4-VE1000 265775	S		
	1250		630-1250	2-12	2-10	NZMH4-VE1250 265776	S		
	1600	800-1600	2-12	2-10	NZMH4-VE1600 265777	S			
Earth fault protection	50	250	125-250	2-11	2-10	NZMN3-VE250-T 110891	S		
		400	200-400	2-11	2-10	NZMN3-VE400-T 110892	S		
		630	315-630	2-8	1.5-7	NZMN3-VE630-T 110893	S		
	150		250	125-250	2-11	2-10	NZMH3-VE250-T 110897	S	
			400	200-400	2-11	2-10	NZMH3-VE400-T 110898	S	
			630	315-630	2-8	1.5-7	NZMH3-VE630-T 110899	S	

Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price list

Withdrawable units

Part no.
Article no.

Price
See price list

Std. pack

Notes

Order base separately

Fixed mounting		Withdrawable units		Notes
Part no.	Price	Part no.	Price	Notes
Article no.	See price list	Article no.	See price list	
Terminals as accessory		Order base separately		B = box terminals S = screw terminals For further terminal types see accessories
		NZMN2-VE100-SVE 113247		1 off IEC/EN 60947-2
		NZMN2-VE160-SVE 113248		R.m.s. value measurement and "thermal memory"
		NZMN2-VE250-SVE 113249		Adjustable delay setting t_r • 2 – 20 s at 6 x I_n and infinite (without overload release)
NZMN3-VE400-BT 111659	1,467.37 43	NZMN3-VE250-AVE 110843		Adjustable delay t_{sd} • Steps: 0, 20, 60, 100, 200, 300, 500, 750, 1000 ms
NZMN3-VE630-BT 111730	1,914.22 43	NZMN3-VE400-AVE 110844		i^2t constant function • NZM2 fixed OFF • NZM3, NZM4 switchable
Terminals as accessory		NZMN3-VE630-AVE 110845		
Terminals as accessory		Terminals as accessory		
		NZMH2-VE100-SVE 113337		1 off
		NZMH2-VE160-SVE 113338		
		NZMH2-VE250-SVE 113339		
NZMH3-VE400-BT 111731	1,668.52 43	NZMH3-VE250-AVE 110852		
NZMH3-VE630-BT 111732	2,079.92 43	NZMH3-VE400-AVE 110853		
Terminals as accessory		NZMH3-VE630-AVE 110854		
Terminals as accessory		Withdrawable units as accessories		
Terminals as accessory		Terminals as accessory		
		NZMN3-VE250-T-AVE 113529		1 off
		NZMN3-VE400-T-AVE 113530		
		NZMN3-VE630-T-AVE 113531		
		NZMH3-VE250-T-AVE 113573		
		NZMH3-VE400-T-AVE 113574		
		NZMH3-VE630-T-AVE 113575		

1.3 Circuit-breakers, switch-disconnectors

Circuit-breakers, electronic releases, 3 pole

1 **NZM...M**

HPL17026EN

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current	Setting range		Rated operational power AC-3 50/60 Hz		Rated operational current AC-3 50/60 Hz		Part no. Article no.	Price See price list
		Overload releases	Short-circuit releases	400V P kW	690V P kW	400V I _e A	690V I _e A		
I _{cu} kA	I _n =I _u A	I _r A	Non-delayed I _n =I _n X ...						



Fixed mounting
with screw terminals

Motor protection

With phase-failure sensitivity

Normal switching capacity

50	90	45-90	2-14	45	75	81	78		
	140	70-140	2-14	75	132	134	134	NZM2-ME90	S
	220	110-220	2-14	110	200	196	202	265778 NZM2-ME140	S
	220	110-220	2-14	110	200	196	202	265779 NZM2-ME220	S
	350	175-350	2-14	200	315	349	316	NZM3-ME220	S
	450	225-450	2-12	250	450	437	446	265781 NZM3-ME350	S
	450	225-450	2-12	250	450	437	446	265782 NZM3-ME450	S
	550	275-550	2-14	315	560	544	550	NZM4-ME550	S
	875	438-875	2-14	500	600	820	588	265783 NZM4-ME875	S
	1400	700-1400	2-14	630	600	1066	588	265784 NZM4-ME1400	S







High switching capacity

150	90	45-90	2-14	45	45	81	78		
	140	70-140	2-14	75	132	134	134	NZMH2-ME90	S
	220	110-220	2-14	110	200	196	202	265786 NZMH2-ME140	S
	220	110-220	2-14	110	200	196	202	265787 NZMH2-ME220	S
	350	175-350	2-14	200	315	349	316	265788 NZMH3-ME220	S
	450	225-450	2-12	250	450	437	446	265789 NZMH3-ME350	S
	450	225-450	2-12	250	450	437	446	265790 NZMH3-ME450	S
	550	275-550	2-14	315	560	544	550	284469 NZMH4-ME550	S
	875	438-875	2-14	500	600	820	588	265791 NZMH4-ME875	S
	1400	700-1400	2-14	630	600	1066	588	265792 NZMH4-ME1400	S

Plug-in units

Part no. Article no.	Price See price list	Std. pack	Notes
-------------------------	----------------------------	--------------	-------

Order base
separately




			<p>B = box terminals S = screw terminals For further terminal types see accessories</p>
	NZMN2-ME90-SVE 113256	1 off	<p>IEC/EN 60947-4-1, IEC/EN 60947-2</p> <p>The circuit-breakers fulfill all requirements for utilization category AC-3</p> <p>R.m.s. value measurement and "thermal memory"</p> <p>Adjustable delay setting t_d</p> <ul style="list-style-type: none"> • 2–20 s at 6 x I_n and infinite (without overload release)
	NZMN2-ME140-SVE 113257		
	NZMN2-ME220-SVE 113258		
	NZMN3-ME220-AVE 110846		
	NZMN3-ME350-AVE 110847		
	NZMN3-ME450-AVE 110848		
	Withdrawable units as accessories		
	NZMH2-ME90-SVE 113348	1 off	
	NZMH2-ME140-SVE 113349		
	NZMH2-ME220-SVE 113350		
	NZMH3-ME220-AVE 110855		
	NZMH3-ME350-AVE 110856		
	NZMH3-ME450-AVE 110857		
	Withdrawable units as accessories		

1.3

Circuit-breakers, switch-disconnectors

Circuit-breakers, thermomagnetic releases, 4 pole

NZM...A

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current		Setting range		Short-circuit releases Non-delayed $I_i = I_n \times \dots$
	Phase conductors	Neutral conductor	Overload releases	Phase conductors	
I_{cu}	$I_n = I_u$	$I_r \times \% \text{ of phase conductor}$	I_r	I_r	
kA	A	%	A	A	
					

Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price list


System and cable protection

Basic switching capacity



Basic switching capacity	25	20	100	15-20	15...20	350 A fixed	Screw terminals as accessories	
		25	100	20-25	20...25	350 A fixed		
		32	100	25-32	25...32	350 A fixed		
		40	100	32-40	32...40	8-10		
		50	100	40-50	40...50	6-10		
		63	100	50-63	50...63	6-10		
		80	100	63-80	63...80	6-10		
		100	100	80-100	80...100	6-10		
		125	100	100-125	100...125	6-10		
		160	100	125-160	125...160	1280 A fixed		

Basic switching capacity



		160	100	125-160	125...160	6-10	NZMB2-4-A160 265849	S
		160	60	125-160	80...100	6-10	NZMB2-4-A160/100 265850	S
		200	100	160-200	160...200	6-10	NZMB2-4-A200 265852	S
		200	60	160-200	100...125	6-10	NZMB2-4-A200/125 265853	S
		250	100	200-250	200...250	6-10	NZMB2-4-A250 265855	S
		250	60	200-250	125...160	6-10	NZMB2-4-A250/160 265856	S
		300	100	240-300	240...300	6-10	NZMB2-4-A300 107582	S
		300	60	240-300	160...200	6-10	NZMB2-4-A300/200 107583	S

Comfort switching capacity



Comfort switching capacity	36	20	100	15-20	15...20	350 A fixed	Screw terminals as accessories	
		25	100	20-25	20...25	350 A fixed		
		32	100	25-32	25...32	350 A fixed		
		40	100	32-40	32...40	8-10		
		50	100	40-50	40...50	6-10		
		63	100	50-63	50...63	6-10		
		80	100	63-80	63...80	6-10		
		100	100	80-100	80...100	6-10		
		125	100	100-125	100...125	6-10		
		160	100	125-160	125...160	1280 A fixed		

Fixed mounting
with box terminals

Part no.
Article no.

Price
See price
list

Plug-in units


Part no.
Article no.

Price
See price
list

Std. pack

Notes

Order base separately


Fixed mounting		Plug-in units			
Part no.	Price	Part no.	Price	Std. pack	Notes
Article no.	See price list	Article no.	See price list		
<p>B = box terminals S = screw terminals</p> <p>For further terminal types see accessories</p>					
NZMB1-4-A20 281237	B –	–	–	1 off	IEC/EN 60947-2
NZMB1-4-A25 281239	B	–	–		Set value for neutral conductor is same as set value I _n for main pole.
NZMB1-4-A32 281241	B	–	–		
NZMB1-4-A40 265799	B	–	–		
NZMB1-4-A50 265801	B	–	–		
NZMB1-4-A63 265803	B	–	–		
NZMB1-4-A80 265805	B	–	–		
NZMB1-4-A100 265807	B	–	–		
NZMB1-4-A125 265809	B	–	–		
NZMB1-4-A160 281243	B	–	–		
Terminals as accessory					
					
		NZMB2-4-A160-SVE 113209			
		NZMB2-4-A160/100-SVE 113210			
		NZMB2-4-A200-SVE 113212			
		NZMB2-4-A200/125-SVE 113213			
		NZMB2-4-A250-SVE 113215			
		NZMB2-4-A250/160-SVE 113216			
		–			
		–			
NZMC1-4-A20 283300	B –	–	–	1 off	
NZMC1-4-A25 283302	B	–	–		
NZMC1-4-A32 283304	B	–	–		
NZMC1-4-A40 271408	B	–	–		
NZMC1-4-A50 271410	B	–	–		
NZMC1-4-A63 271412	B	–	–		
NZMC1-4-A80 271414	B	–	–		
NZMC1-4-A100 271416	B	–	–		
NZMC1-4-A125 271418	B	–	–		
NZMC1-4-A160 283306	B	–	–		

1.3 Circuit-breakers, switch-disconnectors

Circuit-breakers, thermomagnetic releases, 4 pole


1 NZM...-4-A

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current		Setting range		Short-circuit releases Non-delayed $I_i = I_n \times \dots$	Fixed mounting with screw terminals Part no. Article no.	Price See price list
	Phase conductors	Neutral conductor	Overload releases				
			I_r	I_r			
I_{cu}	$I_n = I_u$	$I_r \times \% \text{ of phase conductor}$	I_r	I_r			
kA	A	%	A	A			



System and cable protection

Comfort switching capacity



36	125	100	100-125	100...125	6-10	NZMC2-4-A125 271430	S
	160	100	125-160	125...160	6-10	NZMC2-4-A160 271432	S
	160	60	125-160	80...100	6-10	NZMC2-4-A160/100 271433	S
	200	100	160-200	160...200	6-10	NZMC2-4-A200 271435	S
	200	60	160-200	100...125	6-10	NZMC2-4-A200/125 271436	S
	250	100	200-250	200...250	6-10	NZMC2-4-A250 271438	S
	250	60	200-250	125...160	6-10	NZMC2-4-A250/160 271439	S
	300	100	240-300	240...300	6-10	NZMC2-4-A300 107584	S
	300	60	240-300	160...200	6-10	NZMC2-4-A300/200 107585	S
	320	100	250-320	250...320	6-10	NZMC3-4-A320 109688	S
	320	60	250-320	160...200	6-10	NZMC3-4-A320/200 109689	S
	400	100	320-400	320...400	6-10	NZMC3-4-A400 109690	S
	400	60	320-400	200...250	6-10	NZMC3-4-A400/250 109691	S
	500	100	400-500	400...500	6-10	NZMC3-4-A500 109692	S
	500	60	400-500	250...320	6-10	NZMC3-4-A500/320 109693	S


Normal switching capacity



50	20	100	15-20	15...20	350 A fixed	Screw terminals as accessories
	25	100	20-25	20...25	350 A fixed	
	32	100	25-32	25...32	350 A fixed	
	40	100	32-40	32...40	8-10	
	50	100	40-50	40...50	6-10	
	63	100	50-63	50...63	6-10	
	80	100	63-80	63...80	6-10	
	100	100	80-100	80...100	6-10	
	125	100	100-125	100...125	6-10	
	160	100	125-160	125...160	1280 A fixed	

Fixed mounting
with screw terminals

Plug-in units

Part no. Article no.	Price See price list	Part no. Article no.	Price See price list	Std. pack	Notes
Order base separately					
<p>B = box terminals S = screw terminals For further terminal types see accessories</p>					
Terminals as accessory			<p>NZMC2-4-A125-SVE 113231</p> <hr/> <p>NZMC2-4-A160-SVE 113233</p> <hr/> <p>NZMC2-4-A160/100-SVE 113234</p> <hr/> <p>NZMC2-4-A200-SVE 113236</p> <hr/> <p>NZMC2-4-A200/125-SVE 113237</p> <hr/> <p>NZMC2-4-A250-SVE 113239</p> <hr/> <p>NZMC2-4-A250/160-SVE 113240</p> <hr/> <p>–</p> <hr/> <p>–</p> <hr/> <p>NZMC3-4-A320-AVE 113516</p> <hr/> <p>NZMC3-4-A320/200-AVE 113517</p> <hr/> <p>NZMC3-4-A400-AVE 113518</p> <hr/> <p>NZMC3-4-A400/250-AVE 113519</p> <hr/> <p>NZMC3-4-A500-AVE 113520</p> <hr/> <p>NZMC3-4-A500/320-AVE 113521</p>	1 off	IEC/EN 60947-2 Set value for neutral conductor is same as set value I _n for main pole.
NZMN1-4-A20 281245	B	–		1 off	
NZMN1-4-A25 281247	B	–			
NZMN1-4-A32 281249	B	–			
NZMN1-4-A40 265811	B	–			
NZMN1-4-A50 265813	B	–			
NZMN1-4-A63 265815	B	–			
NZMN1-4-A80 265817	B	–			
NZMN1-4-A100 265819	B	–			
NZMN1-4-A125 265821	B	–			
NZMN1-4-A160 281251	B	–			

1.3

Circuit-breakers, switch-disconnectors


Circuit-breakers, thermomagnetic releases, 4 pole

1 NZM...-4-A

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current		Setting range Overload releases		Short-circuit releases Non-delayed	Fixed mounting with screw terminals	Part no. Article no.	Price See price list
	Phase conductors	Neutral conductor	I_r	I_r				
I_{cu} kA	$I_n=I_u$ A	$I_r \times \% \text{ of phase conductor \%}$	I_r A	I_r A	$I_r=I_n \times \dots$			

System and cable protection

Normal switching capacity



50	160	100	125-160	125...160	6-10	NZMN2-4-A160	S
						265860	
	160	60	125-160	80...100	6-10	NZMN2-4-A160/100	S
						265861	
	200	100	160-200	160...200	6-10	NZMN2-4-A200	S
						265863	
	200	60	160-200	100...125	6-10	NZMN2-4-A200/125	S
						265864	
	250	100	200-250	200...250	6-10	NZMN2-4-A250	S
						265866	
	250	60	200-250	125...160	6-10	NZMN2-4-A250/160	S
						265867	
	300	100	240-300	240...300	6-10	NZMN2-4-A300	S
						107586	
320	300	60	240-300	160...200	6-10	NZMN2-4-A300/200	S
						107587	
	320	100	250-320	250...320	6-10	NZMN3-4-A320	S
						109694	
	320	60	250-320	160...200	6-10	NZMN3-4-A320/200	S
						109695	
	400	100	320-400	320...400	6-10	NZMN3-4-A400	S
						109696	
	400	60	320-400	200...250	6-10	NZMN3-4-A400/250	S
						109697	
500	500	100	400-500	400...500	6-10	NZMN3-4-A500	S
						109698	
	500	60	400-500	250...320	6-10	NZMN3-4-A500/320	S
					109699		

High switching capacity



100	20	100	15-20	15...20	350 A fixed	Screw terminals as accessories
	25	100	20-25	20...25	350 A fixed	
	32	100	25-32	25...32	350 A fixed	
	40	100	32-40	32...40	8-10	
	50	100	40-50	40...50	6-10	
	63	100	50-63	50...63	6-10	
	80	100	63-80	63...80	6-10	
	100	100	80-100	80...100	6-10	
	125	100	100-125	100...125	6-10	
	160	100	125-160	125...160	1280 A fixed	

NZM...-4-A

Fixed mounting
with box terminals

Part no.
Article no.

Price
See price
list

Plug-in units

Part no.
Article no.

Price
See price
list

Std. pack


Notes

Order base separately

B = box terminals
S = screw terminals

For further terminal types see
accessories

Terminals as accessory



NZMN2-4-A160-SVE
113266

NZMN2-4-A160/100-SVE
113267

NZMN2-4-A200-SVE
113269

NZMN2-4-A200/125-SVE
113270

NZMN2-4-A250-SVE
113272

NZMN2-4-A250/160-SVE
113273

—

—

NZMN3-4-A320-AVE
113532

NZMN3-4-A320/200-AVE
113533

NZMN3-4-A400-AVE
113534

NZMN3-4-A400/250-AVE
113535

NZMN3-4-A500-AVE
113536

NZMN3-4-A500/320-AVE
113537

1 off

IEC/EN 60947-2

Set value for neutral
conductor is same as set
value I_n for main pole.

NZMH1-4-A20
284416

B

—

1 off

NZMH1-4-A25
284418

B

—

NZMH1-4-A32
284420

B

—

NZMH1-4-A40
284422

B

—

NZMH1-4-A50
284424

B

—

NZMH1-4-A63
284426

B

—

NZMH1-4-A80
284428

B

—

NZMH1-4-A100
284430

B

—

NZMH1-4-A125
284432

B

—

NZMH1-4-A160
284434

B

—

1.3 Circuit-breakers, switch-disconnectors


Circuit-breakers, thermomagnetic releases, 4 pole

1 NZM...-4-A


Switching capacity 400/415 V 50/60 Hz I_{cu} kA	Rated current = Rated uninterrupted current		Setting range			Fixed mounting with screw terminals Part no. Article no.	Price See price list
	Phase conductors $I_n = I_u$ A	Neutral conductor I_r x % of phase conductor % A	Overload releases		Short-circuit releases Non-delayed $I_i = I_n \times \dots$		
			I_r A	Phase conductors I_r A			

System and cable protection

High switching capacity



150	20	100	15-20	15...20	350 A fixed	NZMH2-4-A20 281287	S
	25	100	20-25	20...25	350 A fixed	NZMH2-4-A25 281289	S
	32	100	25-32	25...32	350 A fixed	NZMH2-4-A32 281291	S
	40	100	32-40	32...40	6-10	NZMH2-4-A40 265823	S
	50	100	40-50	40...50	6-10	NZMH2-4-A50 265825	S
	63	100	50-63	50...63	6-10	NZMH2-4-A63 265827	S
	80	100	63-80	63...80	6-10	NZMH2-4-A80 265829	S
	100	100	80-100	80...100	6-10	NZMH2-4-A100 265831	S
	125	100	100-125	100...125	6-10	NZMH2-4-A125 265833	S
	160	100	125-160	125...160	6-10	NZMH2-4-A160 265871	S
	160	60	125-160	80...100	6-10	NZMH2-4-A160/100 265872	S
	200	100	160-200	160...200	6-10	NZMH2-4-A200 265874	S
	200	60	160-200	100...125		NZMH2-4-A200/125 265875	S
	250	100	200-250	200...250	6-10	NZMH2-4-A250 265877	S
	250	60	200-250	125...160	6-10	NZMH2-4-A250/160 265878	S
	300	100	240-300	240...300	6-10	NZMH2-4-A300 107588	S
300	60	240-300	160...200	6-10	NZMH2-4-A300/200 107589	S	
150	320	100	250-320	250...320	6-10	NZMH3-4-A320 109700	S
	320	60	250-320	160...200	6-10	NZMH3-4-A320/200 109701	S
	400	100	320-400	320...400	6-10	NZMH3-4-A400 109702	S
	400	60	320-400	200...250	6-10	NZMH3-4-A400/250 109703	S
	500	100	400-500	400...500	6-10	NZMH3-4-A500 109704	S
	500	60	400-500	250...320	6-10	NZMH3-4-A500/320 109705	S



Fixed mounting
with box terminals

Part no.
Article no.

Price
See price
list

Plug-in units

Part no.
Article no.

Price
See price
list

Std. pack

Notes

Order base separately

		B = box terminals	S = screw terminals	
Terminals as accessory			For further terminal types see accessories	
			IEC/EN 60947-2 Set value for neutral conductor is same as set value I _n for main pole.	
		NZMH2-4-A20-SVE	1 off	
		113396		
		NZMH2-4-A25-SVE		
		113398		
		NZMH2-4-A32-SVE		
		113400		
		NZMH2-4-A40-SVE		
		113367		
		NZMH2-4-A50-SVE		
		113369		
		NZMH2-4-A63-SVE		
		113371		
		NZMH2-4-A80-SVE		
		113373		
		NZMH2-4-A100-SVE		
		113375		
		NZMH2-4-A125-SVE		
		113377		
	NZMH2-4-A160-SVE			
	113379			
	NZMH2-4-A160/100-SVE			
	113380			
	NZMH2-4-A200-SVE			
	113382			
	NZMH2-4-A200/125-SVE			
	113383			
	NZMH2-4-A250-SVE			
	113385			
	NZMH2-4-A250/160-SVE			
	113386			
	—			
	—			
		NZMH3-4-A320-AVE	1 off	
		113578		
		NZMH3-4-A320/200-AVE		
		113579		
		NZMH3-4-A400-AVE		
		113580		
		NZMH3-4-A400/250-AVE		
	113581			
	NZMH3-4-A500-AVE			
	113582			
	NZMH3-4-A500/320-AVE			
	113583			

1.3

Circuit-breakers, switch-disconnectors

Circuit-breakers, electronic releases, 4 pole

1



NZM...-4-AE

System and cable protection

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current		Setting range		Short-circuit releases		Fixed mounting with screw terminals Part no. Article no.	Price See price list
	Phase conductors	Neutral conductor	Overload releases	Phase conductors	Non- delayed	Delayed		
I_{cu}	$I_n = I_u$	$I_n \times \% \text{ of phase conductor}$	I_r	I_r	$I_i = I_n \times \dots$	$I_{sd} = I_r \times \dots$		
kA	A	%	A	A				





Normal switching capacity




50	630	100	315-630	315...630	2-8	–	NZMN3-4-AE630 265894	S	
	630	60	315-630	200...400	2-8	–	NZMN3-4-AE630/400 265895	S	
	800	100	400-800	400...800	2-12	–	NZMN4-4-AE800 265909	S	
	800	60	400-800	250...500	2-12	–	NZMN4-4-AE800/500 265910	S	
	1000	100	500-1000	500...1000	2-12	–	NZMN4-4-AE1000 265912	S	
	1000	60	500-1000	315...630	2-12	–	NZMN4-4-AE1000/630 265913	S	
	1250	100	630-1250	630...1250	2-12	–	NZMN4-4-AE1250 265915	S	
	1250	60	630-1250	400...800	2-12	–	NZMN4-4-AE1250/800 265916	S	
	1600	100	800-1600	800...1600	2-12	–	NZMN4-4-AE1600 265918	S	
	1600	60	800-1600	500...1000	2-12	–	NZMN4-4-AE1600/1000 265919	S	
150	630	100	315-630	315...630	2-8	–	NZMH3-4-AE630 265900	S	
	630	60	315-630	200...400	2-8	–	NZMH3-4-AE630/400 265901	S	
	85	800	100	400-800	400...800	2-12	–	NZMH4-4-AE800 265921	S
		800	60	400-800	250...500	2-12	–	NZMH4-4-AE800/500 265922	S
	1000	100	500-1000	500...1000	2-12	–	NZMH4-4-AE1000 265924	S	
	1000	60	500-1000	315...630	2-12	–	NZMH4-4-AE1000/630 265925	S	
	1250	100	630-1250	630...1250	2-12	–	NZMH4-4-AE1250 265927	S	
	1250	60	630-1250	400...800	2-12	–	NZMH4-4-AE1250/800 265928	S	
	1600	100	800-1600	800...1600	2-12	–	NZMH4-4-AE1600 265930	S	
	1600	60	800-1600	500...1000	2-12	–	NZMH4-4-AE1600/1000 265931	S	
50	400	100	200-400	200...400	2-11	–	NZMN3-4-AE400-T 110902	S	
	400	60	200-400	125...250	2-11	–	NZMN3-4-AE400/250-T 110903	S	
	630	100	315-630	315...630	2-8	–	NZMN3-4-AE630-T 110904	S	
	630	60	315-630	200...400	2-8	–	NZMN3-4-AE630/400-T 110905	S	
	150	400	100	200-400	200...400	2-11	–	NZMH3-4-AE400-T 110906	S
		400	60	200-400	125...250	2-11	–	NZMH3-4-AE400/250-T 110907	S
		630	100	315-630	315...630	2-8	–	NZMH3-4-AE630-T 110908	S
		630	60	315-630	200...400	2-8	–	NZMH3-4-AE630/400-T 110909	S

High switching capacity



Earth fault protection



Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price list

Plug-in units






Part no.
Article no.

Price
See price list

Std. pack

Notes

Order base separately

				B = box terminals	S = screw terminals
NZMN3-4-AE630-BT 111658 Terminals as accessory	B 	NZMN3-4-AE630-AVE	110875	1 off	For further terminal types see accessories
		NZMN3-4-AE630/400-AVE	113544		IEC/EN 60947-2
				R.m.s. value measurement and "thermal memory"	
		Withdrawable units as accessories		Set value for neutral conductor is same as set value I _n for main pole.	
					
		NZMH3-4-AE630-AVE		110879	1 off
		NZMH3-4-AE630/400-AVE		113590	
		Withdrawable units as accessories			
					
					
Terminals as accessory		NZMN3-4-AE400-T-AVE	113538	1 off	
		NZMN3-4-AE400/250-T-AVE	113539		
		NZMN3-4-AE630-T-AVE	113540		
		NZMN3-4-AE630/400-T-AVE	113541		
		NZMH3-4-AE400-T-AVE	113584		
		NZMH3-4-AE400/250-T-AVE	113585		
		NZMH3-4-AE630-T-AVE		113586	
		NZMH3-4-AE630/400-T-AVE		113587	




1.3 Circuit-breakers, switch-disconnectors

Circuit-breakers, electronic releases, 4 pole

1 NZM...-4-VE

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current		Setting range Overload releases		Short-circuit releases		Fixed mounting with screw terminals Part no. Article no.	Price See price list
	Phase conductors	Neutral conductor		Phase conductors	Non-delayed	Delayed		
I_{cu} kA	$I_n=I_u$ A	I_f x % of phase conductor %	I_r A	I_r A	$I_s=I_n \times \dots$	$I_{sd}=I_f \times \dots$		

Normal switching capacity



50	100	100	50-100	50...100	2-10	NZMN2-4-VE100 265933	S
	160	100	80-160	80...160	2-10	NZMN2-4-VE160 265935	S
	160	60	80-160	50...100	2-10	NZMN2-4-VE160/100 265936	S
	250	100	125-250	125...250	2-10	NZMN2-4-VE250 265938	S
	250	60	125-250	80...160	2-10	NZMN2-4-VE250/160 265939	S
	400	100	200-400	200...400	2-10	NZMN3-4-VE400 265957	S
	400	60	200-400	125...250	2-10	NZMN3-4-VE400/250 265958	S
	630	100	315-630	315...630	1.5-7	NZMN3-4-VE630 265960	S
	630	60	315-630	200...400	1.5-7	NZMN3-4-VE630/400 265961	S
	800	100	400-800	400...800	2-10	NZMN4-4-VE800 265975	S
	800	60	400-800	250...500	2-10	NZMN4-4-VE800/500 265976	S
	1000	100	500-1000	500...1000	2-10	NZMN4-4-VE1000 265978	S
	1000	60	500-1000	315...630	2-10	NZMN4-4-VE1000/630 265979	S
	1250	100	630-1250	630...1250	2-10	NZMN4-4-VE1250 265981	S
	1250	60	630-1250	400...800	2-10	NZMN4-4-VE1250/800 265982	S
	1600	100	800-1600	800...1600	2-10	NZMN4-4-VE1600 265984	S
	1600	60	800-1600	500...1000	2-10	NZMN4-4-VE1600/1000 265985	S

Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price list

Plug-in units




Part no.
Article no.

Price
See price list

Std. pack

Notes

Order base separately




				B = box terminals	
				S = screw terminals	
				For further terminal types see accessories	
Terminals as accessory		NZMN2-4-VE100-SVE	113275	1 off	IEC/EN 60947-2
		NZMN2-4-VE160-SVE	113277		Set value for neutral conductor is same as set value I _n for main pole.
		NZMN2-4-VE160/100-SVE	113278		R.m.s. value measurement and "thermal memory"
		NZMN2-4-VE250-SVE	113280		Adjustable delay setting t
		NZMN2-4-VE250/160-SVE	113281		<ul style="list-style-type: none"> • 2 – 20 s at 60 Hz and infinite (without overload release) – NZM...3-4-VE400(630): 2 – 14 s at 60 Hz and infinite (without overload release)
		NZMN3-4-VE400-AVE	110876		Adjustable delay t
		NZMN3-4-VE400/250-AVE	113546		<ul style="list-style-type: none"> • Steps: 0, 20, 60, 100, 200, 300, 500, 750, 1000 ms
		NZMN3-4-VE630-AVE	110877		i ² t constant function
		NZMN3-4-VE630/400-AVE	113548		<ul style="list-style-type: none"> • NZM2 fixed OFF • NZM3, NZM4 switchable
		Withdrawable units as accessories			

1.3 Circuit-breakers, switch-disconnectors

Circuit-breakers, electronic releases, 4 pole

1 NZM...-4-VE

High switching capacity



Earth fault protection

Switching capacity 400/415 V 50/60 Hz	Rated current = Rated uninterrupted current		Setting range Overload releases		Short-circuit releases		Part no. Article no.	Price See price list
	Phase conductors	Neutral conductor		Phase conductors	Non-delayed	Delayed		
I_{cu} kA	$I_n=I_u$ A	I_r x % of phase conductor %	I_r A	I_r A	$I_s=I_n \times \dots$	$I_{sd}= I_r \times \dots$		
150	100	100	50-100	50...100	1200 A fixed	2-10	NZMH2-4-VE100 265941	S
	160	100	80-160	80...160	1920 A fixed	2-10	NZMH2-4-VE160 265943	S
	160	60	80-160	50...100	1920 A fixed	2-10	NZMH2-4-VE160/100 265944	S
	250	100	125-250	125...250	3000 A fixed	2-10	NZMH2-4-VE250 265946	S
	250	60	125-250	80...160	3000 A fixed	2-10	NZMH2-4-VE250/160 265947	S
	400	100	200-400	200...400	2-11	2-10	NZMH3-4-VE400 265963	S
	400	60	200-400	125...250	2-11	2-10	NZMH3-4-VE400/250 265964	S
	630	100	315-630	315...630	2-8	1.5-7	NZMH3-4-VE630 265966	S
	630	60	315-630	200...400	2-8	1.5-7	NZMH3-4-VE630/400 265967	S
	85	800	100	400-800	400...800	2-12	2-10	NZMH4-4-VE800 265987
800		60	400-800	250...500	2-12	2-10	NZMH4-4-VE800/500 265988	S
1000		100	500-1000	500...1000	2-12	2-10	NZMH4-4-VE1000 265990	S
1000		60	500-1000	315...630	2-12	2-10	NZMH4-4-VE1000/630 265991	S
1250		100	630-1250	630...1250	2-12	2-10	NZMH4-4-VE1250 265993	S
1250		60	630-1250	400...800	2-12	2-10	NZMH4-4-VE1250/800 265994	S
1600		100	800-1600	800...1600	2-12	2-10	NZMH4-4-VE1600 265996	S
1600		60	800-1600	500...1000	2-12	2-10	NZMH4-4-VE1600/1000 265997	S
50		400	100	200-400	200...400	2-11	2-10	–
	630	100	315-630	315...630	2-8	1.5-7	–	
150	400	100	200-400	200...400	2-11	2-10	–	
	630	100	315-630	315...630	2-8	1.5-7	–	

Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price
list

Plug-in units





Part no.
Article no.

Price
See price
list

Std.
pack

Notes

Order base
separately

Terminals as accessory		NZMH2-4-VE100-SVE 113388	1 off	B = box terminals S = screw terminals For further terminal types see accessories
		NZMH2-4-VE160-SVE 113390		Set value for neutral conductor is same as set value I _n for main pole.
		NZMH2-4-VE160/100-SVE 113391		
		NZMH2-4-VE250-SVE 113393		R.m.s. value measurement and "thermal memory"
		NZMH2-4-VE250/160-SVE 113394		
		NZMH3-4-VE400-AVE 110880		Adjustable delay setting t _r • 2 – 20 s at 6 x I _n and infinite (without overload release) – NZM...3-4-VE400(630): 2 – 14 s at 6 x I _n and infi- nite (without overload release)
		NZMH3-4-VE400/250-AVE 113592		
		NZMH3-4-VE630-AVE 110881		
		NZMH3-4-VE630/400-AVE 113594		Adjustable delay t _{sd} • Steps: 0, 20, 60, 100, 200, 300, 500, 750, 1000 ms
		Withdrawable units as accessories	1 off	i ² t constant function • NZM2 fixed OFF • NZM3, NZM4 switchable
— — — —		NZMN3-4-VE400-T-AVE 119902	1 off	
		NZMN3-4-VE630-T-AVE 119903		
		NZMH3-4-VE400-T-AVE 119900		
		NZMH3-4-VE630-T-AVE 119901		

1.3

Circuit-breakers, switch-disconnectors


Switch-disconnectors, 3 pole

PN..., N...

Rated current = Rated uninterrupted current $I_n = I_u$ A	Short-circuit protection, max. fuse gL-characteristic A gL	Fixed mounting with screw terminals Part no. Article no.	Price See price list	Fixed mounting with box terminals Part no. Article no.	Price See price list
---	---	--	-----------------------------------	--	-----------------------------------

Switch-disconnectors




2 switch positions I, 0



63	125	Screw terminals as accessories		PN1-63 259140	B
100	125			PN1-100 259141	B
125	125			PN1-125 259142	B
160	160			PN1-160 281235	B
160	250	PN2-160 266005	S	PN2-160-BT 110308	B
200	250	PN2-200 266006	S	PN2-200-BT 110309	B
250	250	PN2-250 266007	S	PN2-250-BT 110310	B
400	630	PN3-400 266017	S	PN3-400-BT 110314	B
630	630	PN3-630 266018	S	PN3-630-BT 110315	B

3 switch positions I, +, 0

Can be remotely operated with shunt release XU/XA, remote operator XR,
Can be equipped with trip-indicating auxiliary contact M22-K..



63	125	Screw terminals as accessories		N1-63 259143	B
100	125			N1-100 259144	B
125	125			N1-125 259145	B
160	160			N1-160 281236	B
160	250	N2-160 266008	S	N2-160-BT 110311	B
200	250	N2-200 266009	S	N2-200-BT 110312	B
250	250	N2-250 266010	S	N2-250-BT 110313	B
400	630	N3-400 266019	S	N3-400-BT 110316	B
630	630	N3-630 266020	S	N3-630-BT 110317	B
800	1600	N4-800 266025	S	Terminals as accessory	
1000	1600	N4-1000 266026	S		
1250	1600	N4-1250 266027	S		
1600	1600	N4-1600 266028	S		

Plug-in/withdrawable units


Part no. Article no.	Price See price list	Std. pack	Notes
-------------------------	-------------------------	-----------	-------

B = box terminals
S = screw terminals
 For further terminal types see accessories
 IEC/EN 60947-3


—	—	1 off	Main switch characteristics including positive operation to IEC/EN 60204, VDE 0113 Isolating characteristics to IEC/EN 60947-3, VDE 0660 Contact protection to VDE 0160 part 100
---	---	-------	--




N1-63-SVE 113729	1 off
N1-100-SVE 113730	
N1-125-SVE 113731	
—	



N2-160-SVE 113733
N2-200-SVE 113734
N2-250-SVE 113735



N3-400-AVE 110768
N3-630-AVE 110769



Withdrawable units as accessories

1.3

Circuit-breakers, switch-disconnectors

Switch-disconnectors, 4 pole

PN...-4, N...-4

1

Rated current = Rated uninterrupted current	Short-circuit protection, max. fuse gL-characteristic	Fixed mounting with screw terminals Part no. Article no.	Price See price list	Fixed mounting with box terminals Part no. Article no.	Price See price
---	---	---	--------------------------------	---	---------------------------



$I_n = I_u$

A

A gL

Switch-disconnectors




2 switch positions, 0



63	125	Screw terminals as accessories		PN1-4-63 265999	B
100	125			PN1-4-100 266000	B
125	125			PN1-4-125 266001	B
160	160			PN1-4-160 281253	B
160	250	PN2-4-160 266011	S	PN2-4-160-BT 118880	B
200	250	PN2-4-200 266012	S	PN2-4-200-BT 118881	B
250	250	PN2-4-250 266013	S	PN2-4-250-BT 118882	B
400	630	PN3-4-400 266021	S	PN3-4-400-BT 111653	B
630	630	PN3-4-630 266022	S	PN3-4-630-BT 111654	B



3 switch positions I, +, 0

Can be remotely operated with shunt release XU/XA, remote operator XR,
Can be equipped with trip-indicating auxiliary contact M22-K..



63	125	Screw terminals as accessories		N1-4-63 266002	B
100	125			N1-4-100 266003	B
125	125			N1-4-125 266004	B
160	160			N1-4-160 281254	B
160	250	N2-4-160 266014	S	N2-4-160-BT 118883	B
200	250	N2-4-200 266015	S	N2-4-200-BT 118884	B
250	250	N2-4-250 266016	S	N2-4-250-BT 118885	B
400	630	N3-4-400 266023	S	N3-4-400-BT 111651	B
630	630	N3-4-630 266024	S	N3-4-630-BT 111652	B
800	1600	N4-4-800 266029	S	Terminals as accessory	
1000	1600	N4-4-1000 266030	S		
1250	1600	N4-4-1250 266031	S		
1600	1600	N4-4-1600 266032	S		

Plug-in units

Part no.	Price	Std. pack	Notes
Article no.	See price list		
Order base separately			
B = box terminals S = screw terminals			
For further terminal types see accessories			
-		1 off	1IEC/EN 60947-3
-			Main switch characteristics including positive operation to IEC/EN 60204, VDE 0113 Isolating characteristics to IEC/EN 60947-3, VDE 0660 Contact protection to VDE 0160 part 100
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-		1 off	
-			
-			
-			
	N2-4-160-SVE	113736	
	N2-4-200-SVE	113737	
	N2-4-250-SVE	113738	
	N3-4-400-AVE	110872	
	N3-4-630-AVE	110873	
	Withdrawable units as accessories		

1.3 Circuit-breakers, switch-disconnectors

Technical overview for 1000 V


1 NZM...-S1, N...-S1



With main switch characteristics to IEC/EN 60204 and isolating characteristics to IEC/EN 60947, VDE 660

Circuit-breakers for 1000 V AC, 3 pole

Switch-disconnectors for 1000 V DC, 2 pole
Without overload and short-circuit release

Switching capacity		System and cable protection			Selectivity protection			Motor protection				
1000 V	kA/p.f.	I_{CU}	10/0.5	15/0.5	20/0.3	10/0.5	20/0.3	15/0.5	20/0.3			
		I_{CS}	3/0.5	10/0.5	15/0.3	3/0.5	15/0.3	10/0.5	15/0.3			
Rated uninterrupted current $I_u =$		I_u	I_u	I_u	I_u	I_u	I_u	I_u	I_u	I_u	I_u	
Rated current I_n												
Ambient air temperature at 100% I_u			A	A	A	A	A	A	A	A	A	
min./max. -25/+50 °C												
N... S1-DC max. +70 °C												
			NZMH2-	NZMH3-	NZMH4-	NZMH2-	NZMH4-	NZMH3-	NZMH4-	N2-...-S1-	N3-...-S1-	N4-...-S1-
			A...-S1	AE...-S1	AE...-S1	VE...-S1	VE...-S1	ME...-S1		DC	DC	DC
			20	250	630	100	630	220	550	160	320	800
			25	400	800	160	800	350	875	200	400	1000
			32	630	1000	250	1000	450	1400		500	1250
			40		1250		1250					1400
			50		1600		1600					
			63									
			80									
			100									
			125									
			160									
			200									
			250									
			300									
Rated short-time withstand current I_{cw} (0.1s current t_{ms})		kA								3	6	25



Switching capacity 1000 V 50/60 Hz I_{cu} kA	Rated current = Rated uninterrupted current $I_n = I_u$ A	Setting range Overload releases I_r A	Short-circuit releases		Fixed mounting Part no. Article no.	Price See price list	Std. pack
			Non-delayed $I_i = I_n \times \dots$	Delayed $I_{sd} = I_r \times \dots$			
							

Thermomagnetic releases



System and cable protection

10	20	15-20	350 A fixed	–	NZMH2-A20-S1 290355	S	1 off
	25	20-25	350 A fixed	–	NZMH2-A25-S1 290356	S	
	32	25-32	350 A fixed	–	NZMH2-A32-S1 290357	S	
	40	32-40	8-10	–	NZMH2-A40-S1 290358	S	
	50	40-50	6-10	–	NZMH2-A50-S1 290359	S	
	63	50-63	6-10	–	NZMH2-A63-S1 290360	S	
	80	63-80	6-10	–	NZMH2-A80-S1 290361	S	
	100	80-100	6-10	–	NZMH2-A100-S1 290362	S	
	125	100-125	6-10	–	NZMH2-A125-S1 290363	S	
	160	125-160	6-10	–	NZMH2-A160-S1 290364	S	
	200	160-200	6-10	–	NZMH2-A200-S1 290365	S	
	250	200-250	6-10	–	NZMH2-A250-S1 290366	S	
	300	240-300	6-10	–	NZMH2-A300-S1 107577	S	

Electronic releases

R.m.s. value measurement and "thermal memory"

15	250	125-250	2-11	–	NZMH3-AE250-S1 119361	S	1 off
	400	200-400	2-11	–	NZMH3-AE400-S1 119362	S	
	630	315-630	2-8	–	NZMH3-AE630-S1 119363	S	
20	630	315-630	2-12	–	NZMH4-AE630-S1 290370	S	
	800	400-800	2-12	–	NZMH4-AE800-S1 290371	S	
	1000	500-1000	2-12	–	NZMH4-AE1000-S1 290372	S	
	1250	630-1250	2-12	–	NZMH4-AE1250-S1 290373	S	
	1600	800-1600	2-12	–	NZMH4-AE1600-S1 290374	S	

Notes

B = box terminals

S = screw terminals

IEC/EN 60947-2

Terminal type:

NZM2: Cover NZM2-XKSA required

NZM3: Cover NZM3-XKSA required

NZM4: Isolated bar connection (screw terminal NZM4-XKS)

1.3

Circuit-breakers, switch-disconnectors

Circuit-breakers for 1000 V AC, 3 pole

1

Switching capacity 1000 V 50/60 Hz I_{cu} kA	Rated current = Rated uninterrupted current $I_n = I_u$ A	Setting range Overload releases I_r A	Short-circuit releases		Fixed mounting Part no. Article no.	Price See price list	Std. pack
			Non-delayed $I_i = I_n \times \dots$	Delayed $I_{sd} = I_r \times \dots$			





Systems protection, cable protection, selectivity, generator protection

IEC/EN 60947-2

R.m.s. value measurement and "thermal memory"

Adjustable delay setting t_d

- 2-20 s at $6 \times I_r$ and infinite (without overload release) Adjustable delay t_{sd}
- Steps: 0, 20, 60, 100, 200, 300, 500, 750, 1000 ms i^2t constant function
- NZM2 fixed OFF
- NZM3, NZM4 switchable



10	100	50-100	1200 A fixed	2-10	NZMH2-VE100-S1 100777	S	1 off
	160	80-160	1920 A fixed	2-10	NZMH2-VE160-S1 100778	S	
	250	125-250	3000 A fixed	2-10	NZMH2-VE250-S1 100779	S	
	400	200-400	2-11	2-10	NZMH3-VE400-S1 119367	S	
	630	315-630	2-8	1.5-7	NZMH3-VE630-S1 119368	S	
20	630	315-630	2-12	2-10	NZMH4-VE630-S1 290375	S	
	800	400-800	2-12	2-10	NZMH4-VE800-S1 290376	S	
	1000	500-1000	2-12	2-10	NZMH4-VE1000-S1 290377	S	
	1250	630-1250	2-12	2-10	NZMH4-VE1250-S1 290378	S	
	1600	800-1600	2-12	2-10	NZMH4-VE1600-S1 290379	S	
15	220	110-220	2-14	–	NZMH3-ME220-S1 119364	S	1 off
	350	175-350	2-14	–	NZMH3-ME350-S1 119365	S	
	450	225-450	2-12	–	NZMH3-ME450-S1 119366	S	
20	550	275-550	2-14	–	NZMH4-ME550-S1 290383	S	
	875	438-875	2-14	–	NZMH4-ME875-S1 290384	S	
	1400	700-1400	2-14	–	NZMH4-ME1400-S1 290385	S	

Notes

B = box terminals

S = screw terminals


Terminal type:

NZM2: Cover NZM2-XKSA required




NZM3: Cover NZM3-XKSA required

NZM4: Isolated bus connection (screw terminal NZM4-XKS)

N...DC

Rated current = Rated uninterrupted current $I_n = I_u$ A	Short-circuit protection, max. fuse gR- characteristic A g ^R	Fixed mounting Part no. Article no.	Price See price list	Std. pack	Notes
160	200	N2-4-160-S1-DC 127732		1 off	<p>B = box terminals S = screw terminals</p> <p>Main switch characteristics including positive operation to IEC/EN 60204, VDE 0113. Isolating characteristics to IEC/EN 60947, VDE 0660. Protection against electric shock to VDE 0160 part 100. Switch-disconnectors N can, in addition, be combined with shunt releases NZM...-XU, NZM...-XA and auxiliary contacts as well as with remote operator NZM...-XR...</p> <p>Connection types: For 2 pole switching, series connection of two poles each is required. See jumper kits under accessories</p>  <p>Terminals as accessory Switch can not be combined with plug-in/withdrawable</p>
200	200	N2-4-200-S1-DC 127733		S	
320	500	N3-4-320-S1-DC 127734		S	
400	500	N3-4-400-S1-DC 142267		S	
500	500	N3-4-500-S1-DC 142268		S	
800	1600	N4-4-800-S1-DC 119890		S	
1000	1600	N4-4-1000-S1-DC 119891		S	
1250	1600	N4-4-1250-S1-DC 119886		S	
1400	1400	N4-4-1400-S1-DC 119887		S	

Switch-disconnectors for 1000 V DC



Rated operational current I_n A	For use with	Number of poles	Degree of protection	Part no. Article no.	Price See price list	Std. pack
---	--------------	-----------------	----------------------	--------------------------------	-------------------------	-----------








Jumper kits

Model contains parts for upper switch side for 4 pole switches, N...-S1-DC that are used as 2 pole switches for DC

The jumpers each connect two current paths in series. Incomer and outgoing at bottom or top, freely selectable.

≥ 1250 A: For 65 °C ambient air temperature connection at bottom through module plates NZM4-4-XKM2S-1600.

Jumper kit with cover	200 at 65 °C 160 at 70 °C	N2-4-...S1-DC	4 pole/ 2 pole	IP2X	NZM2-4-XKV2P 131730	1 off
Terminal jumpers with cover	400 at 70 °C	N3-320(400)-S1-DC	4 pole/ 2 pole	IP2X	NZM3-4-XKV2P 131731	
Jumper kit with insulating plates	500 at 50 °C 400 at 70 °C	N3-400(500)-S1-DC	4 pole/ 2 pole	IP00	NZM3-4-XKV2P 142269	
Jumper kit with cover and heat sink	400 at 70 °C 500 at 55 °C 500 at 40 °C	N3-400(500)-S1-DC N3-500-S1-DC	4 pole/ 2 pole	IP1X IP2X	NZM3-4-XKV2P-K 142271	
Jumper kit with insulating plates and heat sinks	500 at 65 °C		4 pole/ 2 pole	IP00	NZM3-4-XKVI2P-K 142270	
Jumper kit with cover	1400 at 40 °C 1250 at 65 °C	N4-4-...S1-DC	4 pole/ 2 pole	IP2X	NZM4-4-XKV2P 119888	
Jumper kit with heat sink	1400 at 65 °C	N4-4-1400-S1-DC	4 pole/ 2 pole	IP00	NZM4-4-XKV2P- 1400 119905	




1.3 Circuit-breakers, switch-disconnectors

Switch-disconnectors, ATEX


1 PN...ATEX

Number of conductors	Rated current = Rated uninterrupted current $I^n = I^u$ A	Short-circuit protection, max. fuse gL-characteristic A gL	Fixed mounting	Price See price list	Std. pack
			Part no. Article no.		
Switch-disconnectors for ATEX type					
3 pole	125	125	PN1-125/HIV/DA-SVD-SW/ATEX22 119386		1 off
	160	160	PN1-160/HIV/DA-SVD-SW/ATEX22 119387		
	200	250	PN2-200/HIV/DA-SVD-SW/ATEX22 119388		
	240	250	PN2-250/HIV/DA-SVD-SW/ATEX22 119389		
	400	630	PN3-400/HIV/DA-SVD-SW/ATEX22 119410		
	630	630	PN3-630/HIV/DA-SVD-SW/ATEX22 119411		
6 pole	160	160	2PN1-160/HIV/DA-SVD-SW/ATEX22 119418		
6 pole	250	250	2PN2-250/HIV/DA-SVD-SW/ATEX22 119419		
3 pole	125	125	PN1-125/HIV/DA-SVD-SW/EMV/ATEX22 119412		
	160	160	PN1-160/HIV/DA-SVD-SW/EMV/ATEX22 119413		
	200	250	PN2-200/HIV/DA-SVD-SW/EMV/ATEX22 119414		
	240	250	PN2-250/HIV/DA-SVD-SW/EMV/ATEX22 119415		
	400	630	PN3-400/HIV/DA-SVD-SW/EMV/ATEX22 119416		
	630	630	PN3-630/HIV/DA-SVD-SW/EMV/ATEX22 119417		

2 switch positions I, 0



ATEX switches for EMC type



Notes

Main switch characteristics including positive operation to IEC/EN 60204, VDE 0113.
 Isolating characteristics to IEC/EN 60947-3, VDE 0660.
 Protection against electric shock to VDE 0160 part 100.

ATEX = Atmosphères explosibles = explosive atmospheres
 Eaton supplies switch-disconnectors PN1, PN2 and PN3 for a current range of up to 630 A as complete device according to ATEX Directive 94/9 EG (binding as of 06/2003).
 The switches are approved for device group II, the application "everything, except for mining" and for category 3 (normal safety).
 Switch-disconnectors in surface mounting enclosure with ATEX approval are used in potentially explosive dust-laden areas, such as mills, metal grinding works, wood processing operations, cement works, the aluminum industry, the foodstuffs industry, grain storage and processing plants, agriculture, and in the pharmaceuticals industry.

ATEX switches for EMC are suitable for use with screened cables.
 For important general flush mounting and application notes, see the included installation instructions AWA1230-2480, which you can also download from our homepage www.moeller.net.

1.4

Circuit-breakers, switch-disconnectors

Circuit-breakers, switch-disconnectors for North America, 3 pole


1 NZM1, NZM2, NZM3, NZM4

Circuit-breakers

UL/CSA approved to UL 489, CSA-C22.2 No. 5-09 as well as IEC/EN 60947

With main switch characteristics to IEC/EN 60204 and isolating characteristics to IEC/EN 60947, VDE 0660

Rated uninterrupted current I_u = Rated current I_n
Adjustable overload releases I_r
Adjustable short-circuit releases I_s
Delayed short-circuit releases I_{sd}



Thermomagnetic releases

Overload release

Fixed

I_u

A

NZM1
15-125

Adjustable

I_u

A

NZM1
20-125

I_r
A

NZM2
20-250
0.8-1 x I_n

None

I_u

A



NZM1
1.2-100

NZM2
1.6-250

Basic switching capacity ¹⁾			NZMB2-...-NA		NZMB2-...-NA		
NEMA Test Procedure	240 V 60 Hz	sym. rms kA	35		35		
SCCR	480 V 60 Hz	sym. rms kA	25 ²⁾		25		
	600 V 60 Hz	sym. rms kA	—		18 ⁴⁾		
IEC/EN 60947	400/415 V	kA/p.f.	25	0.25	25	0.25	
	440 V	kA/p.t	25	0.25	25	0.25	
Normal switching capacity ¹⁾			NZMN1-...-NA		NZMN2-...-NA		
NEMA Test Procedure	240 V 60 Hz	sym. rms kA	85		85		
SCCR	480 V 60 Hz	sym. rms kA	35 ²⁾		35		
	600 V 60 Hz	sym. rms kA	—		25 ⁴⁾		
IEC/EN 60947	400/415 V	kA/p.f.	50	0.25	50	0.25	
	440 V	kA/p.f.	35	0.25	35	0.25	
	525 V	kA/p.f.	20	0.30	25	0.25	
	690 V	kA/p.f.	10	0.50	20	0.30	
High switching capacity ¹⁾			NZMH2-... NA				
NEMA Test Procedure	240 V 60 Hz	sym. rms kA	150				
SCCR	480 V 60 Hz	sym. rms kA	100				
	600 V 60 Hz	sym. rms kA	65 ³⁾⁴⁾				
IEC/EN 60947	400/415 V	kA/p.f.	150				0.20
	440 V	kA/p.f.	130				0.20
	525 V	kA/p.f.	50				0.25
	690 V	kA/p.f.	20				0.30

Notes

- 1) Switches correspond with both UL/CSA and IEC regulations
IEC switching performance values shown on type label. → Technical data
- 2) For NZM...1-...-NA 480Y/277V
- 3) For NZMH2>125 A: 50 kA
- 4) For NZM...2: 600Y/347 V



Electronic releases
Overload release

Short-circuit releases

Motor protection

I_u A	I_u A	I_r A	I_u A	I_u A	I_u A	I_r A	I_u A	I_u A	I_u A	I_r A	I_{sd} A	I_i A	I_i A
150-250	100-250	0.5-1x I_n	90-220	250-600	250-600	0.5-1x I_n	220-450	600-	800-	0.5-1x I_n	2-10x I_n	2-12x I_n	2-14x I_n
								1200	1200				

NZMN2-...E...-NA		NZMN3-...E...-NA		NZMN4-...E...-NA	
85		85		85	
35		42		42	
25 ⁴⁾		35		35	
50	0.25	50	0.25	50	0.25
35	0.25	35	0.25	35	0.25
25	0.25	25	0.25	25	0.25
20	0.30	20	0.30	20	0.30
NZMH2-...E...-NA		NZMH3-...E...-NA		NZMH4-...E...-NA	
150		150		125	
100		100		85	
50 ⁴⁾		50		50	
150	0.20	150	0.20	85	0.20
130	0.20	130	0.20	85	0.20
50	0.25	65	0.25	65	0.25
20	0.30	35	0.25	50	0.25

The approved switches are suitable for world-wide use. The UL and CSA certificates can be found at www.ul.com and www.csa.com

UL certificates: File No.:E 31593(NZM1-4), E 148671 (NIS11-4)

CSA certificates: File No.165628(NZM1-4)

Molded case switch

UL/CSA approved to UL 489, CSA 22.2 No. 5-09
as well as IEC/EN 60947-2 Annex L


With main switch characteristics to IEC/EN 60204, VDE 0113

Isolating characteristics to IEC/EN 60947

Without overcurrent protection

With short-circuit release

Rated uninterrupted current $I_u = I_n$

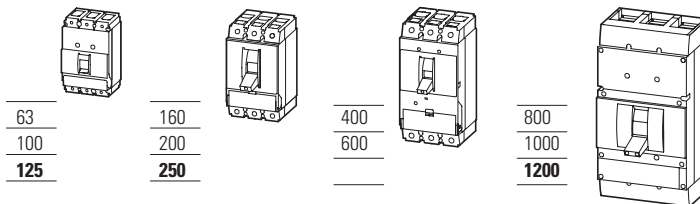

Switching capacity		NS1-...-NA	NS1-...-NA	NS1-...-NA	NS1-...-NA
according to UL 489, CSA 22.2	240 V	85	150	150	85
SCCR	480 V	35 ¹⁾	100	100	65
	600 V	-	50 ⁴⁾	50	42
IEC/EN 60947	400/415 V	50	150	150	70
	440 V	35	130	130	65
	525 V	20	50	65	40
	690	10	20	35	35

Notes

¹⁾ For NS1-...-NA: 480Y/277V

⁴⁾ For NZM...2: 600Y/347 V

1.5

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, thermomagnetic releases, 3 pole

NZM...AF...NA

Switching capacity			
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA

Rated current =
Rated
uninterrupted
current
 $I_n = I_u$
kA

Setting range
Overload
releases
Fixed
 I_r
A

Short-circuit
releases
Non-delayed
 $I_i = I_n \times \dots$
A



Fixed mounting

Part no.
Article no.

Price
See price
list


System and cable protection

Fixed overload releases I_r

Basic switching capacity



25	—	—	—	20	20	350 A fixed	Screw terminals as accessories	—
				25	25	350 A fixed		—
				30	30	350 A fixed		—
				35	35	Approx. 8-10		—
				40	40	Approx. 8-10		—
				45	45	Approx. 6-10		—
				50	50	Approx. 6-10		—
				60	60	Approx. 6-10		—
				70	70	Approx. 6-10		—
				80	80	Approx. 6-10		—
				90	90	Approx. 6-10		—
				100	100	Approx. 6-10		—
				110	110	Approx. 6-10		—
				125	125	Approx. 6-10		—
25	25	18	—	15	15	350 A fixed	NZMB2-AF15-NA 269142	S
				20	20	350 A fixed	NZMB2-AF20-NA 269143	S
				25	25	350 A fixed	NZMB2-AF25-NA 269144	S
				30	30	350 A fixed	NZMB2-AF30-NA 269145	S
				35	35	Approx. 8-10	NZMB2-AF35-NA 269146	S
				40	40	Approx. 8-10	NZMB2-AF40-NA 269147	S
				45	45	Approx. 6-10	NZMB2-AF45-NA 269148	S
				50	50	Approx. 6-10	NZMB2-AF50-NA 269149	S
				60	60	Approx. 6-10	NZMB2-AF60-NA 269160	S
				70	70	Approx. 6-10	NZMB2-AF70-NA 269161	S
				80	80	Approx. 6-10	NZMB2-AF80-NA 269162	S
				90	90	Approx. 6-10	NZMB2-AF90-NA 269163	S
				100	100	Approx. 6-10	NZMB2-AF100-NA 269164	S
				110	110	Approx. 6-10	NZMB2-AF110-NA 269165	S
				125	125	Approx. 6-10	NZMB2-AF125-NA 269166	S
				150	150	Approx. 6-10	NZMB2-AF150-NA 269167	S



Fixed mounting

with box terminals

Part no.

Article no.

Price

See price list

Std. pack

Information relevant for export to North America



Notes

Part no.	Price	Std. pack	Information relevant for export to North America	Notes	
NZMB1-AF20-NA 281554	B	1 off 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593 DIVA Q22086 1432-01 UL Listed, CSA certified Yes	Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.
NZMB1-AF25-NA 281555	B		Suitable for Current Limiting CB	Feeder circuits, branch circuits Yes	
NZMB1-AF30-NA 281556	B		Max. Voltage Rating Degree of Protection	480Y/277 V IEC: IP20; UL/CSA Type:-	
NZMB1-AF35-NA 272204	B				
NZMB1-AF40-NA 272205	B				
NZMB1-AF45-NA 272206	B				
NZMB1-AF50-NA 272207	B				
NZMB1-AF60-NA 272208	B				
NZMB1-AF70-NA 272209	B				
NZMB1-AF80-NA 272250	B				
NZMB1-AF90-NA 272251	B				
NZMB1-AF100-NA 272252	B				
NZMB1-AF110-NA 281557	B				
NZMB1-AF125-NA 281558	B				
NZMB2-AF15-BT-NA 107611	B	1 off 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593 DIVA Q22086 1432-01 UL Listed, CSA certified Yes	
NZMB2-AF20-BT-NA 107612	B		Suitable for Current Limiting CB	Feeder circuits, branch circuits Yes	
NZMB2-AF25-BT-NA 107613	B		Max. Voltage Rating Degree of Protection	600Y/347 V, 480 V IEC: IP20; UL/CSA Type:-	
NZMB2-AF30-BT-NA 107614	B				
NZMB2-AF35-BT-NA 107615	B				
NZMB2-AF40-BT-NA 107616	B				
NZMB2-AF45-BT-NA 107617	B				
NZMB2-AF50-BT-NA 107618	B				
NZMB2-AF60-BT-NA 107619	B				
NZMB2-AF70-BT-NA 107620	B				
NZMB2-AF80-BT-NA 107621	B				
NZMB2-AF90-BT-NA 107622	B				
NZMB2-AF100-BT-NA 107623	B				
NZMB2-AF110-BT-NA 107624	B				
NZMB2-AF125-BT-NA 107625	B				
NZMB2-AF150-BT-NA 107626	B				

1.5

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, thermomagnetic releases, 3 pole

NZM...AF...NA

Fixed mounting

Switching capacity			
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA

Rated current = Rated uninterrupted current $I_n = I_u$ kA


Setting range	
Overload releases Fixed I_r A	Short-circuit releases Non-delayed $I_i = I_n \times \dots$ A

Part no. Article no.	Price See price list

System and cable protection

Fixed overload releases I_r

Basic switching capacity







Normal switching capacity



25	25	18	—	175	175	Approx. 6-10	NZMB2-AF175-NA 269168	S
				200	200	Approx. 6-10	NZMB2-AF200-NA 269169	S
				225	225	Approx. 6-10	NZMB2-AF225-NA 271089	S
				250	250	Approx. 6-10	NZMB2-AF250-NA 271100	S
35	—	—	—	20	20	350 A fixed	Screw terminals as accessories	S
				25	25	350 A fixed		S
				30	30	350 A fixed		S
				35	35	Approx. 8-10		S
				40	40	Approx. 8-10		S
				45	45	Approx. 6-10		S
				50	50	Approx. 6-10		S
				60	60	Approx. 6-10		S
				70	70	Approx. 6-10		S
				80	80	Approx. 6-10		S
				90	90	Approx. 6-10		S
				100	100	Approx. 6-10		S
				110	110	Approx. 6-10		S
				125	125	Approx. 6-10		S
35	35	25	—	15	15	350 A fixed	NZMN2-AF15-NA 269170	S
				20	20	350 A fixed	NZMN2-AF20-NA 269171	S
				25	25	350 A fixed	NZMN2-AF25-NA 269172	S
				30	30	350 A fixed	NZMN2-AF30-NA 269173	S
				35	35	Approx. 8-10	NZMN2-AF35-NA 269174	S
				40	40	Approx. 8-10	NZMN2-AF40-NA 269175	S
				45	45	Approx. 6-10	NZMN2-AF45-NA 269176	S
				50	50	Approx. 6-10	NZMN2-AF50-NA 269177	S
				60	60	Approx. 6-10	NZMN2-AF60-NA 269178	S
				70	70	Approx. 6-10	NZMN2-AF70-NA 269179	S

Fixed mounting

with box terminals

Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America 	Notes
B=box terminals S=screw terminals				
NZMB2-AF175-BT-NA 107627	B	1 off 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Current Limiting CB Max. Voltage Rating Degree of Protection	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593 DIVA 022086 1432-01 UL Listed, CSA certified Yes Feeder circuits, branch circuits Yes 600Y/347 V, 480 V IEC: IP20; UL/CSA Tvoe:-
NZMB2-AF200-BT-NA 107628	B			Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.
NZMB2-AF225-BT-NA 107629	B			
NZMB2-AF250-BT-NA 107630	B			
NZMN1-AF20-NA 281565	B	1 off 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Current Limiting CB Max. Voltage Rating Degree of Protection	
NZMN1-AF25-NA 281566	B			
NZMN1-AF30-NA 281567	B			
NZMN1-AF35-NA 274220	B			
NZMN1-AF40-NA 274223	B			
NZMN1-AF45-NA 274230	B			
NZMN1-AF50-NA 274231	B			
NZMN1-AF60-NA 274232	B			
NZMN1-AF70-NA 274233	B			
NZMN1-AF80-NA 274234	B			
NZMN1-AF90-NA 274235	B			
NZMN1-AF100-NA 274236	B			
NZMN1-AF110-NA 281568	B			
NZMN1-AF125-NA 281569	B			
NZMN2-AF15-BT-NA 107631	B	1 off 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Current Limiting CB Max. Voltage Rating Degree of Protection	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593 DIVA 022086 1432-01 UL Listed, CSA certified Yes Feeder circuits, branch circuits Yes 600Y/347 V, 480 V IEC: IP20; UL/CSA Type:-
NZMN2-AF20-BT-NA 107632	B			
NZMN2-AF25-BT-NA 107633	B			
NZMN2-AF30-BT-NA 107634	B			
NZMN2-AF35-BT-NA 107635	B			
NZMN2-AF40-BT-NA 107636	B			
NZMN2-AF45-BT-NA 107637	B			
NZMN2-AF50-BT-NA 107638	B			
NZMN2-AF60-BT-NA 107639	B			
NZMN2-AF70-BT-NA 107640	B			

1.5

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, thermomagnetic releases, 3 pole

NZM...AF...NA

Switching capacity			
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA

Rated current =
Rated
uninterrupted
current
 $I_n = I_u$
kA

Setting range

Overload
releases

Fixed
 I_r
A

Short-circuit
releases

Non-delayed
 $I_i = I_n \times \dots$
A



Fixed mounting


Part no.
Article no.

Price
See price
list

System and cable protection

Fixed overload releases I_r

Basic switching capacity



35	35	25	—	80	80	Approx. 6-10	NZMN2-AF80-NA 269180	S
					90	Approx. 6-10	NZMN2-AF90-NA 269181	S
					100	Approx. 6-10	NZMN2-AF100-NA 269182	S
					110	Approx. 6-10	NZMN2-AF110-NA 269183	S
					125	Approx. 6-10	NZMN2-AF125-NA 269184	S
					150	Approx. 6-10	NZMN2-AF150-NA 269185	S
					175	Approx. 6-10	NZMN2-AF175-NA 269186	S
					200	Approx. 6-10	NZMN2-AF200-NA 269187	S
					225	Approx. 6-10	NZMN2-AF225-NA 271101	S
					250	Approx. 6-10	NZMN2-AF250-NA 271102	S

High switching capacity



25	25	18	—	15	15	350 A fixed	NZMH2-AF15-NA 269188	S
					20	350 A fixed	NZMH2-AF20-NA 269189	S
					25	350 A fixed	NZMH2-AF25-NA 269190	S
					30	350 A fixed	NZMH2-AF30-NA 269191	S
					35	Approx. 8-10	NZMH2-AF35-NA 269192	S
					40	Approx. 8-10	NZMH2-AF40-NA 269193	S
					45	Approx. 6-10	NZMH2-AF45-NA 269194	S
					50	Approx. 6-10	NZMH2-AF50-NA 269195	S
					60	Approx. 6-10	NZMH2-AF60-NA 269196	S
					70	Approx. 6-10	NZMH2-AF70-NA 269197	S
					80	Approx. 6-10	NZMH2-AF80-NA 269198	S
					90	Approx. 6-10	NZMH2-AF90-NA 269199	S
					100	Approx. 6-10	NZMH2-AF100-NA 269200	S
					110	Approx. 6-10	NZMH2-AF110-NA 269201	S
					125	Approx. 6-10	NZMH2-AF125-NA 269202	S
100	100	50	—	150	150	Approx. 6-10	NZMH2-AF150-NA 269203	S
					175	Approx. 6-10	NZMH2-AF175-NA 269204	S
					200	Approx. 6-10	NZMH2-AF200-NA 269205	S
					225	Approx. 6-10	NZMH2-AF225-NA 271103	S
					250	Approx. 6-10	NZMH2-AF250-NA 271104	S

Fixed mounting

with box terminals

Part no.

Article no.

Price

See price list

Std. pack

Information relevant for export to North America



Notes

Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America	Notes
NZMN2-AF80-BT-NA 107641	B	1 off 	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.
NZMN2-AF90-BT-NA 107642	B		UL File No. E31593	
NZMN2-AF100-BT-NA 107643	B		UL CCN DIVA	
NZMN2-AF110-BT-NA 107644	B		CSA File No. 022086	
NZMN2-AF125-BT-NA 107645	B		CSA Class No. 1432-01	
NZMN2-AF150-BT-NA 107646	B		NA Certification UL Listed, CSA certified	
NZMN2-AF175-BT-NA 107647	B		Specially designed for NA Yes	
NZMN2-AF200-BT-NA 107648	B		Suitable for Feeder circuits, branch circuits	
NZMN2-AF225-BT-NA 107649	B		Current Limiting CB Yes	
NZMN2-AF250-BT-NA 107650	B		Max. Voltage Rating 600Y/347 V, 480 V	
NZMH2-AF15-BT-NA 107809	B	1 off 	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	
NZMH2-AF20-BT-NA 107810	B		UL File No. E31593	
NZMH2-AF25-BT-NA 107811	B		UL CCN DIVA	
NZMH2-AF30-BT-NA 107812	B		CSA File No. 022086	
NZMH2-AF35-BT-NA 107813	B		CSA Class No. 1432-01	
NZMH2-AF40-BT-NA 107814	B		NA Certification UL Listed, CSA certified	
NZMH2-AF45-BT-NA 107815	B		Specially designed for NA Yes	
NZMH2-AF50-BT-NA 107816	B		Suitable for Feeder circuits, branch circuits	
NZMH2-AF60-BT-NA 107817	B		Current Limiting CB Yes	
NZMH2-AF70-BT-NA 107818	B		Max. Voltage Rating 600Y/347 V, 480 V	
NZMH2-AF80-BT-NA 107819	B		Degree of Protection IEC: IP20; UL/CSA Type:-	
NZMH2-AF90-BT-NA 107820	B			
NZMH2-AF100-BT-NA 107821	B			
NZMH2-AF110-BT-NA 107822	B			
NZMH2-AF125-BT-NA 107823	B			
NZMH2-AF150-BT-NA 107824	B			
NZMH2-AF175-BT-NA 107825	B			
NZMH2-AF200-BT-NA 107826	B			
NZMH2-AF225-BT-NA 107827	B			
NZMH2-AF250-BT-NA 107828	B			

1.5

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, thermomagnetic releases, 3 pole



1

NZM...A...NA

Switching capacity			
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA

Rated current =
Rated
uninterrupted
current
 $I_n = I_u$
kA

Setting range

Overload releases	Short-circuit releases
Fixed I_r A	Non-delayed $I_i = I_n \times \dots$ A
	

Fixed mounting

Part no.
Article no.

Price
See price
list

System and cable protection

Fixed overload releases I_r

Basic switching capacity



Basic switching capacity	SCCR 480Y/277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/347 V 60 Hz	SCCR 600 V 60 Hz	Rated current = Rated uninterrupted current $I_n = I_u$ kA	Setting range	Short-circuit releases	Part no. Article no.	Price		
35	35	25	-	20	15-20	350 A fixed	Screw terminals as accessories	S			
								25	20-25	350 A fixed	S
								32	25-32	350 A fixed	S
								40	32-40	8-10	S
								50	40-50	6-10	S
								63	50-63	6-10	S
								80	63-80	6-10	S
								100	80-100	6-10	S
125	100-125	6-10	S								

Basic switching capacity



25	25	18	-	20	15-20	350 A fixe	Screw terminals as accessories	NZMB2-A20-NA 269206	S
								NZMB2-A25-NA 269207	S
								NZMB2-A32-NA 269208	S
								NZMB2-A40-NA 269209	S
								NZMB2-A50-NA 269210	S
								NZMB2-A63-NA 269211	S
								NZMB2-A80-NA 269212	S
								NZMB2-A100-NA 269213	S
								NZMB2-A125-NA 269214	S
								NZMB2-A160-NA 269215	S
NZMB2-A200-NA 269216	S								
NZMB2-A250-NA 271105	S								




Basic switching capacity



35	-	-	-	20	15-20	350 A fixed	Screw terminals as accessories	_____			
								25	20-25	350 A fixed	_____
								32	25-32	350 A fixed	_____
								40	32-40	8-10	_____
								50	40-50	6-10	_____
								63	50-63	6-10	_____

Fixed mounting

with box terminals

Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America		Notes
NZMB1-A20-NA 281559	B	1 off 	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.
NZMB1-A25-NA 281560	B		UL File No.	E31593	
NZMB1-A32-NA 281561	B		UL CCN	DIVA	
NZMB1-A40-NA 272253	B		CSA File No.	022086	
NZMB1-A50-NA 272254	B		CSA Class No.	1432-01	
NZMB1-A63-NA 272255	B		NA Certification	UL Listed, CSA certified	
NZMB1-A80-NA 272256	B		Specially designed for NA	Yes	
NZMB1-A100-NA 272258	B		Suitable for	Feeder circuits, branch circuits	
NZMB1-A125-NA 281562	B		Current Limiting CB	Yes	
NZMB2-A20-BT-NA 107773	B	1 off 	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	
NZMB2-A25-BT-NA 107774	B		UL File No.	E31593	
NZMB2-A32-BT-NA 107775	B		UL CCN	DIVA	
NZMB2-A40-BT-NA 107776	B		CSA File No.	022086	
NZMB2-A50-BT-NA 107777	B		CSA Class No.	1432-01	
NZMB2-A63-BT-NA 107778	B		NA Certification	UL Listed, CSA certified	
NZMB2-A80-BT-NA 107779	B		Specially designed for NA	Yes	
NZMB2-A100-BT-NA 107780	B		Suitable for	Feeder circuits, branch circuits	
NZMB2-A125-BT-NA 107781	B		Current Limiting CB	Yes	
NZMB2-A160-BT-NA 107782	B		Max. Voltage Rating	600Y/347 V, 480 V	
NZMB2-A200-BT-NA 107783	B		Degree of Protection	IEC: IP20; UL/CSA Type:-	
NZMB2-A250-BT-NA 107784	B				
NZMN1-A20-NA 281570	B	1 off 	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	
NZMN1-A25-NA 281571	B		UL File No.	E31593	
NZMN1-A32-NA 281572	B		UL CCN	DIVA	
NZMN1-A40-NA 274237	B		CSA File No.	022086	
NZMN1-A50-NA 274239	B		CSA Class No.	1432-01	
NZMN1-A63-NA 274240	B		NA Certification	UL Listed, CSA certified	
			Specially designed for NA	Yes	
			Suitable for	Feeder circuits, branch circuits	
			Current Limiting CB	Yes	
			Max. Voltage Rating	600Y/347 V, 480 V	
			Degree of Protection	IEC: IP20; UL/CSA Type:-	

1.5

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, thermomagnetic releases, 3 pole

1

NZM...A...NA

Switching capacity			
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA

Rated current =
Rated
uninterrupted
current
 $I_n = I_u$
kA

Setting range

Overload
releases

Fixed
 I_r
A



Short-circuit
releases

Non-delayed
 $I_i = I_n \times \dots$
A



Fixed mounting

Part no.
Article no.

Price
See price
list

System and cable protection

Fixed overload releases I_r

Basic switching
capacity



Basic switching capacity	SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz	Rated current = Rated uninterrupted current $I_n = I_u$ kA	Setting range Overload releases Fixed I_r A	Short-circuit releases Non-delayed $I_i = I_n \times \dots$ A	Fixed mounting Part no. Article no.	Price See price list
35	–	–	–	–	80	63-80	6-10	Screw terminals as accessories	
					100	80-100	6-10		
					125	100-125	6-10		
35	35	25	–	–	20	15-20	350 A fixed	NZMN2-A20-NA 269217	S
					25	20-25	350 A fixed	NZMN2-A25-NA 269218	S
					32	25-32	350 A fixed	NZMN2-A32-NA 269219	S
					40	32-40	8-10	NZMN2-A40-NA 269220	S
					50	40-50	6-10	NZMN2-A50-NA 269221	S
					63	50-63	6-10	NZMN2-A63-NA 269222	S
					80	63-80	6-10	NZMN2-A80-NA 269223	S
					100	80-100	6-10	NZMN2-A100-NA 269224	S
					125	100-125	6-10	NZMN2-A125-NA 269225	S
					160	125-160	6-10	NZMN2-A160-NA 269226	S
					200	160-200	6-10	NZMN2-A200-NA 269227	S
					250	200-250	6-10	NZMN2-A250-NA 271106	S



High switching
capacity



150	150	65	–	–	20	15-20	350 A fixed	NZMH2-A20-NA 269228	S
					25	20-25	350 A fixed	NZMH2-A25-NA 269229	S
					32	25-32	350 A fixed	NZMH2-A32-NA 269230	S
					40	32-40	8-10	NZMH2-A40-NA 269231	S
					50	40-50	6-10	NZMH2-A50-NA 269232	S
					63	50-63	6-10	NZMH2-A63-NA 269233	S
					80	63-80	6-10	NZMH2-A80-NA 269234	S
					100	80-100	6-10	NZMH2-A100-NA 269235	S
					125	100-125	6-10	NZMH2-A125-NA 269236	S
					160	125-160	6-10	NZMH2-A160-NA 269237	S
					200	160-200	6-10	NZMH2-A200-NA 269238	S
					250	200-250	6-10	NZMH2-A250-NA 271107	S

Fixed mounting

with box terminals

Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America 	Notes
B=boxterminals				
S=screw terminals				
NZMN1-A80-NA 274241	B	1 off 	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking Max. Voltage Rating 480Y/277 V Other Standards as NZMN2... below	Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.
NZMN1-A100-NA 274242	B			
NZMN1-A125-NA 281573	B			
NZMN2-A20-BT-NA 107785	B		Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking UL File No. E31593 UL CCN DIVA CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA Certified Specially designed for NA Yes Suitablefor Feeder circuits, Branch Circuits Current Limiting CB Yes Max. Voltage Rating 600Y/347 V,480 V Degree of Protection IEC: IP20; UL/CSA Type:-	
NZMN2-A25-BT-NA 107786	B			
NZMN2-A32-BT-NA 107787	B			
NZMN2-A40-BT-NA 107788	B			
NZMN2-A50-BT-NA 107789	B			
NZMN2-A63-BT-NA 107790	B			
NZMN2-A80-BT-NA 107791	B			
NZMN2-A100-BT-NA 107792	B			
NZMN2-A125-BT-NA 107793	B			
NZMN2-A160-BT-NA 107794	B			
NZMN2-A200-BT-NA 107795	B			
NZMN2-A250-BT-NA 107796	B			
NZMH2-A20-BT-NA 107797	B			
NZMH2-A25-BT-NA 107798	B			
NZMH2-A32-BT-NA 107799	B			
NZMH2-A40-BT-NA 107800	B			
NZMH2-A50-BT-NA 107801	B			
NZMH2-A63-BT-NA 107802	B			
NZMH2-A80-BT-NA 107803	B			
NZMH2-A100-BT-NA 107804	B			
NZMH2-A125-BT-NA 107805	B			
NZMH2-A160-BT-NA 107806	B			
NZMH2-A200-BT-NA 107807	B			
NZMH2-A250-BT-NA 107808	B			

1.5

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, electronic releases, 3 pole

1

NZM...AF...NA

Switching capacity				Rated current = Rated uninterrupted current	Setting range	
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non- delayed
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_i = I_n \times \dots$

Fixed mounting

Part no.

Article no.

Price

See price
list

Std. pack




System and cable protection


Fixed overload release I_r

R.m.s. value measurement and "thermal memory"

Normal switching capacity




42	42	35	35	250	250	2-11	NZMN3-AEF250-NA 269275	S	1 off
				300	300	2-11	NZMN3-AEF300-NA 269276	S	
				350	350	2-11	NZMN3-AEF350-NA 269277	S	
				400	400	2-11	NZMN3-AEF400-NA 269278	S	
				450	450	2-8	NZMN3-AEF450-NA 269279	S	
				500	500	2-8	NZMN3-AEF500-NA 269280	S	
				550	550	2-8	NZMN3-AEF550-NA 269281	S	
				600	600	2-8	NZMN3-AEF600-NA 269282	S	




42	42	35	35	600	600	2-12	NZMN4-AEF600-NA 271108	S	
				700	700	2-12	NZMN4-AEF700-NA 271109	S	
				800	800	2-12	NZMN4-AEF800-NA 271110	S	
				900	900	2-12	NZMN4-AEF900-NA 271111	S	
				1000	1000	2-12	NZMN4-AEF1000-NA 271112	S	
				1200	1200	2-12	NZMN4-AEF1200-NA 271113	S	

High switching capacity



100	100	50	50	250	250	2-11	NZMH3-AEF250-NA 269283	S	1 off
				300	300	2-11	NZMH3-AEF300-NA 269284	S	
				350	350	2-11	NZMH3-AEF350-NA 269285	S	
				400	400	2-11	NZMH3-AEF400-NA 269286	S	
				450	450	2-8	NZMH3-AEF450-NA 269287	S	
				500	500	2-8	NZMH3-AEF500-NA 269288	S	
				550	550	2-8	NZMH3-AEF550-NA 269289	S	



85	85	50	50	600	600	2-8	NZMH3-AEF600-NA 269290	S	
				600	600	2-12	NZMH4-AEF600-NA 271114	S	
				700	700	2-12	NZMH4-AEF700-NA 271115	S	
				800	800	2-12	NZMH4-AEF800-NA 271116	S	
				900	900	2-12	NZMH4-AEF900-NA 271117	S	
				1000	1000	2-12	NZMH4-AEF1000-NA 271118	S	
				1200	1200	2-12	NZMH4-AEF1200-NA 271119	S	

Switching capacity				Rated current = Rated uninterrupted current	Setting range		Fixed mounting Part no. Article no.	Price See price list	Std. pack
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases Non- delayed			
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_i = I_n \times \dots$			







System and cable protection

Fixed overload release I_r

R.m.s. value measurement and "thermal memory"

42	42	35	35	250	125-250	2-11	NZMN3-AE250-NA 269299	S	1 off
				400	200-400	2-11	NZMN3-AE400-NA 269300		
				600	300-600	2-8	NZMN3-AE600-NA 269301	S	
42	42	35	35	800	400-800	2-12	NZMN4-AE800-NA 271120	S	
				1000	500-1000	2-12	NZMN4-AE1000-NA 271121	S	
				1200	600-1200	2-12	NZMN4-AE1200-NA 271122	S	
100	100	50	50	250	125-250	2-11	NZMH3-AE250-NA 269302	S	1 off
				400	200-400	2-11	NZMH3-AE400-NA 269303	S	
				600	300-600	2-8	NZMH3-AE600-NA 269304	S	
				800	400-800	2-12			
85	85	50	50	1000	500-1000	2-12	NZMH4-AE800-NA 271123	S	
				1200	600-1200	2-12	NZMH4-AE1000-NA 271124	S	
							NZMH4-AE1200-NA 271125	S	

Normal switching capacity



Notes

Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.

B=boxterminals

S=screwterminals

Information relevant for export to North America



Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL CCN	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
NA Certification	UL Listed, CSA certified
Specially designed for NA	Yes
Suitable for	Feeder circuits, branch circuits
Current Limiting CB	1) Yes 2) No
Max. Voltage Rating	600 V
Degree of Protection	IEC: IP20; UL/CSA Type:-

1.5

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, electronic releases, 3 pole

NZM...VEF...NA

1

Fixed mounting

Switching capacity				Rated current = Rated uninterrupted current	Setting range			Part no. Article no.	Price See price list
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases Fixed	Short-circuit releases			
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_i = I_n \times \dots$	$I_{sd} = I_r \times \dots$		

Systems protection, cable protection, selectivity, generator protection


Fixed overload release I,
R.m.s. value measurement and "thermal memory"

Normal switching capacity




35	35	25	—	150	150	1800 A	2-10	NZMN2-VEF150-NA 271126	S
				175	175	2100 A	2-10	NZMN2-VEF175-NA 271127	S
				200	200	2400 A	2-10	NZMN2-VEF200-NA 271128	S
				225	225	2700 A	2-10	NZMN2-VEF225-NA 271129	S
				250	250	3000 A	2-10	NZMN2-VEF250-NA 271130	S

Normal switching capacity



42	42	35	35	250	250	2-11	2-10	NZMN3-VEF250-NA 269308	S
				300	300	2-11	2-10	NZMN3-VEF300-NA 269309	S
				350	350	2-11	2-10	NZMN3-VEF350-NA 269310	S
				400	400	2-11	2-10	NZMN3-VEF400-NA 269311	S
				450	450	2-8	1.5-7	NZMN3-VEF450-NA 269312	S
				500	500	2-8	1.5-7	NZMN3-VEF500-NA 269313	S
				550	550	2-8	1.5-7	NZMN3-VEF550-NA 269314	S
				600	600	2-8	1.5-7	NZMN3-VEF600-NA 269315	S

Normal switching capacity



42	42	35	35	600	600	2-12	2-10	NZMN4-VEF600-NA 271136	S
				700	700	2-12	2-10	NZMN4-VEF700-NA 271137	S
				800	800	2-12	2-10	NZMN4-VEF800-NA 271138	S
				900	900	2-12	2-10	NZMN4-VEF900-NA 271139	S
				1000	1000	2-12	2-10	NZMN4-VEF1000-NA 271140	S
				1200	1200	2-12	2-10	NZMN4-VEF1200-NA 271141	S

Fixed mounting
with box terminals




Part no.
Article no.

Price
See price
list

Std. pack

Information relevant for export to North America

Notes

NZMN2-VEF150-BT-NA 107593	B	1 off 	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.
NZMN2-VEF175-BT-NA 107594	B		UL File No.	E31593	
NZMN2-VEF200-BT-NA 107595	B		UL CCN	DIVA	
NZMN2-VEF225-BT-NA 107596	B		CSA File No.	022086	
NZMN2-VEF250-BT-NA 107597	B		CSA Class No.	1432-01	
			NA Certification	UL Listed, CSA certified	Adjustable delay setting t_r
			Specially designed for NA	Yes	<ul style="list-style-type: none"> • 2 – 20 s at $6 \times I_r$
			Suitable for	Feeder circuits, branch circuits	Adjustable delay t_{sd}
			Current Limiting CB	Yes	<ul style="list-style-type: none"> • Steps 0, 20, 60, 100, 200, 300, 500, 750, 1000 ms
			Max. Voltage Rating	600Y/347 V, 480 V	
			Degree of Protection	IEC: IP20; UL/CSA Type:-	i^2t constant function
Terminals as accessory		1 off 	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	<ul style="list-style-type: none"> • NZM2 fixed OFF • NZM3, NZM4 switchable (ex-works OFF)
			UL File No.	E31593	
			UL CCN	DIVA	
			CSA File No.	022086	
			CSA Class No.	1432-01	
			NA Certification	UL Listed, CSA certified	
			Specially designed for NA	Yes	
			Suitable for	Feeder circuits, branch circuits	
			Current Limiting CB	Yes	
			Max. Voltage Rating	600 V	
			Degree of Protection	IEC: IP20; UL/CSA Type:-	
Terminals as accessory		1 off 			

1.5


Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, electronic releases, 3 pole

1

NZM...VEF...NA

Switching capacity				Rated current = Rated uninterrupted current	Setting range		
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases	
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	Fixed I_r A	Non- delayed $I_j = I_n \times \dots$	Delayed $I_{sd} = I_r \times \dots$






Fixed mounting

Part no. Article no.	Price See price list
-------------------------	----------------------------

Systems protection, cable protection, selectivity, generator protection



Fixed overload release I_r
R.m.s. value measurement and "thermal memory"

High switching capacity



100	100	50	-	150	150	1800 A fixed	2-10	NZMH2-VEF150-NA 271131	S
				175	175	2100 A fixed	2-10	NZMH2-VEF175-NA 271132	S
				200	200	2400 A fixed	2-10	NZMH2-VEF200-NA 271133	S
				225	225	2700 A fixed	2-10	NZMH2-VEF225-NA 271134	S
				250	250	3000 A fixed	2-10	NZMH2-VEF250-NA 271135	S
100	100	50	50	250	250	2-11	2-10	NZMH3-VEF250-NA 269316	S
				300	300	2-11	2-10	NZMH3-VEF300-NA 269317	S
				350	350	2-11	2-10	NZMH3-VEF350-NA 269318	S
				400	400	2-11	2-10	NZMH3-VEF400-NA 269319	S
				450	450	2-8	1.5-7	NZMH3-VEF450-NA 269320	S
				500	500	2-8	1.5-7	NZMH3-VEF500-NA 269321	S
				550	550	2-8	1.5-7	NZMH3-VEF550-NA 269322	S
				600	600	2-8	1.5-7	NZMH3-VEF600-NA 269323	S
85	85	50	50	600	600	2-12	2-10	NZMH4-VEF600-NA 271142	S
				700	700	2-12	2-10	NZMH4-VEF700-NA 271143	S
				800	800	2-12	2-10	NZMH4-VEF800-NA 271144	S
				900	900	2-12	2-10	NZMH4-VEF900-NA 271145	S
				1000	1000	2-12	2-10	NZMH4-VEF1000-NA 271146	S
				1200	1200	2-12	2-10	NZMH4-VEF1200-NA 271147	S

Fixed mounting
with box terminals

Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America	Notes	
NZMH2-VEF150-BT-NA 107598	B	1 off 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Current Limiting CB Max. Voltage Rating Degree of Protection	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593 DIVA 022086 1432-01 UL Listed, CSA certified Yes Feeder circuits, branch circuits Yes 600Y/347 V,480 V IEC: IP20; UL/CSA Type:-	IEC switching performance values shown on type label. Adjustable delay setting t, • 2-20sat6xl, Adjustable delay tsd • Steps 0, 20, 60, 100, 200, 300, 500, 750, 1000 ms izt constant function NZM2 fixed OFF • NZM3, NZM4 switchable (ex-works OFF)
NZMH2-VEF175-BT-NA 107599	B				
NZMH2-VEF200-BT-NA 107840	B				
NZMH2-VEF225-BT-NA 107841	B				
NZMH2-VEF250-BT-NA 107842	B				
Terminals as accessory		1 off 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Current Limiting CB Max. Voltage Rating Degree of Protection	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593 DIVA 022086 1432-01 UL Listed, CSA certified Yes Feeder circuits, branch circuits Yes 600 V IEC: IP20; UL/CSA Type:-	
Terminals as accessory					

1.5


Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, electronic releases, 3 pole

NZM...VE...NA

Fixed mounting


Switching capacity				Rated current = Rated uninterrupted current	Setting range		Part no. Article no.	Price See price list
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Short-circuit releases		
I_{cu}	I_{cu}	I_{cu}	I_{cu}	$I_n = I_u$	I_r	Non- delayed $I_i = I_n \times \dots$	Delayed $I_{sd} = I_r \times \dots$	
kA	kA	kA	kA	A	A			




Systems protection, cableprotection, selectivity, generator protection

Adjustable overload release I_r
R.m.s. value measurement and "thermal memory"


Normal switching capacity



35	35	25	–	100	50-100	1200 A fixed	2-10	NZMN2-VE100-NA 271148	S
				160	80-160	1920 A fixed	2-10	NZMN2-VE160-NA 271149	S
				250	125-250	3000 A fixed	2-10	NZMN2-VE250-NA 271150	S




42	42	35	35	250	125-250	2-11	2-10	NZMN3-VE250-NA 269332	S
				400	200-400	2-11	2-10	NZMN3-VE400-NA 269333	S
				600	300-600	2-8	1.5-7	NZMN3-VE600-NA 269334	S




42	42	35	35	800	400-800	2-12	2-10	NZMN4-VE800-NA 271154	S
				1000	500-1000	2-12	2-10	NZMN4-VE1000-NA 271155	S
				1200	630-1200	2-12	2-10	NZMN4-VE1200-NA 271156	S


High switching capacity



100	100	50	–	100	50-100	1200 A fixed	2-10	NZMH2-VE100-NA 271151	S
				160	80-160	1920 A fixed	2-10	NZMH2-VE160-NA 271152	S
				250	125-250	3000 A fixed	2-10	NZMH2-VE250-NA 271153	S



100	100	50	50	250	125-250	2-11	2-10	NZMH3-VE250-NA 269335	S
				400	200-400	2-11	2-10	NZMH3-VE400-NA 269336	S
				600	300-600	2-8	1.5-7	NZMH3-VE600-NA 269337	S



85	85	50	50	800	400-800	2-12	2-10	NZMH4-VE800-NA 271157	S
				1000	500-1000	2-12	2-10	NZMH4-VE1000-NA 271158	S
				1200	630-1200	2-12	2-10	NZMH4-VE1200-NA 271159	S

Fixed mounting
with box terminals

Part no.
Article no.

Price
See price
list

Std. pack

Information relevant for export to North America

Notes



1

Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America	Notes
NZMN2-VE100-BT-NA 107843	B	1 off 	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.
NZMN2-VE160-BT-NA 107844	B		UL File No. E31593	
NZMN2-VE250-BT-NA 107845	B		UL CCN DIVA	Adjustable delay setting t, • 2–20sat6xh
			CSA File No. 022086	
			CSA Class No. 1432-01	
			NA Certification UL Listed, CSA certified	
			Specially designed for NA Yes	Adjustable delay tsd • Steps: 0, 20, 60, 100, 200, 300, 500, 750,1000 ms
			Suitable for Feeder circuits, branch circuits	
			Current Limiting CB Yes	
			Max. Voltage Rating 600Y/347 V,480 V	i ² t constant function • NZM2 fixed OFF
			Degree of Protection IEC: IP20; UL/CSA Type:-	• NZM3, NZM4 switchable (ex-works OFF)
Terminals as accessory			Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	
			UL File No. E31593	
			UL CCN DIVA	
			CSA File No. 022086	
			CSA Class No. 1432-01	
			NA Certification UL Listed, CSA certified	
			Specially designed for NA Yes	
			Suitable for Feeder circuits, branch circuits	
			Current Limiting CB Yes	
			Max. Voltage Rating 600 V	
			Degree of Protection IEC: IP20; UL/CSA Type:-	
NZMH2-VE100-BT-NA 107846	B	1 off 	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	
NZMH2-VE160-BT-NA 107847	B		UL File No. E31593	
NZMH2-VE250-BT-NA 107848	B		UL CCN DIVA	
			CSA File No. 022086	
			CSA Class No. 1432-01	
			NA Certification UL Listed, CSA certified	
			Specially designed for NA Yes	
			Suitable for Feeder circuits, branch circuits	
			Current Limiting CB Yes	
			Max. Voltage Rating 600Y/347 V,480 V	
			Degree of Protection IEC: IP20; UL/CSA Type:-	
Terminals as accessory			Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking	
			UL File No. E31593	
			UL CCN DIVA	
			CSA File No. 022086	
			CSA Class No. 1432-01	
			NA Certification UL Listed, CSA certified	
			Specially designed for NA Yes	
			Suitable for Feeder circuits, branch circuits	
			Current Limiting CB Yes	
			Max. Voltage Rating 600 V	
			Degree of Protection IEC: IP20; UL/CSA Type:-	

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC magnetic short-circuit releases, 3 pole


NZM...-S...CNA

Rated current =
Rated uninterrupted current
 $I_n = I_u$
A

Setting range
Short-circuit releases
Non-delayed
 $I_i = I_n \times \dots$

Fixed mounting
with screw terminals
Part no.
Article no.

Price
See price
list



Short-circuit protection

Motor protection in conjunction with contactor and overload relay

- With short-circuit release
- Without overload release I_r

Basic switching capacity



1.2	7-12	Screw terminals as accessories	
2	6-11		
3	6-11		
5	6-11		
8	6-11		
12	7-12		
18	7-12		
26	8-13		
33	8-14		
40	8-14		
50	8-14		
63	8-14		
80	8-14		
100	8-13		
1.6	8-14	NZMB2-S1.6-CNA 269472	S
2.4	8-14	NZMB2-S2.4-CNA 269473	S
5	6-11	NZMB2-S5-CNA 103034	S
8	6-11	NZMB2-S8-CNA 103035	S
12	7-12	NZMB2-S12-CNA 103036	S
18	7-12	NZMB2-S18-CNA 103037	S
26	8-13	NZMB2-S26-CNA 103038	S
33	8-14	NZMB2-S33-CNA 103039	S
40	8-14	NZMB2-S40-CNA 269243	S
50	8-14	NZMB2-S50-CNA 269244	S
63	8-14	NZMB2-S63-CNA 269245	S
80	8-14	NZMB2-S80-CNA 269246	S
100	8-14	NZMB2-S100-CNA 269247	S
125	8-14	NZMB2-S125-CNA 269248	S
160	8-14	NZMB2-S160-CNA 269249	S
200	8-13	NZMB2-S200-CNA 269250	S
250	8-10	NZMB2-S250-CNA 102478	S

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC magnetic short-circuit releases, 3 pole

1.5

Fixed mounting
with box terminals
Part no.
Article no.

Price
See price
list

Std. pack

Information relevant for export to North America

Notes

1



						B = box terminals S = screw terminals For further terminal types see accessories
NZMB1-S1.2-CNA 102906	B	1 off 	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking		Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.
NZMB1-S2-CNA 102907	B		UL File No.	E31593		
NZMB1-S3-CNA 102908	B		UL CCN	DKPU2		
NZMB1-S5-CNA 102909	B		CSA File No.	022086		
NZMB1-S8-CNA 103020	B		CSA Class No.	1432-01		
NZMB1-S12-CNA 103021	B		NA Certification	UL Recognized, CSA certified		
NZMB1-S18-CNA 103022	B		Conditions of Acceptability	Only used in motor circuits in conjunction with suitable contactor and overload relay. SCCR value applies for complete combination starter only, consisting of instantaneous trip circuit breaker, contactor and overload relay.		
NZMB1-S26-CNA 103023	B		Specially designed for NA Suitable for	Yes		
NZMB1-S33-CNA 103024	B		Max. Voltage Rating	Branch circuits, feeder circuits 480YJ 277 V		
NZMB1-S40-CNA 281263	B		Degree of Protection	IEC: IP20; UL/CSA Type:-		
NZMB1-S50-CNA 281264	B					
NZMB1-S63-CNA 281265	B					
NZMB1-S80-CNA 281266	B					
NZMB1-S100-CNA 281267	B					
NZMB2-S1.6-BT-CNA 107651	B	1 off 	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking		
NZMB2-S2.4-BT-CNA 107652	B		UL File No.	E31593		
NZMB2-S5-BT-CNA 107653	B		UL CCN	DKPU2		
NZMB2-S8-BT-CNA 107654	B		CSA File No.	022086		
NZMB2-S12-BT-CNA 107655	B		CSA Class No.	1432-01		
NZMB2-S18-BT-CNA 107656	B		NA Certification	UL Recognized, CSA certified		
NZMB2-S26-BT-CNA 107657	B		Conditions of Acceptability	Only used in motor circuits in conjunction with suitable contactor and overload relay. SCCR value applies for complete combination starter only, consisting of instantaneous trip circuit breaker, contactor and overload relay.		
NZMB2-S33-BT-CNA 107658	B		Specially designed for NA Suitable for	Yes		
NZMB2-S40-BT-CNA 107659	B		Max. Voltage Rating	Branch circuits, feeder circuits 600YJ 347 V, 480 V		
NZMB2-S50-BT-CNA 107660	B		Degree of Protection	IEC: IP20; UL/CSA Type:-		
NZMB2-S63-BT-CNA 107661	B					
NZMB2-S80-BT-CNA 107662	B					
NZMB2-S100-BT-CNA 107663	B					
NZMB2-S125-BT-CNA 107664	B					
NZMB2-S160-BT-CNA 107665	B					
NZMB2-S200-BT-CNA 107666	B					
NZMB2-S250-BT-CNA 107667	B					

1.5

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC magnetic short-circuit releases, 3 pole

NZM...-S...CNA

Rated current =
Rated uninterruptible current
 $I_n = I_u$
A

Setting range
Short-circuit releases
Non-delayed
 $I_i = I_n \times \dots$



Fixed mounting
with screw terminals

Part no.
Article no.

Price
See price
list

Std. pack


1



Short-circuit protection

Motor protection in conjunction with contactor and overload relay

- With short-circuit release
- Without overload release I_r

Normal switching capacity



1.2	7-12	1)	NZMN1-S1.2-CNA 103025	B	1 off	 
2	6-11		NZMN1-S2-CNA 103026	B		
3	6-11		NZMN1-S3-CNA 103027	B		
5	6-11		NZMN1-S5-CNA 103028	B		
8	6-11		NZMN1-S8-CNA 103029	B		
12	7-12		NZMN1-S12-CNA 103030	B		
18	7-12		NZMN1-S18-CNA 103031	B		
26	8-13		NZMN1-S26-CNA 103032	B		
33	8-14		NZMN1-S33-CNA 103033	B		
40	8-14		NZMN1-S40-CNA 281276	B		
50	8-14		NZMN1-S50-CNA 281277	B		
63	8-14		NZMN1-S63-CNA 281278	B		
80	8-14		NZMN1-S80-CNA 281279	B		
100	8-13		NZMN1-S100-CNA 281280	B		
1.6	8-14	2)	NZMN2-S1.6-CNA 269478	S		
2.4	8-14		NZMN2-S2.4-CNA 269479	S		
5	6-11		NZMN2-S5-CNA 103040	S		
8	6-11		NZMN2-S8-CNA 103041	S		
12	7-12		NZMN2-S12-CNA 103042	S		
18	7-12		NZMN2-S18-CNA 103043	S		
26	8-13		NZMN2-S26-CNA 103044	S		
33	8-14		NZMN2-S33-CNA 103045	S		
40	8-14		NZMN2-S40-CNA 269255	S		
50	8-14		NZMN2-S50-CNA 269256	S		
63	8-14		NZMN2-S63-CNA 269257	S		
80	8-14		NZMN2-S80-CNA 269258	S		
100	8-14		NZMN2-S100-CNA 269259	S		
125	8-14		NZMN2-S125-CNA 269260	S		
160	8-14		NZMN2-S160-CNA 269261	S		
200	8-13		NZMN2-S200-CNA 269262	S		
250	8-10		NZMN2-S250-CNA 102479	S		

Rated current =
Rated uninterrupted current
 $I_n = I_u$
A

Setting range
Short-circuit releases
Non-delayed
 $I_i = I_n \times \dots$



Fixed mounting
with screw terminals
Part no.
Article no.

Price
See price
list

Std. pack

Short-circuit protection

Motor protection in conjunction with contactor and overload relay

- With short-circuit release
- Without overload release I_r

High switching capacity



Rated current (A)	Setting range	Short-circuit releases	Part no.	Price	Std. pack
1.6	8-14	2)	NZMH2-S1.6-CNA 269482	S	1 off
2.4	8-14		NZMH2-S2.4-CNA 269483	S	
5	6-11		NZMH2-S5-CNA 103046	S	
8	6-11		NZMH2-S8-CNA 103047	S	
12	7-12		NZMH2-S12-CNA 103048	S	
18	5-9		NZMH2-S18-CNA 103049	S	
26	8-13		NZMH2-S26-CNA 103050	S	
33	8-14		NZMH2-S33-CNA 103051	S	
40	8-14		NZMH2-S40-CNA 269267	S	
50	8-14		NZMH2-S50-CNA 269268	S	
63	8-14		NZMH2-S63-CNA 269269	S	
80	8-14		NZMH2-S80-CNA 269270	S	
100	8-14		NZMH2-S100-CNA 269271	S	
125	8-14		NZMH2-S125-CNA 269272	S	
160	8-14		NZMH2-S160-CNA 269273	S	
200	8-13		NZMH2-S200-CNA 269274	S	
250	8-10		NZMH2-S250-CNA 102490	S	

Notes

B = box terminals
S = screw terminals

For further terminal types see accessories

Switches correspond with both UL/CSA and IEC regulations.
IEC switching performance values shown on type label.

Information relevant for export to North America



Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL CCN	DKPU2
CSA File No.	022086
CSA Class No.	1432-01
NA Certification	UL Recognized, CSA certified
Conditions of Acceptability	Only used in motor circuits in conjunction with suitable contactor and overload relay. SCCR value applies for complete combination starter only, consisting of instantaneous trip circuit breaker, contactor and overload relay.
Specially designed for NA	Yes
Suitable for	Branch circuits, feeder circuits
Max. Voltage Rating	1) 480Y/277 V 2) 600Y/347 V, 480 V
Degree of Protection	IEC: IP20; UL/CSA Type:-

1.5

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, electronic releases, 3 pole

NZM...ME...NA, NZM...SE...CNA

Switching capacity		Rated current = Rated uninterrupted current	Setting range		Motor power 460 V 480 V HP	Fixed mounting with screw terminals Part no. Article no.	Price See Price list
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz		Overload releases	Short-circuit releases Non-delayed			
I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A	$I_i = I_n \times \dots$			


Motor protection

100% rated


Adjustable overload releases

For use in motor circuits with contactor.

Additional motor protective characteristics (calibration) to UL508, CSA-C22.2 No. 14-05



High switching capacity



35	35	90	45-90	2-14	60	NZMN2-ME90-NA 118964	S
		140	70-140	2-14	100	NZMN2-ME140-NA 118965	S
		200	100-200	2-14	150	NZMN2-ME200-NA 118966	S
100	100	90	45-90	2-14	60	NZMH2-ME90-NA 118967	S
		140	70-140	2-14	100	NZMH2-ME140-NA 118968	S
		200	100-200	2-14	150	NZMH2-ME200-NA 118969	S

Fixed mounting with screw terminals

Rated current = Rated uninterrupted current	Setting range Short- circuit releases	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America	Notes
$I_n = I_u$ A	Non- delayed $I_i = I_n \times \dots$					

Short-circuit protection

Motor protection in conjunction with contactor and overload relay


- With short-circuit release
- Without overload release ..

B=boxterminals

S=screw terminals

For further terminal types see accessories

Normal switching capacity



90	2-14	NZMN2-SE90-CNA 271160	S	1 off	Product Standards UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E31593 DKPU2 022086 1432-01 UL Recognized, CSA certified Only used in motor circuits in conjunction with suitable contactor and overload relay. SCCR value applies for complete combination starter only, consisting of instantaneous trip circuit breaker, contactor and overload relay. Yes Branch circuits, feeder circuits 480 V IEC: IP20; UL/CSA Type:-	Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.
		NZMN2-SE140-CNA 271161	S			
		NZMN2-SE220-CNA 271162	S			

UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification

Conditions of Acceptability

Specially designed for NA
Suitable for

Max. Voltage Rating
Degree of Protection

Fixed mounting

Part no. Article no.	Price See Price list	Std. pack	Information relevant for export to North America	Notes
NZMN2-ME90-BT-NA 142421	S	1 off	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NZMN2-ME140-BT-NA 142422	S		UL CCN NA Certification	DIVA Request filed for UL and CSA
NZMN2-ME200-BT-NA 142423	S		Specially designed for NA	Yes, additionally calibrated according to UL 508
NZMH2-ME90-BT-NA 142424	S		Suitable for	Feeder circuits, branch circuits
NZMH2-ME140-BT-NA 142425	S	1 off	Max. Voltage Rating Degree of Protection	480 V IEC: IP20; UL/CSA Type:-
NZMH2-ME200-BT-NA 142426	S			

B = box terminals
S = screw terminals
For further terminal types see accessories


Switches correspond with both UL/CSA and IEC regulations. IEC switching performance values shown on type label.

Adjustable delay setting t_d
• 2 – 20 s at 6 x I_n

Fixed mounting with screw terminals

Rated current = Rated uninterrupted current $I_n = I_u$ A	Setting range Short- circuit releases Non- delayed $I_i = I_n \times \dots$	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America	Notes
Short-circuit protection Motor protection in conjunction with contactor and overload relay					B=boxterminals S=screw terminals For further terminal types see accessories	
220	2-14	NZMN3-SE220-CNA 269341		S 1 off	Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
350	2-14	NZMN3-SE350-CNA 269342		S	UL File No. UL CCN CSA File No. CSA Class No. NA Certification	EK31593 DKPU2 022086 1432-01 UL Recognized, CSA certified
450	2-12	NZMN3-SE450-CNA 284465		S	Conditions of Acceptability	IEC switching performance values shown on type label.
					Specially designed for NA Suitable for	Only used in motor circuits in conjunction with suitable contactor and overload relay. SCCR value applies for complete combination starter only, consisting of instantaneous trip circuit breaker, contactor and overload relay.
					Max. Voltage Rating Degree of Protection	Yes Branch circuits, feeder circuits 480 V IEC: IP20; UL/CSA Type:-

Normal switching capacity



1.5

Circuit-breakers, switch-disconnectors

Circuit-breakers UL/CSA, IEC, thermomagnetic releases, 4 pole

NZM...-4-AF...NA


Switching capacity				Rated current = Rated uninterrupted current	Setting range		
SCCR 480Y/ 277 V 60 Hz	SCCR 480 V 60 Hz	SCCR 600Y/ 347 V 60 Hz	SCCR 600 V 60 Hz		Overload releases	Neutral conductor $I_r \times \% \text{ of phase conductor}$ %	Short-circuit releases Non-delayed $I_1 = I_n \times \dots$
I_{cu} kA	I_{cu} kA	I_{cu} kA	I_{cu} kA	$I_n = I_u$ A	I_r A		



System and cable protection


Fixed overload releases I_r

Basic switching capacity




25	25	–	–	125	125	100	Approx. 6 - 10
–	–	–	–	150	150	100	Approx. 6 - 10
–	–	–	–	175	175	100	Approx. 6 - 10
–	–	–	–	200	200	100	Approx. 6 - 10
–	–	–	–	225	225	100	Approx. 6 - 10

Normal switching capacity



35	35	–	–	250	250	100	Approx. 6 - 10
–	–	–	–	125	125	100	Approx. 6 - 10
–	–	–	–	150	150	100	Approx. 6 - 10
–	–	–	–	175	175	100	Approx. 6 - 10
–	–	–	–	200	200	100	Approx. 6 - 10
–	–	–	–	225	225	100	Approx. 6 - 10

High switching capacity



150	150	–	–	250	250	100	Approx. 6 - 10
100	100	–	–	125	125	100	Approx. 6 - 10
–	–	–	–	150	150	100	Approx. 6 - 10
–	–	–	–	175	175	100	Approx. 6 - 10
–	–	–	–	200	200	100	Approx. 6 - 10
–	–	–	–	225	225	100	Approx. 6 - 10
–	–	–	–	250	250	100	Approx. 6 - 10

Fixed mounting
with box terminals

Part no.
Article no.

Price
See price
list

Std. pack

Information relevant for export to North America

Notes

1

B = box terminals
S = screw terminals

For further terminal types see
accessories

Part no.	Price	Std. pack	Information relevant for export to North America	Notes
NZMB2-4-AF125-BT-NA 113011	B	1 off  	Product Standards UL File No.	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
NZMB2-4-AF150-BT-NA 113012	B		UL CCN CSA File No.	E31593 DIVD
NZMB2-4-AF175-BT-NA 113013	B		CSA Class No. NA Certification	UL Listed Yes
NZMB2-4-AF200-BT-NA 113014	B		Specially designed for NA Suitable for	Feeder circuits, branch circuits Yes
NZMB2-4-AF225-BT-NA 113015	B		Current Limiting CB Max. Voltage Rating	480 V IEC: IP20; UL/CSA Type:-
NZMB2-4-AF250-BT-NA 113016	B		Degree of Protection	
NZMN2-4-AF125-BT-NA 113005	B	1 off  		
NZMN2-4-AF150-BT-NA 113006	B			
NZMN2-4-AF175-BT-NA 113007	B			
NZMN2-4-AF200-BT-NA 113008	B			
NZMN2-4-AF225-BT-NA 113009	B			
NZMN2-4-AF250-BT-NA 113010	B			
NZMH2-4-AF125-BT-NA 113017	B	1 off  		
NZMH2-4-AF150-BT-NA 113018	B			
NZMH2-4-AF175-BT-NA 113019	B			
NZMH2-4-AF200-BT-NA 113020	B			
NZMH2-4-AF225-BT-NA 113021	B			
NZMH2-4-AF250-BT-NA 113022	B			

1.5

Circuit-breakers, switch-disconnectors

Molded case switches for North America

NS...NA

1

Rated current = Rated
uninterrupted current

Switching capacity

SCCR SCCR SCCR SCCR
480Y/ 480 V 600Y/ 600 V
277 V 60 Hz 347 V 60 Hz
60 Hz

Response
value of
short-circuit
releases

Fixed mounting
with screw terminals

Part no. Price
Article no. See price
list

$I^n = I^u$
A

I_{cu} I_{cu} I_{cu} I_{cu} I_i
kA kA kA kA A



Molded case switches for North America


With permanently set short-circuit release (self-protection)

3 switch positions I, +, 0


Can be remotely operated with shunt release XU/XA, remote operator XR,

Can be equipped with trip-indicating auxiliary contact M22-K..


Rated current (A)	SCCR (kA)	SCCR (kA)	SCCR (kA)	SCCR (kA)	Response value (A)	Part no.	Price
63	35	—	—	—	1250	Screw terminals as accessories	
100					1250		
125					1250		



160	100	100	50	—	2500	NS2-160-NA 102684	S
200					2500	NS2-200-NA 102685	S
250					2500	NS2-250-NA 102686	S



400	100	100	50	50	6600	NS3-400-NA 102687	S
600					6600	NS3-600-NA 102688	S






800	65	65	42	42		NS4-800-NA 102689	S
1000					25000	NS4-1000-NA 102690	S
1200					25000	NS4-1200-NA 102691	S

Fixed mounting
with box terminals

Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America	Notes
-------------------------	----------------------------	-----------	--	-------

B = box terminals
S = screw terminals
For further terminal types
see accessories

NS1-63-NA 102681	B	1 off 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Max. Voltage Rating Degree of Protection	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E148671 WJAZ 022086 4652-06 UL Listed, CSA certified Yes Feeder circuits, branch circuits 480Y/277 V IEC: IP20; UL/CSA Type:-	IEC/EN 60947-2: circuit-breaker without overcurrent protection (CBI-X) with main switch characteristics and isolating characteristics to IEC/EN 60204
NS1-100-NA 102682	B				
NS1-125-NA 102683	B				
NS2-160-BT-NA 107578	B	1 off 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Max. Voltage Rating Degree of Protection	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E148671 WJAZ 022086 4652-06 UL Listed, CSA certified Yes Feeder circuits, branch circuits 480Y/277 V IEC: IP20; UL/CSA Type:-	
NS2-200-BT-NA 107579	B				
NS2-250-BT-NA 107610	B				
Terminals as accessory		1 off 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for Max. Voltage Rating Degree of Protection	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking E148671 WJAZ 022086 4652-06 UL Listed, CSA certified Yes Feeder circuits, branch circuits 480Y/277 V IEC: IP20; UL/CSA Type:-	

1.6 Circuit-breakers, switch-disconnectors


Terminals

NZM1

HPL17082EN

1

Box terminal Standard equipment



3 pole

NZM1,
PN1,
N(S)1

Copper cable

1 x 10 - 70
2 x 6 - 25
1)

1 x 12 - 2/0

≧ 2 x 9 x 0.8

–

4 pole

NZM1-4,
PN1-4,
N1-4


1 x 10 - 70
2 x 6 - 25
1)

1 x 12 - 2/0

≧ 2 x 9 x 0.8

–

Screw terminals



3 pole

NZM1,
PN1,
N(S)1

Copper cable
lugs

1 x 10 - 70
2 x 6 - 25
1 x 10 - 35

1 x 12 - 2/0

–

≧ 12 x 5

Aluminium cable
lugs

2 x 10 - 35
1)

4 pole

NZM1-4,
PN1-4,
N1-4


1 x 10 - 70
2 x 6 - 25
1 x 10 - 35
2 x 10 - 35
1)

1 x 12 - 2/0

–

≧ 12 x 5

Tunnel terminal



3 pole

NZM1,
PN1,
N(S)1

Copper
cable
Aluminium
cable

1 x 16 - 95
1)

1 x 6 - 3/0

–

–

4 pole

4 pole
PN1-4,
N1-4

NZM1-4,
1)

1 x 16 - 95
1)


1 x 6 - 3/0

–

–

Rear terminal bolts

Not UL/CSA approved



3 pole

NZM1,
PN1,

Copper cable
lugs

1 x 10-70
2 x 6-25
1 x 10-35
2 x 10-35
1)

–

–

min. 12 x 5

max. 16 x 5

4 pole

NZM1-4,
PN1-4,
N1-4

Aluminium cable
lugs

1 x 10-70
2 x 6-25
1 x 10-35
2 x 10-35
1)

–




–

min. 12 x 5

max. 16 x 5

Notes

1) Up to 95 mm² can be connected depending on make of cable.

Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes	Information relevant for export to North America	
NZM1-XKC 260015		1 set 	Standard connection with all NZM1, PN1 and N(S)1 switches. Conversion kit for circuit-breaker with screw terminal. Contains parts for a 3 or 4 pole switch side. Fitted within the switch housing.	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Suitable for	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E31593 DIHS 022086 1437-01 UL Listed, CSA certified Referto main component information
NZM1-4-XKC 267075		1 set	Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules.		
NZM1-XKS 260019		1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit-breakers. Flush mounting outside the switch housing. Cover NZM1(-4)-XKSA must be fitted (included as standard).	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Suitable for	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E31593 DIHS 022086 1437-01 UL Listed, CSA certified Referto main component information
NZM1-4-XKS 266725		1 set			
NZM1-XKA 266730		1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. With control circuit terminal for 1 x 0.75 - 2.5 mm ² (18 - 14 AWG) or 2 x 0.75 - 1.5 mm ² (18 - 14 AWG) copper conductor. Flush mounting outside the switch housing. Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules. Cover NZM1(-4)-XKSA must be fitted (included as standard).	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Suitable for	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E31593 DIHS 022086 1437-01 UL Listed, CSA certified Referto main component information
NZM1-4-XKA 266731					
NZM1-XKR 266734		1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches.		
NZM1-4-XKR 266737					

1.6


Circuit-breakers, switch-disconnectors

Terminals


NZM1

Max. cable connection area	Number of poles	For use with	Connection	Terminal capacity ¹⁾ mm ²	AWG/kcmil
----------------------------	-----------------	--------------	------------	---	-----------

Control cable terminals




–	3 and 4 pole	NZM1(-4), PN1(-4), N(S)1(-4)	Screw terminals	1 x 0.75-2.5 2 x 0.75-1.5	1 x 18-14 2 x 18-16
---	--------------	------------------------------	-----------------	------------------------------	------------------------



–	3 and 4 pole	NZM1(-4), PN1(-4), N(S)1(-4)	Box terminal	1 x 0.75-2.5 2 x 0.75-1.5	1 x 18-14 2 x 18-16
---	--------------	------------------------------	--------------	------------------------------	------------------------


For box terminal



Terminal covers knockout Not UL/CSA approved

–	3 pole	NZM1, PN1, N1	–	–	–
–	4 pole	NZM1-4, PN1-4, N1-4	–	–	–

Cover



–	3 pole	NZM1, PN1, N(S)1	–	–	–
–	4 pole	NZM1-4, PN1-4, N1-4	–	–	–

For box terminal



IP2X protection against contact with finger


–	3 pole	NZM1, PN1, N1	–	–	–
–	4 pole	NZM1-4, PN1-4, N1-4	–	–	–




For covers NZM1(-4)-XKSA or NZM1...(C)NA, N(S)1...NA













–	3 pole	NZM1, PN1, NS1	–	–	–
–	4 pole	NZM1-4, PN1-4, N1-4	–	–	–

Phase isolators



–	3 pole	NZM1, PN1, N(S)1	–	–	–
–	4 pole	NZM1-4, PN1-4, N1-4	–	–	–










Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes	Information relevant for export to North America  
NZM1-XSTS 260150		1 off  	Contains two terminal locations located at top or bottom for 3 or 4 pole circuit-breakers. Included as standard with tunnel terminal. Degree of protection IP1X Height or thickness of connections: 2 mm	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification
NZM1-XSTK 266739		1 off  	Contains two terminal locations located at top or bottom for 3 or 4 pole circuit-breakers. Included as standard with tunnel terminal. Degree of protection IP1X Height or thickness of connections: 2 mm	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 DIHS 022086 1437-01 UL Listed, CSA certified Refer to main component information
NZM1-XKSFA 100780		1 off	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches.	UL/CSA certification not required
NZM1-4-XKSFA 100781		1 off	Enhanced contact protection (simplified finger protection). Cannot be combined with NZM-XSTK control circuit terminal	–
NZM1-XKSA 260021		1 off  	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Contact protection against direct contact where cable lugs, bars or tunnel terminals are used. Contained in the set with tunnel terminals and screw terminals. When using insulated conductor material to degree of protection IP1X.	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification
NZM1-4-XKSA 266741		1 off		Suitable for – UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 DIHS 022086 1437-01 UL Listed, CSA certified Refer to main component information
NZM1-XIPK 266744		1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches.	–
NZM1-4-XIPK 266745		1 set	Enhanced contact protection to IP2X. Protection when reaching into the cable connection area with the connection of cables in the box terminal. Cannot be combined with NZM-XSTK control circuit terminal	–
NZM1-XIPA 266748		1 set  	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches.	UL/CSA certification not required
NZM1-4-XIPA 266749		1 set	Enhanced contact protection to IP2X.	–
NZM1-XKP 119862		1 set  	Contains parts, including insulating plate for mounting plate, for a terminal located at top or bottom for 3 or 4 pole circuit-breakers. Insulation protection up to a rated operating voltage U_a of 415 V AC when minimum distances are not maintained.	UL/CSA certification not required
NZM1-4-XKP 119863		1 set	Can not be combined with connection on rear NZM11-41-XKR.	–

1.6 Circuit-breakers, switch-disconnectors

Terminals






1

NZM2

	Max. cable connection area	Number of poles	For use with	Terminal capacity		Terminal capacity		
				Cable Cable lugs	Terminal capacity ¹⁾ mm ²	AWG/kcmil	Copper strip No. of discs × width × disc thickness mm	Copper bar width × thickness mm
Box terminal 		3 pole	NZM2, PN2, N(S)2 ≤160 A	Copper cable	1 x 10-185 2 x 4-70	1 x 12 - 350	≧2 x 9 x 0.8	–
			NZM2, PN2, N(S)2 > 160 A					
Screw terminals Standard equipment 		3 pole	NZM2, PN2, N(S)2	Copper cable lugs	1 x 10 - 185 2 x 4 - 70 1 x 10 - 50	1 x 12 - 350	≧2 x 16 x 0.8	≧16 x 5
			NZM2-4, PN2-4, N2-4	Aluminium cable lugs	2 x 10 - 50			
Tunnel terminal 		3 pole	NZM2, PN2, N(S)2	Copper cable Aluminium cable	1 x 16 - 185 1 x 16 - 185 Up to 240 mm ² can be connected depending on the cable manufacturer.	1 x 6 - 350	–	–
			NZM2-4, PN2-4, N2-4					
Rear terminal bolts 	Not UL/CSA approved When using cable lugs without NZM3(-4)-XKSA cover, they must be insulated.							
		3 pole	NZM2, PN2, N2	Copper cable lugs	1 x 10 - 185 2 x 4 - 70 1 x 10 - 50	–	≧2 x 16 x 0.8 ≧6 x 24 x 0.5	≧16 x 5 ≧20 x 5
		4 pole	NZM2-4, PN2-4, N2-4	Aluminium cable lugs	2 x 10 - 50			

Notes

¹⁾ Up to 240 mm² can be connected depending on the cable manufacturer.

Part no. suffix Article no. for ordering with basic device	Price See price list	Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes	Information relevant for export to North America 
+NZM2-160-XKCO 262218		NZM2-160-XKC 262240		1 set 	Part no. suffix and part no. contain parts for a circuit-breaker side at top or bottom for 3 or 4 pole switches. Conversion kit for circuit-breaker with screw terminal. Fitted within the switch housing. O=for fitting at the top U=for fitting at the bottom Ue ≥ 525 V AC:	Product StandardsUL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Referto main component information
+NZM2-160-XKCU 262223		–	1 set 			
+NZM2-250-XKCO 262242		NZM2-250-XKC 262244		1 set		
+NZM2-250-XKCU 262243		–		1 set		
+NZM2-4-160-XKCO 266751		NZM2-4-160-XKC 266755		1 set	Use NZM21-41-XKSA cover Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules	–
+NZM2-4-160-XKCU 266753		–		1 set		
+NZM2-4-250-XKCO 266752		NZM2-4-250-XKC 266756		1 set		
+NZM2-4-250-XKCU 266754		–		1 set		
		NZM2-XKS 260030		1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Standard connection with all NZM2, PN2 and N2 circuit-breakers. Conversion kitfor circuit-breakerwith box terminal. Use special cable lugs narrow version, →17/88 Fitted within the switch housing. If a bar is used, insulation (400 mm) e.g sleeving and a NZM21-41-XKSA cover are required. UO - 525 V AC: With all other connection materials, e.g. cables and strips, use cover NZM21-41-XKSA.	Product StandardsUL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Referto main component information
		NZM2-4-XKS 266750		1 set		
		NZM2-XKA 271457		1 set 		
		NZM2-4-XKA 271458		1 set	Cover NZM21-41-XKSA must be fitted (included as standard).	–
+NZM2-XKRO 266763		NZM2-XKR 266765		1 set	Part no. suffix and part no. contain parts for a circuit-breaker side at top or bottom for 3 or 4 pole switches. O=for fitting at the top U=for fitting at the bottom	–
+NZM2-XKRU 266764		–		1 set		
+NZM2-4-XKRO 266766		NZM2-4-XKR 266768		1 set		
+NZM2-4-XKRU 266767		–		1 set		









1.6









Circuit-breakers, switch-disconnectors

Terminals

1

NZM2

	Number of poles	For use with	Terminal capacity		Part no. suffix Article no. for ordering with basic device	Price See price list
			Connection	Terminal capacity ¹⁾ mm ²		
Control cable terminals 	3 and 4 pole	NZM2(-4), PN2(-4), N(S)2(-4)	Screw terminals	1 x 0.75 - 2.5 2 x 0.75 - 1.5	1 x 18 - 14 2 x 18 - 16	-
	3 and 4 pole	NZM2(-4), PN2(-4), N(S)2(-4)	Box terminal	1 x 0.75 - 2.5 2 x 0.75 - 1.5	1 x 18 - 14 2 x 18 - 16	-
Cable lug cover 	3 pole	NZM2, PN2, NS3	Copper cable lugs	1 x 10-185 2 x 4-70	-	-
	4 pole	NZM2-4, PN2-4, N2-4	Aluminium cable lugs	1 x 10-50 2 x 10-50	-	-
Cover 	3 pole	NZM2, PN2, NS2	-	-	-	-
	4 pole	NZM2-4, PN2-4, N2-4	-	-	-	-
Phase isolators 	3 pole	NZM2, PN2, N(S)2	-	-	-	-
	4 pole	NZM2-4, PN2-4, N2-4	-	-	-	-
Terminal covers, knockout 	3 pole	NZM2, PN2, N(S)2	-	-	-	+NZM2-XKSFAO 108269
						+NZM2-XKSFAU 108270
	4 pole	NZM2-4, PN2-4, N2-4	-	-	-	+NZM2-4-XKSFAO 108271
						+NZM2-4-XKSFAU 108272
For box terminal 	IP2X protection against contact with finger					
	3 pole	NZM2, PN2, N(S)2	-	-	-	-
	For covers NZM2(-4)-XKSA or NZM2(-4) or NZM2... (C)NA and N(S)2... NA					
	3 pole	NZM2, PN2, N(S)2	-	-	-	-
Copper cable lug 	3 and 4 pole	NZM2(-4), PN2(-4), N2(-4)	-	150 mm ²	-	-
				120 mm ²	-	-
				95 mm ²	-	-
				185 mm ²	-	-

Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes	Information relevant for export to North America 
NZM2-XSTS 260156		1 set 	Contains parts for two terminal locations located at top or bottom for 3 or 4 pole switches. Included as standard with tunnel terminal. Degree of protection IP1X	Product StandardsUL489; CSA-C22.2 No. 5-09; IEC60947 UL File No. CE marking UL CCN E140305 CSA File No. DIHS CSA Class No. 022086 NA Certification 1437-01 Suitable for UL Listed, CSA certified Refer to main component information
NZM-XSTK 266739		1 set 	NZM-XSTK cannot be combined with NZM1(-4)-XIPK IP2X protection against contact with a finger. Height or thickness of connections: 2 mm	
NZM2-XKSAE 119868		1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches.	UL/CSA certification not required
NZM2-4-XKSAE 119870		1 set	Contact protection where cable lugs are used on screw terminals - When using insulated conductor material, degree of protection IP2X	-
NZM2-XKSA 260038		1 off 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Contact protection where cable lugs, bars or tunnel terminals are used. When using insulated conductor material, degree of protection IP1X	Product StandardsUL489; CSA-C22.2 No. 5-09; IEC60947 UL File No. CE marking UL CCN E140305 CSA File No. DIHS CSA Class No. 022086 NA Certification 1437-01 Suitable for UL Listed, CSA certified Refer to main component information
NZM2-4-XKSA 266770		1 off		
NZM2-XKP 119864		1 set 	Contains parts, including insulating plate for mounting plate, for a terminal located at top or bottom for 3 or 4 pole circuit-breakers. Can not be combined with connection on rear NZM2(-4)-XKR.	UL/CSA certification not required
NZM2-4-XKP 119865		1 set	Insulation protection up to a rated operating voltage U_o of 415 V AC when minimum distances are not maintained.	-
NZM2-XKSFA 104640		1 off 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Enhanced contact protection (simplified finger protection).	UL/CSA certification not required
NZM2-4-XKSFA 104641		1 off	O = for fitting at the top U = for fitting at the bottom	
NZM2-XIPK 266773		1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches.	UL/CSA certification not required
NZM2-4-XIPK 266774		1 set	Enhanced contact protection to IP2X. Protection on grasping terminal chamber when connecting cables in box terminals. With two conductors maximum cross-section 25 mm ² or AWG4. Can not be combined with control cable terminal NZM-XSTK.	-
NZM2-XIPA 266777		1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches.	UL/CSA certification not required
NZM2-4-XIPA 266778		1 set	Enhanced contact protection to IP2X. When fitting to NZM2-...(C)NA or NZM...-NA: With 2 conductors maximum cross-section 25 mm ² or AWG4.	-
KS150-NZM7 059777		3 off	Contains a cable lug for 3 or 4 pole switch. Special cable lug, narrow style	
KS120-NZM7 059776				
KS95-NZM7 059775				
NZM2-XKS185 260032				






1.6 Circuit-breakers, switch-disconnectors

Terminals

1

NZM3






HPL17090EN

Max. cable connection area	Number of poles	For use with	Rated current ¹⁾ I_n A	Terminal capacity		Terminal capacity		
				Cable Cable lugs	Terminal capacities ¹⁾ mm ²	AWG/kcmil	Copper strip No. of discs × width × disc thickness mm	Copper bar width × thickness mm
Box terminal								
	3 pole	NZM3(-4), PN3(-4), N(S)3(-4)	max. 500 400 UL/ CSA	Copper cable Copper cable	1 x 35 - 240 2 x 16 - 120	1 x 2 - 350	min. 6 x 16 x 0.8 max. 10 x 24 x 1.0 or max. 11 x 21 x 1 10 x 24 x 1.0 + 5 x 24 x 1.0 or (2 x) 8 x 24 x 1.0	–
			630	Copper cable	1 x 35 - 240 2 x 16 - 120	1 x 2 - 350		
Screw connection, standard								
	3 pole	NZM3, PN3, N(S)3	630	Copper cable lugs	1 x 16 - 300 2 x 16 - 240	1 x 4 - 350 2 x 350	10 x 32 x 1.0 + 5 x 32 x 1.0	30 x 10 + 30 x 5
			Max. 400	Aluminium cable lugs	1 x 10 - 120 2 x 10 - 120	1 x 4 - 350 2 x 350		
Connection width extension								
One hole, for screws or terminals								
	3 pole	NZM3, PN3, N(S)3	630	Copper cable lugs	2 x 300	2 x 500	(2 x) 10 x 50 x 1.0	(2 x) 10 x 50
					Aluminium cable lugs			
Two holes, for screws or terminals								
	3 pole	NZM3,PN3, N(S)3	630	Copper cable lugs	NZM3- XKV70-2: 4 x 35 - 185 NZM3- XKV70-2 + NZM4-XKA: 4 x 50 - 240	NZM3- XKV70-2: 2 x 350 NZM3- XKV70-2 + NZM4- XKA: 4 x 500	NZM3-XKV70-2 + NZM4-XKB: ≅ 6 x 16 - 0.8 ≅ (2 x) 10 x 32 x 1	(2 x) 10 x 50
One threaded stud								
	3 pole	NZM3, PN3, N(S)3	630	Copper cable lugs	2 x 95-300	2 x 500	(2x) 10 x 32 x 1.0	(2 x) 10 x 40

NZM3

HPL17091EN










1

Part no. suffix Article no. for ordering with basic device	Price See price list	Part no. Article no. separately	Price See price list	Std. pack	Notes	Information relevant for export North America	
+NZM3-XKCO 262246		NZM3-XKC 260042		1 set 	Part no. suffix and part no. contain parts for a circuit-breaker side at top or bottom for 3 or 4 pole switches. Conversion kit for circuit-breaker with screw terminal. Fitted within the switch housing. O = for fitting at the top U = for fitting at the bottom $U_e \geq 525$ V AC. Use NZM3(-4)-XKSA cover. Use ferrules with flexible and highly flexible conductors. Observe limited cable cross-section through sleeve.	Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
+NZM3-XKCU 262245		–				UL File No.	E31593
						UL CCN	DIHS
						CSA File No.	022086
						CSA Class No.	1437-01
						NA Certification	UL Listed, CSA certified
						Suitable for	Refer to main component information
+NZM3-4-XKCO 266781		NZM3-4-XKC 266783		1 set			
+NZM3-4-XKCU 266782		–					
–	–	NZM3-XKS 260039		1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Standard connection with all NZM3, PN3 and N3 circuit-breakers. Conversion kit for circuit-breaker with box terminal. Use special cable lugs narrow version, \boxtimes 17/88 Fitted within the switch housing. If a bar is used, insulation (400 mm) heat-shrink tubing and a cover NZM3(-4)-XKSA are required. $U_e \geq 525$ V AC. For all other connection types use cover NZM3(-4)-XKSA.	Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
						UL File No.	E31593
						UL CCN	DIHS
						CSA File No.	022086
						CSA Class No.	1437-01
						NA Certification	UL Listed, CSA certified
						Suitable for	Refer to main component information
–	–	NZM3-4-XKS 266780		1 set		–	
–	–	NZM3-XKV70 100514		1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Central drilling for e.g. up to 2 cable lugs per phase. For fitting to switches with screw terminal. Phase isolator and insulation plate are included as standard. Distance between pole centres with NZM3(-4)-XKV70: 70 mm Hole for control wire exists. Connection terminals NZM3(-4)-XK300 and NZM3(-4)-XK22X21 can be installed.	Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
						UL File No.	E140305
						UL CCN	DIHS
						CSA File No.	022086
						CSA Class No.	1432-01
						NA Certification	UL Listed, CSA certified
–	–	NZM3-4-XKV70 100515		1 set		–	
–	–	NZM3-XKV70-2 119860		1 set 	Contains parts for a terminal located at top or bottom for 3 pole circuit-breakers. Double hole fitting for up to four 185 mm ² cable lugs, 50 mm bbar or large flat cable terminal NZM4-XKB or large tunnel terminal NZM4-XKA For fitting to switches with screw terminal. Phase isolator, insulation plate and 2 control circuit terminals supplied.	Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
						UL File No.	E140305
						UL CCN	DIHS
						CSA File No.	022086
						CSA Class No.	1432-01
						NA Certification	UL Listed, CSA certified
–	–	NZM3-4-XKV70-2 132673		1 set		–	
–	–	NZM3-XKV70KB 112884		1 set 	Contains parts for a terminal located at top or bottom for 3 pole circuit-breakers. Threaded stud for cable lugs up to 2 × 300 mm ² For fitting to switches with screw terminal. Phase isolator, insulation plate and 2 control circuit terminals supplied.	–	

1.6 Circuit-breakers, switch-disconnectors

Terminals






1 NZM3

	Max. cable connection area	Number of poles	For use with	Rated current ¹⁾ I_n A	Terminal capacity		Terminal capacity		
					Cable Cable lugs	Terminal capacities ¹⁾ mm ²	AWG/kcmil	Copper strip No. of discs × width × disc thickness m	Copper bar width × thickness m
Terminals for connection width extension									
		3 pole	NZM3, PN3, N(S)3	Max. 500	Copper cable	1 x 120 - 300	–	–	–
		4 pole	NZM3-4, PN3-4, N3-4						
Not UL/CSA approved									
		3 pole	NZM3, PN3, N(S)3	630	–	–	–	(2 ×) 11 x 21 x 1.0	–
		4 pole	NZM3-4, PN3-4, N3-4						
Tunnel terminal									
		3 pole	NZM3, PN3, N(S)3	Max. 350	Copper cable	1 x 16 - 185	1 x 6 - 350		
		4 pole	NZM3-4, PN3-4, N3-4		Aluminium cable				
		3 pole	NZM3, PN3, N(S)3	Max. 630	Copper cable	1 x 50-240	1 x 0-500		
		4 pole	NZM3-4, PN3-4, N3-4		Aluminium cable	2 x 50-240	2 x 0-500		
Rear terminal bolts									
Not UL/CSA approved									
		3 pole	NZM3, PN3, N3	Max. 630	Copper cable lugs	1 x 16-240 2 x 16-240		min. 6 x 16 x 0.8 max. 10 x 32 x 1.0	min. 20 x 5 max. 30 – 10
		4 pole	NZM3-4, PN3-4, N3-4	Max. 500	Aluminium cable lugs	1 x 10-120 2 x 10-120			
Control cable terminals									
		3 and 4 pole	NZM3, PN3, N(S)3		Screw terminals	1 x 0.75-2.5 2 x 0.75-1.5	1 x 18-14 2 x 18-16		
		3 and 4 pole	NZM3-4, PN3, N(S)3-4		Box terminal	1 x 0.75-2.5 2 x 0.75-1.5	1 x 18-14 2 x 18-16		

Notes

¹⁾ The rated operational current values have been determined according to IEC/EN 60947 (switchgear standard). They generally relate to the max. defined cross-sections and are intended as a general guide. The engineering standards which apply in each case must be observed.

NZM3

















Part no. suffix Article no. for ordering with basic device	Price See price list	Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes	Information relevant for export to North America 
–		NZM3-XK300 100782		1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Only in combination with connection width extension NZM3-4-XKV70. Use ferrules with flexible and highly flexible conductors. With control cable terminal for 1 x 0.75–2.5 mmz or 2 x 0.75–1.5 mmz copper conductor as standard.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN CSA File No. DIHS CSA Class No. 022086 NA Certification 1432-01 Suitable for UL Listed, CSA certified Refer to main component information
–		NZM3-4-XK300 100783		1 set		–
–		NZM3-XK22X21 100784		1 set		–
–		NZM3-4-XK22X21 100785		1 set		–
–		NZM3-XKA1²⁾ 271459		1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit-breakers.	–
–		NZM3-4-XKA1²⁾ 271460		1 set	With control cable terminal for 1 x 0.75–2.5 mmz (18–14 AWG) or 2 x 0.75–1.5 mmz (18–16 AWG) copper cable as standard. Fitting outside switch housing. Use ferrules with flexible and highly flexible conductors. Max. cross section shown can only be connected when flexible and without ferrules. Cover NZM31-4-XKSA must be fitted (included as standard).	–
–		NZM3-XKA2 271461		1 set 		Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN CSA File No. DIHS CSA Class No. 022086 NA Certification 1432-01 Suitable for UL Listed, CSA certified Refer to main component information
–		NZM3-4-XKA2 271462		1 set		–
+NZM3-XKRO 266790		NZM3-XKR 266792		1 set	Part no. suffix and part no. contain parts for a circuit-breaker side at top or bottom for 3 or 4 pole switches.	–
+NZM3-XKRU 266791		–		1 set	0=forfitting at the top U=forfitting at the bottom	–
+NZM3-4-XKRO 266793		NZM3-4-XKR 266795		1 set		–
+NZM3-4-XKRU 266794		–		1 set		–
–		NZM3/4-XSTS 266797		1 set 	Contains for two terminal locations located at top or bottom for 3 or 4 pole circuit-breakers. Included as standard with tunnel terminal. Degree of protection IP1X Height or thickness of connections: 2 mm	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN CSA File No. DIHS CSA Class No. 022086 NA Certification 1432-01 Suitable for UL Listed, CSA certified Refer to main component information
–		NZM-XSTK 266739		1 set 	Contains for two terminal locations located at top or bottom for 3 or 4 pole circuit-breakers. Included as standard with tunnel terminal. Degree of protection IP1X NZM-XSTK cannot be combined with NZM1-4-XIPK IP2X protection against contact with a finger. Height or thickness of connections: 2 mm	–

1.6 Circuit-breakers, switch-disconnectors

Terminals

1

NZM3

	Max. cable connection area	Number of poles	For use with	Part no. Article no. when ordered separately	Price See price list	Std. pack
Cable lug cover						
	–	–	3 pole NZM3, PN3, N(S)3	NZM3-XKSAE 119869		1 set 
	–	–	4 pole NZM3-4, PN3-4, N3-4	NZM3-4-XKSAE 119871		1 set
Cover						
	–	–	3 pole NZM3, PN3, N(S)3	NZM3-XKSA 260045		1 off 
	–	–	4 pole NZM3-4, PN3-4, N3-4	NZM3-4-XKSA 266801		1 off
Phase isolators						
	–	–	3 pole NZM3, PN3, N(S)3	NZM3-XKP 100512		1 set 
	–	–	4 pole NZM3-4, PN3-4, N3-4	NZM3-4-XKP 100513		1 set
Terminal covers, knockout						
	–	–	3 pole NZM3, PN3, N(S)3	NZM3-XKSFA 104642		1 off 
	–	–	4 pole NZM3-4, PN3-4, N3-4	NZM3-4-XKSFA 104643		1 off
Large cover for connection width extension						
	–	–	3 pole NZM3, PN3, N3 + NZM3-XKV70(-2)	NZM3-XKSAV 119858		1 off
	–	–	4 pole NZM3-4, PN3-4, N3-4 + NZM3-4-XKV70	NZM3-4-XKSAV 132675		1 off
IP2X protection against contact with finger						
For box terminal						
	–	–	3 pole NZM3, PN3, N3	NZM3-XIPK 266804		1 set 
	–	–	4 pole NZM3-4, PN3-4, N3-4	NZM3-4-XIPK 266805		1 set
For covers NZM3(-4)-XKSA or NZM3...(C)NA and N(S)3...NA						
	–	–	3 pole NZM3, PN3, N(S)3	NZM3-XIPA 266808		1 set 
	–	–	4 pole NZM3-4, PN3-4, N3-4	NZM3-4-XIPA 266809		1 set
Copper cable lug						
Not UL/CSA approved When using cable lugs without NZM3(-4)-XKSA cover, they must be insulated.						
	185 mm ²	3 and 4 pole	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XKS185 260040		3 off
	240 mm ²	–		NZM3-XKS240 260041		3 off

NZM3

Notes

Information relevant for export to North America



<p>Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Contact protection where cable lugs are used on screw terminals When using insulated conductor material, degree of protection IP2X.</p>	<p>UL/CSA certification not required</p>
<p>Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Insulation/protection against direct contact where cable lugs, bars or tunnel terminals are used. Included in set with tunnel terminals. When using insulated conductor material to degree of protection IP1X.</p>	<p>Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information</p>
<p>Contains parts, including insulating plate for mounting plate, for a terminal located at top or bottom for 3 or 4 pole circuit-breakers. Included with the connection width extension. Cannot be combined with the NZM3(-4)-XKA tunnel terminal, NZM3(-4)-XKR connection on rear. Insulation protection where cable lugs, bars, or flat conductor are used.</p>	<p>Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information</p>
<p>Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Enhanced contact protection (simplified finger protection).</p>	<p>UL/CSA certification not required</p>
<p>Contains parts for a terminal located at top or bottom for 3 pole circuit-breakers. Insulation protection/protection against direct contact for connection of cable lugs or bars to connection width extension. Can also be used for connection width extension NZM3-XKV70 with terminals NZM3-XK300, NZM3-XK22x21 or NZM4-XKA. When using insulated conductor material, degree of protection IP2X.</p>	<p>—</p>
<p>Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit-breakers. Enhanced contact protection to IP2X. Protection when reaching into the cable connection area with the connection of cables in the box terminal with 2 conductors max. cross section 70 mm². Cannot be combined with NZM-XSTK control circuit terminal.</p>	<p>UL/CSA certification not required</p>
<p>Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Enhanced contact protection to IP2X. When fitting to NZM3...-(C)NA or N3...-NA: with 2 conductors max. cross section 70 mm².</p>	<p>UL/CSA certification not required</p>
<p>The part no. contains a cable lug for 3 or 4 pole switch. Special cable lug, narrow style</p>	<p>—</p>




1.6 Circuit-breakers, switch-disconnectors


Terminals

1






NZM4

HPL17096EN

	Space requirement	Rated current ¹⁾ I_n A	Number of poles	For use with	Terminal capacity			Terminal capacity	
					Cable lugs	Terminal capacity mm ²	AWG/kcmil	Copper strip No. of discs × width × disc thickness mm	Copper bar width × thickness mm
Screw terminals									
Threaded stud standard equipment	2-hole	Max. 1600	3 and 4 pole	NZM4(-4) N4(-4) N(S)4	Copper cable lugs	1 x 120-185 4 x 50-185	1 x 250-350 4 x 0-350	(2 x) 10 x 50 x 1.0	(2 x) 50 x 10
Screws			3 pole	NZM4, N(S)4					
			4 pole	NZM4-4, N4-4					
Module plate									
	1-hole	Max. 1250	3 pole	NZM4, N(S)4	Copper cable lugs	1 x 120-300 2 x 95-300	1 x 250-600 2 x 000-600	(2 x) 10 x 40 x 1.0 (2 x) 10 x 50 x 1.0	(2 x) 40 x 10 (2 x) 50 x 10
			4 pole	NZM4-4, N4-4					
	2-hole	Max. 1400	3 pole	NZM4, N(S)4		2 x 95-185 4 x 35-185	2 x 000-350 4 x 2-350	(2 x) 10 x 50 x 1.0	(2 x) 50 x 10
			4 pole	NZM4-4, N4-4					
	2-hole	Max. 1250	3 pole	NZM4, N(S)4	Copper cable lugs	2 x 95-300	2 x 000-600	(2 x) 10 x 40 x 1.0 (2 x) 50 x 1.0	(2 x) 40 x 10 (2 x) 50 x 10
			4 pole	NZM4-4, N4-4					
		Max. 1600	3 pole	NZM4, N(S)4					
			4 pole	NZM4-4, N4-4					







NZM4

Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes	Information relevant for export to North America
			Double hole fitting with M10 threaded stud at 25 mm spacing. Use special cable lug narrow version.	–
NZM4-XKS 127736		1 set 	Double hole fitting with M10 screw at 25 mm spacing. Use special cable lug narrow version.	UL/CSA certification not required
NZM4-4-XKS 127737		1 set		–
NZM4-XKM1 266814		1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. For M10 screws. Can be enlarged for M12 screws. Use special cable lug narrow version. Can be fitted to circuit-breaker with screw terminal. Insulation using cover NZM4(-4)-XKSA or phase divider NZM4(-4)-XKP necessary.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 22086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKM1 266815		1 set		–
NZM4-XKM2 266820		1 set 		Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 22086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKM2 266821		1 set		–
NZM4-XKM2S-1250 284471		1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole circuit-breakers. Insulation using cover NZM4(-4)-XKSA or phase divider NZM4(-4)-XKP necessary.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 22086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKM2S-1250 284472		1 set		–
NZM4-XKM2S-1600 284473		1 set 		Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 22086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKM2S-1600 284474		1 set		–

1.6 Circuit-breakers, switch-disconnectors

Terminals

1 NZM4

	Rated current ¹⁾	Number of poles	For use with	Terminal capacity		AWG/kcmil	Terminal capacity		
	I_n			Cable Cable lugs	Terminal capacity		Copper strip No. of discs × width × disc thickness	Copper bar width × thickness	
	A				mm ²		mm	mm	
Flat cable terminal									
	Max. 1100	3 pole	NZM4, N(S)4	–	–	–	min. 6 x 16 x 0.8 max. (2 x) 10 x 32 x 1.0	–	
		4 pole	NZM4-4, N4-4	–	–	–	min. 6 x 16 x 0.8 max. (2 x) 10 x 32 x 1.0	–	
Tunnel terminal									
	Max. 1100	3 pole	NZM4, N(S)4	Copper cable	1 x 50-240 4 x 50-240	1 x 0-500 4 x 0-500	–	–	
					Aluminium cable				
		4 pole	NZM4-4, N4-4				–	–	
Rear terminal bolts									
	Not UL/CSA approved Max. 1250	3 pole	NZM4, N4	Copper cable	1 x 120-185 2 x 95-185 4 x 35-185	–	(2 x) 10 x 50 x 1.0	(2 x) 50 x 10	
		4 pole	NZM4(-4), N4(-4)	Aluminium cable lugs	1 x 185 2 x 70-185 4 x 50-185				

Notes ¹⁾ The rated operational current values have been determined according to IEC/EN 60947 (switchgear standard). They generally relate to the max. defined cross-sections and are intended as a general guide. The engineering standards which apply in each case must be observed.

NZM4

Part no.
Article no. when
ordered separately

Price
See price
list

Std. pack Notes

Information relevant for export to North America



1

Part no.	Std. pack	Notes	Information relevant for export to North America
NZM4-XKB 266829	1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Conversion kit for circuit-breaker with screw terminal. Insulation using cover NZM4(-4)-XKSA or phase divider NZM4(-4)-XKP necessary.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking NA Certification Request filed for UL and CSA
NZM4-4-XKB 266831	1 set	When the circuit-breaker is installed on a conductive mounting plate, cover NZM4(-4)-XKSA must be used With control circuit terminal for 1 x 0.75-2.5 mm ² or 2x 0.75-1.5 mm ² copper conductors as standard.	—
NZM4-XKA 266836	1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. With control circuit terminal for 1 x 0.75-2.5 mm ² (18-14 AWG) or 2 x 0.75-1.5 mm ² (18-16 AWG) copper cable as standard. Can be fitted to circuit-breaker with screw terminal. Use ferrules with flexible and highly flexible conductors. Cover NZM4(-4)-XKSA must be fitted (included as standard).	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 22086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKA 266837	1 set		—
NZM4-XKR 266842	1 set	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches.	—
NZM4-4-XKR 266843	1 set	Can also be retrofitted: Module plate NZM4...-XKM... or connection width extension NZM4...-XKV...	—

1.6 Circuit-breakers, switch-disconnectors

Terminals

1

NZM4

Space requirement	Rated current ¹⁾	Number of poles	For use with	Terminal capacity			Terminal capacity		
				Cable lugs	Terminal capacity	AWG/kcmil	Copper strip No. of discs × width × disc thickness	Copper bar width × thickness	
	I_n A				mm ²		mm	mm	
Connection width extension									
	Max. 1600	3 pole	NZM4, N(S)4	Copper cable lugs	4 x 300 6 x 95-240	4 x 600 6 x 000-500	max. (2 x) 10 x 80 x 1.0	max. (2 x) 80 x 10	
	Max. 1600	4 pole	NZM4-4, N4-4						
With two threaded studs									
	1600	3 pole	NZM4, N(S)4	Copper cable lugs	4 x 95-300	4 x 500	(2x) 10 x 80 x 1.0	(2 x) 10 x 80	

Notes

¹⁾ The rated operational current values have been determined according to IEC/EN 60947 (switchgear standard). They generally relate to the max. defined cross-sections and are intended as a general guide. The engineering standards which apply in each case must be observed.

NZM4

Part no.
Article no. when
ordered separately

Price
See price
list

Std. pack

Notes

Information relevant for export to North America



1










Part no.	Std. pack	Notes	Product Standards
NZM4-XKV95 281591	1 set 	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Five-hole fitting, for example, for up to nine cable lugs per phase. Can be fitted to circuit-breaker with screw terminal.	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
NZM4-XKV110 281593		Phase isolator supplied. Distance between pole centres with NZM4(-4)-XKV95: 95 mm Installation conditions for current transformer up to 130 mm width with 80 mm bar width. Distance between pole centers with NZM4-XKV110: 107.5 mm Installation conditions for current transformer up to 135 mm width with 80 mm bar width.	UL File No. UL CCN CSA File No. CSA Class No. NA Certification Suitable for
NZM4-4-XKV95 281592	1 set	Distance between pole centers with NZM4-4-XKV120: 122 mm Installation conditions for current transformer up to 164 mm width with 80 mm bar width.	–
NZM4-4-XKV120 281594		4 mm holes predrilled for control cable terminal. NZM4-XKV95 contains hole for large cover NZM4-XKSAV.	–
NZM4-XKV95-2KB 119861	1 set 	Contains parts for a terminal located at top or bottom for 3 pole circuit-breakers. Threaded stud for cable lugs up to 4 × 300 mm ² Can be fitted to circuit-breaker with screw terminal. Phase isolator, insulation plate and 2 control circuit terminals supplied.	

1.6 Circuit-breakers, switch-disconnectors















Terminals

1

NZM4

	Number of poles	For use with	Terminal capacity Connection	Terminal capacity mm ²	AWG/kcmil
Control cable terminals					
	3 and 4 pole	NZM3(-4), PN3, N(S)3(-4)	Screw terminals	1 x 0.75-2.5 2 x 0.75-1.5	1 x 18-14 2 x 18-16
Cover					
	3 pole	NZM4, N(S)4			
	4 pole	NZM4-4, N4-4			
Cover size					
For connection width extension					
	3 pole	NZM4, N(S)4 + NZM4-XXV95(KB)			
Insulation plate					
	3 pole	NZM4, N(S)4 + NZM4-XXV...			
	4 pole	NZM4(-4), N(S)4(-4) + NZM4-4-XXV...			
Terminal covers, knockout					
	3 pole	NZM4, N(S)4			
	4 pole	NZM4-4, N4-4			
Phase isolators					
	3 pole	NZM4 N(S)4			
	4 pole	NZM4-4, N4-4			
Cable lug					
Not UL/CSA approved					
When using cable lugs without NZM3(-4)-XKSA cover, they must be insulated.					
	3 and 4 pole	NZM41-41, NIS141-4)		185 mm ²	
				240 mm ²	

NZM4

Part no. Article no. when	Price See price list	Std. pack	Notes	  Information relevant for export to North America
NZM3/4-XSTS 266797		1 off  		Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM4-XKSA 266846		1 off  	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Contact protection where cable lugs, bars, flat cable terminals or tunnel terminals are used.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKSA 266847		1 off	Included in set with tunnel terminals. When using insulated conductor material, degree of protection IP1X.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E140305 UL CCN DIHS CSA File No. 022086 CSA Class No. 1437-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM4-XKSAV 119876		1 off  	Contains parts for a terminal located at top or bottom for 3 pole circuit-breakers. Insulation protection/protection against direct contact for connection of cable lugs or bars to connection width extension. When using insulated conductor material, degree of protection IP2X.	UL/CSA certification not required
NZM4-XISP 119866		1 off  	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Insulation protection when minimum distance from mounting plate not observed.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking NA Certification Request filed for UL and CSA Suitable for Refer to main component information
NZM4-4-XISP 119867		1 off	Included with the connection width extension.	Suitable for Refer to main component information
NZM4-XKSFA 292193		1 off  	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Increased contact protection with connection of insulated bars or flat band.	UL/CSA certification not required
NZM4-4-XKSFA 292194		1 off		
NZM4-XKP 281595		1 set  	Contains parts for a terminal located at top or bottom for 3 or 4 pole switches. Included with the connection width extension. Cannot be combined with tunnel terminal NZM4(-4)-XKA or rear connection NZM4-XKR. Insulation protection where cable lugs, bars, module plates or tunnel terminals are used.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking UL File No. E31593 UL CCN DIHS CSA File No. 022086 CSA Class No. 1432-01 NA Certification UL Listed, CSA certified Suitable for Refer to main component information
NZM4-4-XKP 281596		1 set		
NZM3-XKS185 260040		3 off	The part no. contains a cable lug for 3 or 4 pole switch. Special cable lug, narrow style	
NZM3-XKS240 260041				

1.6

Circuit-breakers, switch-disconnectors

Terminals

1

NZM4

Rated current For use with

Part no.
Article no. when
ordered separately

Price
See price
list

Std.
pack




Notes

I_n

A

Adapter set N(ZM)4/N(ZM)12

Not UL/CSA approved

Max. I_n	Rated current	Pole	Part no.	Std. pack	Notes	
	Max. 1000	N4	3 pole	N4-XAS12-1000 285609	1 set	Conversion kit from N(ZM)12 to N(ZM)4. With the terminal lugs of the replacement kit all three-pole NZM12 and N12 can be adapted to the connection dimensions of the NZM4 or N4 supplied from model year 1983. 4 pole basic devices, withdrawable units and basic devices with remote operator can not be replaced.
	Max. 1250	N4	3 pole	N4-XAS12-1250 285610	1 set	Contents of replacement kits N(ZM)4-XAS12...: 3 connection extensions on outlet side 3 connection extensions on trip block side 2 mounting brackets 4 fixing screws
	Max. 1600	N4	3 pole	N4-XAS12-1600 285611	1 set	4 phase isolators 6 fixing screws, nuts and washers Paper drilling template in the instructional leaflet (AWA) The replacement kits have the same dimensions as models N(ZM)12..., which correspond to production status 02/97 to the present.
	Max. 1000	NZM4	3 pole	NZM4-XAS12-1000 285612	1 set	Special feature: Prior to 02/97 the N(ZM)12-800 was supplied with 10 mm instead of 8 mm terminal lugs. With these models the customer must determine the device's year of manufacture by measuring the thickness of the terminal lug and order replacement kit N(ZM)4-XAS12-1250.
	Max. 1250	NZM4	3 pole	NZM4-XAS12-1250 285613	1 set	Example: N(ZM)12-800... (1000) > N(ZM)4-XAS12-1000 N(ZM)12-800 before 02/97 > N(ZM)4-XAS12-1250 N(ZM)12-1250 > N(ZM)4-XAS12-1250 N(ZM)12-1600 > N(ZM)4-XAS12-1600
	Max. 1600	NZM4	3 pole	NZM4-XAS12-1600 285614	1 set	Addition for devices constructed prior to 1983! Here the replacement kit for switch-disconnectors can be used in full. For circuit-breakers with "long" ZM design, the adapter fit only at the top! At the bottom the devices are about 65 mm longer and the lower connection is about 26 mm deeper. Consequently the bottom adapters are too short and the heights do not correspond.
	Max. 1250	NZM4, N4	3 pole	NZM4-XAS14-1250 283291	1 set	Conversion kit for NZM14 to NZM4. Same connections as NZM14. Contains for both sides of switch. 3 connection extensions on outlet side 3 connection extensions on trip block side. 1 long shroud for the outlet side
	1600	NZM4, N4	3 pole	NZM4-XAS14-1600 283292	1 set	Paper drilling template in the instructional leaflet (AWA) Cannot be combined with the module plate (NZM4-XKM...), flat cable terminal (NZM4-XKB), connection width extension (NZM4-XKV...), tunnel terminal (NZM4-XKA), connection on rear (NZM4-XKR) and withdrawable unit (NZM4-XAV...).

NZM1, NZM2, NZM3, NZM4

	For use with	Number of poles	Part no. Article no.	Price See Price List	Std. pack	Notes
--	--------------	-----------------	-------------------------	----------------------------	--------------	-------

Plug-in units


For circuit-breakers NZM and switch-disconnectors N
Not UL/CSA approved
Not for $U_b > 690$ V

B = box terminals


S = screw terminals

For further terminal types
see accessories

Plug-in socket

	Completion through switches with plug-in insert NZM...-SVE...	NZM1 N1	3 pole	NZM1-XSVS 109777	B	1 off	I_{max} at: 20°C: 125 A (NZM1) 70°C: 100 A (NZM1) Mounting position: vertical, 90° right, 90° left Order control circuit plug unit separately!
		NZM2 N2	3 pole	NZM2-XSVS 266699	B	1 off	I_{max} at: 20°C: 250 A
		NZM2-4 N2-4	4 pole	NZM2-4-XSVS 266700	S	1 off	40°C: 230 A (NZM...2-...) 250 A (NZM...2-E...) Mounting position: vertical, 90° right, 90° left Order control circuit plug unit separately!

Control circuit plug unit

	-	NZM1, N1 NZM2(-4) N2(-4)	For auxiliary contact, shunt/over-voltage release	NZM2-XSVHI 266705	-	1 off	10 terminals
	-	NZM2(-4) N2(-4)	For remote operator	NZM2-XSVR 266706	-	1 off	


	For use with	Number of poles	Part no. suffix Article no. for order with basic	Price See Price List	Std. pack	Part no. Article no. for separate order	Price See Price List	Std. pack	Notes
--	--------------	-----------------	---	----------------------------	--------------	--	----------------------------	--------------	-------

Withdrawable unit

For circuit-breakers NZM and switch-disconnectors N
Not UL/CSA approved
Not for $U_b > 690$ V
Socket base

For switches with withdrawable carrier.


Also for reserved compartments.

	NZM3 N3	3 pole	-			NZM3-XAVS 266711		S	1 off	I_{max} at: 20°C: 605 A (NZM3), 1600 A (NZM4) 40°C: 550 A (NZM3), 1500 A (NZM4)
	NZM3-4 N3-4	4 pole	-			NZM3-4-XAVS 266712		S	1 off	Mounting position: NZM3: vertical, 90° left NZM4: vertical
	NZM4 N4	3 pole	-			NZM4-XAVS 266713		S	1 off	
	NZM4-4 N4-4	4 pole	-			NZM4-4-XAVS 266714		S	1 off	3 positions: Connected, test, disconnected

Withdrawable carrier

Suitable for socket base

Only in combination with switch

	NZM4 N4	3 pole	+NZM4-XAVE 266717		1 off	-		-		Position indication is mechanical with pointers. Additional electrical indication with auxiliary contacts possible. One N/O or NC contact M22-(C)K01 or M22-(C)K10 each per position. Alternatively also double contacts M22-CK...
	NZM4-4	4 pole	+NZM4-4-XAVE		1 off	-		-		Complete with control circuit plug unit.
	N4-4		266718							

All auxiliary contact (HIA, HIN, HIV) and shunt release connections to the control circuit plug unit are already present.

Maximum configuration: 3 contacts HIN, 2 contacts HIA, 2 contacts HIV
Cannot be combined with adapter set NZM4/NZM14(NZM4-XSAS14-...) or N(ZM)4/N(ZM)12.

1.6

Circuit-breakers, switch-disconnectors

Auxiliary contacts with screw terminals/spring terminal

1

NZM1, M22-...

For use with

Contact configuration:

☉ = safety function by positive opening according to IEC/EN 60947-5-1

N/O = normally open contact NC ☉ = normally closed contact

Contact sequences

Part no.
Article no. when ordered separately









Price
See price list

Std. pack

Auxiliary contacts











Standard auxiliary contacts (HIN)¹⁾

Switches with the main contacts. Used for indicating and interlocking tasks.

	Single contact	NZM1(-4), 2(-4), 3(-4), 4(-4)	1 N/O			M22-K10 216376	20 off 	
		PN1(-4), 2(-4), 3(-4)						
		N(S)1(-4), 2(-4), 3(-4), 4(-4)	1 NC ☉		M22-K01 216378			
	Double contact	NZM1(-4), 2(-4), 3(-4), 4(-4)	1 N/O	1 NC ☉				
		PN1(-4), 2(-4), 3(-4)						
		N(S)1(-4), 2(-4), 3(-4), 4(-4)	2 NC ☉					
			2 N/O					










Early-make auxiliary contact[®]

For interlocking and load shedding circuits, as well as for early make of the undervoltage release in main switch/emergency switching off applications

	With clamp terminal on left switch side.	NZM1(-4) PN1(-4) N(S)1(-4)	2 N/O	–		NZM1-XHIV 259426	1 off 
	With clamp terminal on right switch side.		2 N/O	–		NZM1-XHIVR 292195	
	With 3 m connection cable instead of screw connection.		2 N/O	–		NZM1-XHIVL 259432	
	–	NZM2(-4), 3(-4) PN2(-4), 3(-4) N(S)2(-4), 3(-4)	2 N/O	–		NZM2/3-XHIV 259430	
		NZM4(-4) N(S)4(-4)	2 N/O	–		NZM4-XHIV 266172	

Trip indicating auxiliary contact (HIA), (HIAFI)¹⁾

General trip indication "+", when tripped by shunt release, overload release, short-circuit release or earth-fault release due to fault current.

	Single contact	NZM1(-4), 2(-4), 3(-4), 4(-4)	1 N/O			M22-K10 216376	20 off 	
		PN1(-4), 2(-4), 3(-4)						
		N(S)1(-4), 2(-4), 3(-4), 4(-4)	1 NC ☉		M22-K01 216378	20 off 		
	Double contact	NZM1(-4), 2(-4), 3(-4), 4(-4)	1 N/O	1 NC ☉				
		PN1(-4), 2(-4), 3(-4)						
		N(S)1(-4), 2(-4), 3(-4), 4(-4)	2 NC ☉					
			2 N/O					

Information relevant for export to North America




¹⁾ Product Standards IEC/EN 60947-5; UL 508; CSA-C22.2
No. 14-05; CSA-C22.2 No. 94-91; CE marking
UL File No. E29184
UL CCN NKCR

CSA File No. 012528
CSA Class No. 3211-03
NA Certification UL Listed, CSA certified
Degree of Protection UL/CSA Part no.:

NZM1, M22-...


HPL17107EN

1

Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes	Notes
M22-CK10 216384	20 off 		The following applies for the std. pack: M22-(C)K... : Std. pack = 20 off	The following can be clipped into the switch: <ul style="list-style-type: none"> • NZM1: one standard auxiliary contact • NZM2: up to two standard auxiliary contacts M22-(C)K... • NZM3: up to three standard auxiliary contacts M22-(C)K... • NZM4: up to three standard auxiliary contacts M22-(C)K... Any combinations of the auxiliary contact types are possible. Marking on switch: HIN On combination with remote operator NZM-XR... the right mounting location of standard auxiliary contact HIN can be fitted only with individual contacts.
M22-CK01 216385				
M22-CK11 107940				
M22-CK02 107899				
M22-CK20 107898				

Not in conjunction with undervoltage release NZM...-XU... or shunt release NZM...-XA...
Early make with switch on and switch off (manual actuation): approx. 20 ms

Not in conjunction with undervoltage release NZM...-XU..., shunt release NZM...-XA... or remote operator NZM...-XR...
Early make (manual operation): approx. 20...90 ms



M22-CK10
216384


20 off


The following applies for the std. pack: M22-(C)K... : Std. pack = 20 off

The following can be clipped into the switch:

- NZM1 - one trip-indicating auxiliary switch
- NZM2 - one trip-indicating auxiliary switch M22-(C)K...
- NZM3 - one trip-indicating auxiliary switch M22-(C)K...
- NZM4 - up to two trip-indicating auxiliary switches M22-(C)K...

Any combinations of the auxiliary contact types are possible.
Not in combination with switch-disconnector PN...



M22-CK01
216385

20 off


M22-CK11
107940

20 off


M22-CK02
107899

20 off


M22-CK20
107898

20 off


Marking on switch: HIA
Labeling in residual-current block: HIAFI.
If the trip-indicating auxiliary contacts are used in the residual-current block, the NC contacts operates as N/O contacts and the N/O contact operates as an NC contact.

²⁾ Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No. E140305
UL CCN DIHS

CSA File No. 022086
CSA Class No. 1437-01
NA Certification UL Listed, CSA certified

1.6

Circuit-breakers, switch-disconnectors

Undervoltage releases

1

NZM1


For use with	Rated control voltage U_s V	Part no. Article no. for separate order	Price See price list	Std. pack	Notes
--------------	-------------------------------------	---	----------------------------	-----------	-------

Undervoltage releases

Without auxiliary contacts

Non-delayed disconnection of circuit-breaker NZM or switch-disconnector N when control voltage drops below 35 – 70% U_s .

For use with emergency switching off devices in conjunction with emergency switching off button.




With clamp terminal on left switch side.

NZM1(-4), N(S)1(-4)	24 V 50/60 Hz	NZM1-XU24AC 259434	1 off
	48 V 50/60 Hz	NZM1-XU48AC 259436	
	60 V 50/60 Hz	NZM1-XU60AC 259438	
	110 V-130 V 50/60 Hz	NZM1-XU110-130AC 259440	
	208 V-240 V 50/60 Hz	NZM1-XU208-240AC 259442	
	380 V-440 V 50/60 Hz	NZM1-XU380-440AC 259444	
	480 V-525 V 50/60 Hz	NZM1-XU480-525AC 259446	
	600 V 50/60 Hz	NZM1-XU600AC 259448	
	12 V DC	NZM1-XU12DC 259450	
	24 V DC	NZM1-XU24DC 259452	
	110 V-130 V DC	NZM1-XU110-130DC 259458	
	220 V-250 V DC	NZM1-XU220-250DC 259460	

When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented.

Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...



With 3 m connection cable instead of screw terminal.

NZM1(-4), N(S)1(-4)	24 V 50/60 Hz	NZM1-XUL24AC 259462	1 off
	110 V-130 V 50/60 Hz	NZM1-XUL110-130AC 259468	
	208 V-240 V 50/60 Hz	NZM1-XUL208-240AC 259471	
	380 V-440 V 50/60 Hz	NZM1-XUL380-440AC 259473	
	480 V-525 V 50/60 Hz	NZM1-XUL480-525AC 259475	
	600 V 50/60 Hz	NZM1-XUL600AC 259477	
	12 V DC	NZM1-XUL12DC 259479	
	24 V DC	NZM1-XUL24DC 259481	
	110 V-130 V DC	NZM1-XUL110-130DC 259487	
	220 V-250 V DC	NZM1-XUL220-250DC 259489	

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

NZM2/3..., NZM4

For use with

Rated control voltage
 U_s
V

Part no.
Article no. when ordered
separately

Price
See price
list

Std. pack

Notes


1

Undervoltage releases

Without auxiliary
contacts

Non-delayed disconnection of circuit-breaker NZM or switch-
disconnecter N when control voltage drops below 35 – 70% U_s .

For use with emergency switching off devices in conjunction with
emergency switching off button



NZM2(-4), N(S)2(-4)
NZM3(-4), N(S)3(-4)

24 V 50/60 Hz

NZM2/3-XU24AC
259491

1 off

When the undervoltage release is
de-energized, accidental contact with
the main switches of the switch during
attempts to switch on is reliably
prevented.

48 V 50/60 Hz

NZM2/3-XU48AC
259493

60 V 50/60 Hz

NZM2/3-XU60AC
259495

110 V-130 V 50/60 Hz

NZM2/3-XU110-130AC
259497

208 V-240 V 50/60 Hz

NZM2/3-XU208-240AC
259499

380 V-440 V 50/60 Hz

NZM2/3-XU380-440AC
259501

480 V-525 V 50/60 Hz

NZM2/3-XU480-525AC
259503

600 V 50/60 Hz

NZM2/3-XU600AC
259505

12 V DC

NZM2/3-XU12DC
259507

24 V DC


NZM2/3-XU24DC
259509

110 V-130 V DC

NZM2/3-XU110-130DC
259515

220 V-250 V DC

NZM2/3-XU220-250DC
259517



NZM4(-4), N(S)4(-4)

24 V 50/60 Hz

NZM4-XU24AC
266189

1 off

48 V 50/60 Hz

NZM4-XU48AC
266190

60 V 50/60 Hz

NZM4-XU60AC
266191

110 V-130 V 50/60 Hz

NZM4-XU110-130AC
266192

208 V-240 V 50/60 Hz

NZM4-XU208-240AC
266193

380 V-440 V 50/60 Hz

NZM4-XU380-440AC
266194

480 V-525 V 50/60 Hz

NZM4-XU480-525AC
266195

600 V 50/60 Hz

NZM4-XU600AC
266196

12 V DC

NZM4-XU12DC
266203

24 V DC

NZM4-XU24DC
266204

110 V-130 V DC

NZM4-XU110-130DC
266207

220 V-250 V DC

NZM4-XU220-250DC
266208

Information relevant for export to North America



Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification

UL489;CSA-C22.2 No. 5-09; IEC60947, CE marking
E140305
DIHS
022086
1437-01
UL Listed, CSA certified

1.6

Circuit-breakers, switch-disconnectors

Undervoltage releases


NZM1, NZM2/3

1


For use with	Rated control voltage U_s V	Part no. Article no. for separate order	Price See price list	Std. pack	Notes
--------------	-------------------------------------	--	-------------------------	-----------	-------

Undervoltage releases


With two early-make auxiliary contacts. For interlocking and load-shedding circuits, as well as for early-make of the undervoltage release in main-switch applications. For use with emergency switching off devices in conjunction with emergency switching off button.



With clamp terminal on left switch side.	NZM1(-4), N(S)1(-4)	24 V 50/60 Hz	NZM1-XUHIV24AC 259531	1 off 	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early-make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms. Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...XHIV... or shunt release NZM...XA...
		48 V 50/60 Hz	NZM1-XUHIV48AC 259533		
		60 V 50/60 Hz	NZM1-XUHIV60AC 259535		
		110 V-130 V 50/60 Hz	NZM1-XUHIV110-130AC 259537		
		208 V-240 V 50/60 Hz	NZM1-XUHIV208-240AC 259539		
		380 V-440 V 50/60 Hz	NZM1-XUHIV380-440AC 259541		
		480 V-525 V 50/60 Hz	NZM1-XUHIV480-525AC 259543		
		12 V DC	NZM1-XUHIV12DC 259545		
		24 V DC	NZM1-XUHIV24DC 259547		
		110 V-130 V DC	NZM1-XUHIV110-130DC 259553		
220 V-250 V DC	NZM1-XUHIV220-250DC 259555				



With 3 m connection cable instead of screw connection.	NZM1(-4), N(S)1(-4)	24 V 50/60 Hz	NZM1-XUHIVL24AC 259557	1 off 	
		110 V-130 V 50/60 Hz	NZM1-XUHIVL110-130AC 259563		
		208 V-240 V 50/60 Hz	NZM1-XUHIVL208-240AC 259565		
		380 V-440 V 50/60 Hz	NZM1-XUHIVL380-440AC 259567		
		480 V-525 V 50/60 Hz	NZM1-XUHIVL480-525AC 259569		
		12 V DC	NZM1-XUHIVL12DC 259571		
		24 V DC	NZM1-XUHIVL24DC 259573		
		110 V-130 V DC	NZM1-XUHIVL110-130DC 259579		
		220 V-250 V DC	NZM1-XUHIVL220-250DC 259581		



	NZM2(-4), N(S)2(-4) NZM3(-4), N(S)3(-4)	24 V 50/60 Hz	NZM2/3-XUHIV24AC 259583	1 off 	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early-make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms. Cannot be used in conjunction with remote operator NZM...XR.... Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...XHIV... or shunt release NZM...XA....
		48 V 50/60 Hz	NZM2/3-XUHIV48AC 259585		
		60 V 50/60 Hz	NZM2/3-XUHIV60AC 259587		
		110 V-130 V 50/60 Hz	NZM2/3-XUHIV110-130AC 259589		
		208 V-240 V 50/60 Hz	NZM2/3-XUHIV208-240AC 259591		
		380 V-440 V 50/60 Hz	NZM2/3-XUHIV380-440AC 259594		
		480 V-525 V 50/60 Hz	NZM2/3-XUHIV480-525AC 259598		
		12 V DC	NZM2/3-XUHIV12DC 259600		
		24 V DC	NZM2/3-XUHIV24DC 259602		
		110 V-130 V DC	NZM2/3-XUHIV110-130DC 259608		
		220 V-250 V DC	NZM2/3-XUHIV220-250DC 259610		


NZM1, NZM2/3..., NZM4

For use with

Rated operating voltage
 U_s
V

Part no. Article no. when ordered separately
Price See price list separately
Std. pack
Notes



1



Undervoltage releases

With two early-make auxiliary contacts
For interlocking and load-shedding circuits, as well as for early-make of the undervoltage release in main-switch applications.
For use with emergency switching off devices in conjunction with emergency switching off button.



For use with	Rated operating voltage U_s V	Part no. Article no. when ordered separately	Price See price list separately	Std. pack	Notes
NZM4(-4), N(S)4(-4)	24 V 50/60 Hz	NZM4-XUHIV24AC 266217		1 off	When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented. Early make of auxiliary contacts on switching on (manual operation): approx. 90 ms Cannot be used in conjunction with remote operator NZM...-XR... Undervoltage release cannot be installed together with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
	48 V 50/60 Hz	NZM4-XUHIV48AC 266218			
	60 V 50/60 Hz	NZM4-XUHIV60AC 266219			
	110 V-130 V 50/60 Hz	NZM4-XUHIV110-130AC 266220			
	208 V-240 V 50/60 Hz	NZM4-XUHIV208-240AC 266221			
	380 V-440 V 50/60 Hz	NZM4-XUHIV380-440AC 266222			
	480 V-525 V 50/60 Hz	NZM4-XUHIV480-525AC 266223			
	12 V DC	NZM4-XUHIV12DC 266231			
	24 V DC	NZM4-XUHIV24DC 266232			
	110 V-130 V DC	NZM4-XUHIV110-130DC 266235			
	220 V-250 V DC	NZM4-XUHIV220-250DC 266236			



With 2 separate early-make auxiliary contacts

With 3 m connection cable instead of screw terminal.

For use with	Rated operating voltage U_s V	Part no. Article no. when ordered separately	Price See price list separately	Std. pack	Notes
NZM1(-4), N(S)1(-4)	24 V 50/60 Hz	NZM1-XUHIV20L24AC 259612		1 off	When the undervoltage release is de-energized, accidental contact with the main switches of the switch during attempts to switch on is safely prevented. Early make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms Cannot be used in conjunction with remote operator NZM...-XR... Undervoltage release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
	110 V-130 V 50/60 Hz	NZM1-XUHIV20L110-130AC 259620			
	208 V-240 V 50/60 Hz	NZM1-XUHIV20L208-240AC 259622			
	380 V-440 V 50/60 Hz	NZM1-XUHIV20L380-440AC 259624			
	24 V DC	NZM1-XUHIV20L24DC 259630			



Contacts 3.23 and 3.24 with separate 3 m connection cables.

For use with	Rated operating voltage U_s V	Part no. Article no. when ordered separately	Price See price list separately	Std. pack	Notes
NZM2(-4), N(S)2(-4)	24 V 50/60 Hz	NZM2/3-XUHIV2024AC 259640		1 off	When the undervoltage release is de-energized, accidental contact with the main switches of the switch during attempts to switch on is safely prevented. Early make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms Cannot be used in conjunction with remote operator NZM...-XR... Undervoltage release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
NZM3(-4), N(S)3(-4)	110 V-130 V 50/60 Hz	NZM2/3-XUHIV20110-130AC 259648			
	208 V-240 V 50/60 Hz	NZM2/3-XUHIV20208-240AC 259651			
	380 V-440 V 50/60 Hz	NZM2/3-XUHIV20380-440AC 259653			
	24 V DC	NZM2/3-XUHIV2024DC 259659			

Information relevant for export to North America



Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified



1.6 Circuit-breakers, switch-disconnectors

Undervoltage releases

1

NZM1, NZM2/3..., NZM4

For use with	Rated control voltage	Part no.	Price	Std. pack	Notes
	U_c V	Article no. when ordered separately	See price list		





Undervoltage releases

With 2 separate early-make auxiliary contacts

For use with emergency switching off devices in conjunction with emergency switching off button.



Coil connections wired to clamp terminals, auxiliary contact connections with 3 m loose connection cables.

NZM1(-4), N(S)1(-4)	24 V 50/60 Hz	NZM1-XUHIV20KL24AC 284388	1 off		When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is reliably prevented.
	110 V-130 V 50/60 Hz	NZM1-XUHIV20KL110-130AC 284389			
	208 V-240 V 50/60 Hz	NZM1-XUHIV20KL208-240AC 284400			
	24 V DC	NZM1-XUHIV20KL24DC 284387			





Coil connections with 3 m loose connection cables, auxiliary contact connections wired to clamp terminals.

NZM1(-4), N(S)1(-4)	24 V 50/60 Hz	NZM1-XUHIV20LK24AC 284402	1 off		Early make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms
	110 V-130 V 50/60 Hz	NZM1-XUHIV20LK110-130AC 284403			
	208 V-240 V 50/60 Hz	NZM1-XUHIV20LK208-240AC 284404			Cannot be used in conjunction with remote operator NZM...-XR...
	24 V DC	NZM1-XUHIV20LK24DC 284401			



NZM2(-4), N(S)2(-4)	24 V 50/60 Hz	NZM2/3-XUHIV20LK24AC 285291	1 off		Undervoltage release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
NZM3(-4), N(S)3(-4)	110 V-130 V 50/60 Hz	NZM2/3-XUHIV20LK110-130AC 284407			
	208 V-240 V 50/60 Hz	NZM2/3-XUHIV20LK208-240AC 284408			
	24 V DC	NZM2/3-XUHIV20LK24DC 284405			




Contacts 3.23 and 3.24 with separate 3 m connection cables.

NZM4(-4), N(S)4(-4)	24 V 50/60 Hz	NZM4-XUHIV2024AC 266244	1 off		
	110 V-130 V 50/60 Hz	NZM4-XUHIV20110-130AC 266247			
	208 V-240 V 50/60 Hz	NZM4-XUHIV20208-240AC 266248			
	380 V-440 V 50/60 Hz	NZM4-XUHIV20380-440AC 266249			
	24 V DC	NZM4-XUHIV2024DC 266258			

Information relevant for export to North America



Product Standards	UL489;CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified



For use with

Part no.
Article no.
when ordered
separately

Price
See price
list

Std. pack

Notes

Undervoltage releases, off-delayed

Combination of separate delay unit and special releases. For use with emergency switching off devices in conjunction with emergency switching off button. Not UL/CSA approved

Delay unit

Voltage dips of less than 0.06 – 16 s do not cause disconnection of the NZM circuit-breaker or N switch-disconnector.

NZM1(-4), 2(-4), 3(-4), 4(-4)	UVU-NZM	1 off	Delay time can be set from 70 ms – 4 s. With additional external capacitor: • 30,000µF ≅35 V up to 8 s • 90,000µF ≅35 V up to 16 s A special release is required. Cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA... Delay unit for separate installation (mounting: top-hat rail or screws). For other operating voltages use a control transformer.
N(S)1(-4), 2(-4), 3(-4), 4(-4)	260154		

Special trip block

For combination with separate delay unit

Without auxiliary contacts

NZM1 with 3 m loose connection cables instead of screw terminal, NZM2, 3, and 4 with screw terminals

NZM1(-4)	NZM1-XUVL	1 off	Delay unit UVU-NZM is additionally required. Cannot be installed simultaneously with separate early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA...
N(S)1(-4)	271607		
NZM2(-4), N(S)2(-4)	NZM2/3-XUV		
NZM3(-4), N(S)3(-4)	259527		
NZM4(-4)	NZM4-XUV		
N(S)4(-4)	266588		



With two early-make auxiliary contacts

NZM1(-4)	NZM1-XUVHIVL	1 off	Cannot be used in conjunction with remote operator NZM...-XR... Delay unit UVU-NZM is additionally required. Cannot be installed simultaneously with separate early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XA... NZM1, 2, 3: Early make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms. NZM4: Early make of auxiliary contacts on switching on (manual operation): approx. 90 ms.
N(S)1(-4)	271608		
NZM2(-4), N(S)2(-4)	NZM2/3-XUVHIV		
NZM3(-4), N(S)3(-4)	259684		
NZM4(-4)	NZM4-XUVHIV		
N(S)4(-4)	266596		

With two independently operating early-make auxiliary contacts

NZM1 with 3 m separate connection cables instead of screw terminal, NZM2, 3, 4 with screw terminal, contact 3.23 and 3.24 with 3 m separate connection cables.

NZM1(-4)	NZM1-XUVHIV20L	1 off	
N(S)1(-4)	271609		
NZM2(-4), N(S)2(-4)	NZM2/3-XUVHIV20		
NZM3(-4), N(S)3(-4)	259688		
NZM4(-4)	NZM4-XUVHIV20		
N(S)4(-4)	266604		



1.6

Circuit-breakers, switch-disconnectors

Shunt releases

1

NZM1, NZM2/3, NZM4

For use with


Rated control voltage
 U_s
V

Part no.
Article no. when ordered

Price
See price

Std. pack

Notes



Shunt releases

Without auxiliary contacts

Switches are tripped by a voltage pulse or by the application of uninterrupted voltage.

With clamp terminal on left switch side.

12 V AC/DC

NZM1-XA12AC/DC
259706

1 off

When the shunt release is live, contact with the switch's main contacts on switching on is reliably prevented.

24 V AC/DC

NZM1-XA24AC/DC
259708

Undervoltage releases cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or shunt release NZM...-XU...

48 V AC/DC

NZM1-XA48AC/DC
259720

60 V AC/DC

NZM1-XA60AC/DC
259722

110 V-130 V AC/DC


NZM1-XA110-130AC/DC
259724

208 V-250 V AC/DC

NZM1-XA208-250AC/DC
259726

380 V-440 V AC/DC

NZM1-XA380-440AC/DC
259728



With 3 m connection cable instead of screw terminal.

NZM1(-4), N(S)1(-4)

12 V AC/DC

NZM1-XAL12AC/DC
259734

1 off

24 V AC/DC

NZM1-XAL24AC/DC
259736

110 V-130 V AC/DC

NZM1-XAL110-130AC/DC
259742

208 V-250 V AC/DC

NZM1-XAL208-250AC/DC
259744

380 V-440 V AC/DC

NZM1-XAL380-440AC/DC
259746



NZM2(-4), N(S)2(-4)
NZM3(-4), N(S)3(-4)

12 V AC/DC

NZM2/3-XA12AC/DC
259752

1 off

24 V AC/DC

NZM2/3-XA24AC/DC
259754

48 V AC/DC

NZM2/3-XA48AC/DC
259756

60 V AC/DC

NZM2/3-XA60AC/DC
259758

110 V-130 V AC/DC


NZM2/3-XA110-130AC/DC
259760

208 V-250 V AC/DC

NZM2/3-XA208-250AC/DC
259763

380 V-440 V AC/DC

NZM2/3-XA380-440AC/DC
259766



NZM4(-4), N(S)4(-4)

12 V AC/DC

NZM4-XA12AC/DC
266446

1 off

When the shunt release is live, contact with the switch's main contacts on switching on is reliably prevented.

24 V AC/DC

NZM4-XA24AC/DC
266447

Early make of auxiliary contact on switching on (manual operation): approx. 90 ms. Cannot be used in conjunction with remote operator NZM...-XR...

48 V AC/DC

NZM4-XA48AC/DC
266448

Undervoltage release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or undervoltage release NZM...-XU...

60 V AC/DC

NZM4-XA60AC/DC
266449

110 V-130 V AC/DC

NZM4-XA110-130AC/DC
266450

208 V-250 V AC/DC

NZM4-XA208-250AC/DC
266451

380 V-440 V AC/DC

NZM4-XA380-440AC/DC
266452



Information relevant for export to North America




Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01
NA Certification	UL Listed, CSA certified

NZM...-XA...

With screw terminal

For use with	Part no. Article no.	Price See price list	Std. pack	Notes
				With screw terminal



Shunt releases

Capacitor unit 230 V 50/60 Hz
in conjunction with shunt release
NZM...-XA208-250 AC/DC

Enclosure: degree of protection IP20
Not UL/CSA approved



Part no. Article no.	Price See price list	Std. pack	Notes
NZM1(-4), N(S)1(-4)	NZM-XCM 229413	1 off	Enables the reliable use of circuit-breakers as mesh network circuit-breakers in the range from 0... with constant switch-off time of 40 ms. If the mains voltage is absent, the installed capacitor supplies power for actuating the shunt release for at least 12 hours. The capacitor unit is arranged independently of the circuit-breaker. Note on engineering: Connect a standard auxiliary contact (HIN) as N/O in series with the coil of the shunt release! Standard auxiliary contact not included as standard.
NZM2(-4), N(S)2(-4)			
NZM3(-4), N(S)3(-4)			
NZM4(-4), N(S)4(-4)			

Part no. Article no.	Price See price list	Std. pack	Notes
			With screw terminal

Shunt releases



For mesh network circuit-breakers
For intermittent operation
Maximum On-time = 1 s
Operating range 10-110 % U_s
Not UL/CSA approved

Rated control voltage
230 V AC
For use with
NZM3(-4), N3(-4) and NZM4(-4), N4(-4)
Cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or undervoltage release NZM...-XU...
Intermittent operation guaranteed by series connection of a make contact M22-(C)K10.
The maximum duty factor of the shunt releases for mesh network circuit-breakers is 1 s.




Without auxiliary contacts	NZM3-XA-230AC-MNS 274097	1 off
----------------------------	------------------------------------	-------

With early-make auxiliary contact	NZM3-XAHIV-230AC-MNS 274141	1 off
-----------------------------------	---------------------------------------	-------



Without auxiliary contacts	NZM4-XA-230AC-MNS 274138	
----------------------------	------------------------------------	--

With early-make auxiliary contact	NZM4-XAHIV-230AC-MNS 274143	1 off
-----------------------------------	---------------------------------------	-------

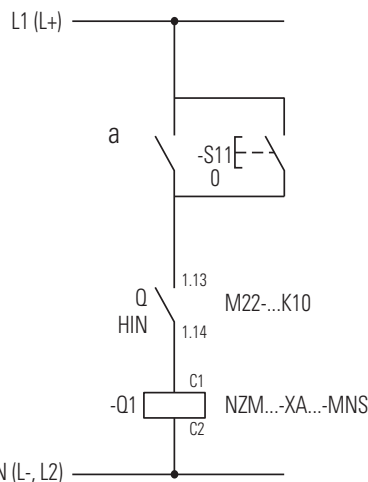

NZM...-XAHIV:

Cannot be used in conjunction with remote operator
NZM...-XR...

NZM3: Early make of auxiliary contact
on switching on and off (manual operation):
approx. 20 ms.

NZM4: Early make of auxiliary contact on switching on
(manual operation): approx. 90 ms.

- ① Reverse power relay contact from mesh network relay
- S11 Remote off
- q Standard auxiliary contacts
- Q1 Shunt releases

1.6

Circuit-breakers, switch-disconnectors

Shunt releases

NZM1, NZM2/3, NZM4



1

For use with	Rated control voltage U_s V	Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes
--------------	-------------------------------------	---	-------------------------	-----------	-------

Shunt releases

With early-make auxiliary contact

Not in combination with remote operator.





With clamp terminal on left switch side.

NZM1(-4), N(S)1(-4)	12 V AC/DC	NZM1-XAHIV12AC/DC 259772	1 off
	24 V AC/DC	NZM1-XAHIV24AC/DC 259774	
	48 V AC/DC	NZM1-XAHIV48AC/DC 259776	
	60 V AC/DC	NZM1-XAHIV60AC/DC 259778	
	110 V-130 V AC/DC	NZM1-XAHIV110-130AC/DC 259780	
	208 V-250 V AC/DC	NZM1-XAHIV208-250AC/DC 259782	
	380 V-440 V AC/DC	NZM1-XAHIV380-440AC/DC 259784	

1 off



When the shunt release is live, contact with the switch's main contacts on switching on is reliably prevented. Early make of auxiliary contact on switching on and off (manual operation): approx. 20 ms. Undervoltage release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or undervoltage release NZM...-XU...



With 3 m connection cable instead of screw connection



NZM1(-4), N(S)1(-4)	12 V AC/DC	NZM1-XAHIVL12AC/DC 259790	1 off
	24 V AC/DC	NZM1-XAHIVL24AC/DC 259792	
	110 V-130 V AC/DC	NZM1-XAHIVL110-130AC/DC 259798	
	208 V-250 V AC/DC	NZM1-XAHIVL208-250AC/DC 259800	
	380 V-440 V AC/DC	NZM1-XAHIVL380-440AC/DC 259802	

1 off



NZM2(-4), N(S)2(-4) NZM3(-4), N(S)3(-4)	12 V AC/DC	NZM2/3-XAHIV12AC/DC 259808	1 off
	24 V AC/DC	NZM2/3-XAHIV24AC/DC 259810	
	48 V AC/DC	NZM2/3-XAHIV48AC/DC 259812	
	60 V AC/DC	NZM2/3-XAHIV60AC/DC 259814	
	110 V-130 V AC/DC	NZM2/3-XAHIV110-130AC/DC 259816	
	208 V-250 V AC/DC	NZM2/3-XAHIV208-250AC/DC 259818	
	380 V-440 V AC/DC	NZM2/3-XAHIV380-440AC/DC 259820	

1 off



NZM4(-4), N(S)4(-4)	12 V AC/DC	NZM4-XAHIV12AC/DC 266470	1 off
	24 V AC/DC	NZM4-XAHIV24AC/DC 266471	
	48 V AC/DC	NZM4-XAHIV48AC/DC 266472	
	60 V AC/DC	NZM4-XAHIV60AC/DC 266473	
	110 V-130 V AC/DC	NZM4-XAHIV110-130AC/DC 266474	
	208 V-250 V AC/DC	NZM4-XAHIV208-250AC/DC 266475	
	380 V-440 V AC/DC	NZM4-XAHIV380-440AC/DC 266476	

1 off

When the shunt release is live, contact with the switch's main contacts on switching on is reliably prevented. Early make of auxiliary contact on switching on (manual operation): approx. 90 ms. Cannot be used in conjunction with remote operator NZM...-XR.... Undervoltage release cannot be installed simultaneously with early-make auxiliary contact NZM...-XHIV... or undervoltage release NZM...-XU...

Information relevant for export to North America



Product Standards
UL File No. E140305
UL CCN DIHS
CSA File No. Q22086
CSA Class No. 1437-01
NA Certification
UL Listed, CSA certified

1.6

Circuit-breakers, switch-disconnectors

Door coupling rotary handles

NZM1, NZM2, NZM3, NZM4

1

Standard

Product view

For use with

Part no.
Article no.
when
ordered
separately

Price
See price
list

Std. pack

Notes


Door coupling rotary handles

Complete including rotary drive and coupling parts

An additional extension shaft is necessary with the NZM... - XT(V)D(V)(R)(-60) part numbers.

Degree of protection IP66/UL/CSA type 4X, 12

Standard, black/grey



Lockable in 0 position on handle with up to 3 padlocks. With door interlock.

NZM1(-4), PN1(-4),
N(S)1(-4)

NZM1-XTVD
260166

1 off



Door interlock

- Not defeated in the locked OFF and ON positions
- Can be modified such that it can be defeated from the outside using a screwdriver, when it is in the unlocked ON position.
- Door can be opened in OFF NZM...-XTVD(V)
- External warning plate/designation label can be clipped on

NZM2(-4), PN2(-4),
N(S)2(-4)

NZM2-XTVD
260168

NZM3(-4), PN3(-4),
N(S)3(-4)

NZM3-XTVD
260170

NZM4(-4), N(S)4(-4)

NZM4-XTVD
266614



Lockable on handle and switch with up to 3 padlocks. Can be locked in 0 position, with adequate modification also in I position. With door interlock. Lockable on switch in 0 position.

NZM1(-4), PN1(-4),
N(S)1(-4)

NZM1-XTVDV
260172

NZM2(-4), PN2(-4),
N(S)2(-4)

NZM2-XTVDV
260174

NZM3(-4), PN3(-4),
N(S)3(-4)


NZM3-XTVDV
260176

NZM4(-4), N(S)4(-4)

NZM4-XTVDV
266616



Red-yellow for emergency witching off



Lockable on handle and switch with up to 3 padlocks. Lockable in 0 position on handle. With door interlock. Lockable on switch in 0 position.

NZM1(-4), PN1(-4),
N(S)1(-4)

NZM1-XTVDVR
260178

1 off



Door interlock

- Not defeated in the locked OFF position.
- Can be modified such that it can be defeated from the outside using a screwdriver, when it is in the unlocked ON position.
- Door can be opened in OFF NZM...-XTVDVR
- External warning plate/designation label can be clipped on

NZM2(-4), PN2(-4),
N(S)2(-4)

NZM2-XTVDVR
260180

NZM3(-4), PN3(-4),
N(S)3(-4)


NZM3-XTVDVR
260182

NZM4(-4), N(S)4(-4)

NZM4-XTVDVR
266618



Extension shaft



400 mm max. mounting depth

NZM1(-4), PN1(-4),
N(S)1(-4)
NZM2(-4), PN2(-4),
N(S)2(-4)

NZM1/2-XV4
261232

1 off



Length 290 mm, can be cut to required length.

NZM3(-4), PN3(-4),
N(S)3(-4)
NZM4(-4), N(S)4(-4)

NZM3/4-XV4
261234

600 mm max. mounting depth

NZM1(-4), PN1(-4),
N(S)1(-4)
NZM2(-4), PN2(-4),
N(S)2(-4)

NZM1/2-XV6
260191

Length 425 mm, can be cut to required length.

NZM3(-4), PN3(-4),
N(S)3(-4)
NZM4(-4), N(S)4(-4)

NZM3/4-XV6
260193

Notes

Circuit-breaker can also be installed in a horizontal position 90° left/right, with the handle still in the same position.

For maximum shaft length 60 mm





Part no.	Price	Std. pack	Notes
Article no. when ordered separately	See price list		





Extremely narrow fittings

Part no.	Price	Std. pack	Note
Article no. when ordered separately	See price list		

Information relevant for export to North America



Part no.	Price	Std. pack	Notes	Part no.	Price	Std. pack	Note	Information relevant for export to North America
NZM1-XTVD-60 271504		1 off  	Door interlock • Can not be defeated in the locked OFF and ON positions • Can be modified such that it can be defeated from the outside using a screwdriver, when it is in the unlocked ON position.	NZM1-XTVD-0 279392		1 off  	Door interlock • Can not be defeated in the locked OFF and ON positions • Can be modified such that it can be defeated from the outside using a screwdriver, when it is in the unlocked ON position.	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 DIHS 022086 UL Listed, CSA certified Degree of Protection IEC: IP66, UL/CSA Type 4X, 12
NZM2-XTVD-60 271505			• Door can be opened in OFF	NZM2-XTVD-0 279393			• Door can be opened in OFF	
NZM3-XTVD-60 271506			• For maximum shaft length 60 mm	NZM3-XTVD-0 279394			• For maximum shaft length 60 mm	
NZM4-XTVD-60 271507			• Without shaft support	NZM4-XTVD-0 279395			• Without shaft support	
NZM1-XTVDV-60 271508			• Cannot be combined with additional handle	NZM1-XTVDV-0 279396			• Cannot be combined with additional handle	
NZM2-XTVDV-60 271509			• External warning plate/designation label can be clipped on.	NZM2-XTVDV-0 279397			• External warning plate/designation label can be clipped on.	
NZM3-XTVDV-60 271510				NZM3-XTVDV-0 279398				
NZM4-XTVDV-60 271511				NZM4-XTVDV-0 279399				

Part no.	Price	Std. pack	Notes	Part no.	Price	Std. pack	Note	Information relevant for export to North America
NZM1-XTVDVR-60 271512		1 off  	Door interlock • Can not be defeated in the locked OFF position. • Can be modified such that it can be defeated from the outside using a screwdriver, when it is in the unlocked ON position.	NZM1-XTVDVR-0 279400		1 off  	Door interlock • Can not be defeated in the locked OFF position. • Can be modified such that it can be defeated from the outside using a screwdriver, when it is in the unlocked ON position.	UL/CSA certification not required
NZM2-XTVDVR-60 271513			• Door can be opened in OFF	NZM2-XTVDVR-0 279401			• Door can be opened in OFF	
NZM3-XTVDVR-60 271514			• For maximum shaft length 60 mm	NZM3-XTVDVR-0 279402			• For maximum shaft length 60 mm	
NZM4-XTVDVR-60 271515			• Without shaft support • Cannot be combined with additional handle • External warning plate/designation label can be clipped on.	NZM4-XTVDVR-0 279403			• Without shaft support • Cannot be combined with additional handle • External warning plate/designation label can be clipped on.	

–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–

1.6 Circuit-breakers, switch-disconnectors

Door coupling rotary handles for North America

HPL17120EN

1 NZM1, NZM2, NZM3, NZM4

Product view

For use with

Part no.
Article no. when
ordered separately

Price
See
price list

Std. pack

Notes

Door coupling rotary handles

Complete including rotary drive and coupling parts



Extension shaft additionally required.



Degree of protection IP66/UL/CSA type 4X, 12

Difference to normal IEC handles:



Door opening only possible with active rotation beyond the 0 position.

Standard, black/grey



	Lockable in 0 position on handle. With door interlock.	NZM1, N1	NZM1-XTVD-NA 271445	1 off 	Door interlock <ul style="list-style-type: none"> • Can not be defeated in the locked OFF position. • Door opening with active rotation beyond the 0 position. • Cannot be combined with mechanical interlock • External warning plate/designation label can be clipped on.
		NZM2, N2	NZM2-XTVD-NA 271446		
		NZM3, N3	NZM3-XTVD-NA 271447		
		NZM4, N4	NZM4-XTVD-NA 271448		

	Lockable on handle and switch with up to 3 padlocks. Lockable in 0 position on handle. With door interlock. Lockable on switch in 0 position.	NZM1, N(S)1	NZM1-XTVDV-NA 100683	1 off 	Door interlock <ul style="list-style-type: none"> • Can not be defeated in the locked OFF position. • Door opening possible with active rotation beyond the 0 position. Can be defeated from the outside using a screwdriver. • Cannot be combined with mechanical interlock • External warning plate/designation label can be clipped on.
		NZM2, N(S)2	NZM2-XTVDV-NA 100684		
		NZM3, N(S)3	NZM3-XTVDV-NA 100685		
		NZM4, N(S)4	NZM4-XTVDV-NA 100686		

Red-yellow for emergency switching off

	Lockable on handle and switch with up to 3 padlocks. Lockable in 0 position on handle. With door interlock. Lockable on switch in 0 position.	NZM1, N(S)1	NZM1-XTVDVR-NA 271449	1 off 	Door interlock <ul style="list-style-type: none"> • Can not be defeated in the locked OFF position. • Door opening with active rotation beyond the 0 position. • Cannot be combined with mechanical interlock • External warning plate/designation label can be clipped on.
		NZM2, N(S)2	NZM2-XTVDVR-NA 271450		
		NZM3, N(S)3	NZM3-XTVDVR-NA 271451		
		NZM4, N(S)4	NZM4-XTVDVR-NA 271452		

Extension shaft

	400 mm max. mounting depth	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1/2-XV4 261232	1 off 	Length 290 mm, can be cut to required length.
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2/3-XV4 261234		
		NZM3(-4), PN3(-4), N(S)3(-4)	NZM3/4-XV4 260191		
		NZM4(-4), N(S)4(-4)	NZM4-XV4 260193		
	600 mm max. mounting depth	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1/2-XV6 260191	Length 290 mm, can be cut to required length.	
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2/3-XV6 260193		
		NZM3(-4), PN3(-4), N(S)3(-4)	NZM3/4-XV6 260191		
		NZM4(-4), N(S)4(-4)	NZM4-XV6 260193		

Notes Circuit-breaker can also be installed in a lying position 90° left/right, with the handle still in the same position.

NZM1, NZM2, NZM3, NZM4

HPL17121EN

1

Extremely narrow fittings


















60 mm

Part no.	Price	Std. pack	Notes	Part no.	Price	Std. pack	Notes	Information relevant for export to North America
Article no.	See price list			Article no.	See price list			
								Product Standards
								UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305
								UL File No. UL CCN CSA File No. CSA Class No. NA Certification
								022086 1437-01
								Degree of Protection
								UL Listed, CSA certified IEC: IP66, UL/ CSA Type 4X, 12
NZM1-XTVDV-60-NA 100667		1 off	Door interlock • Cannot be defeated in the locked OFF position. • Door opening possible with active rotation beyond the 0 position. Can be defeated from the outside using a screwdriver.	NZM1-XTVDV-0-NA 100675		1 off	Door interlock • Cannot be defeated in the locked OFF position. • Door opening possible with active rotation beyond the 0 position. Can be defeated from the outside using a screwdriver.	
NZM2-XTVDV-60-NA 100668			• Cannot be combined with mechanical interlock • External warning plate/ designation label can be clipped on.	NZM2-XTVDV-0-NA 100676			• Cannot be combined with mechanical interlock • External warning plate/ designation label can be clipped on.	
NZM3-XTVDV-60-NA 100669			• For a maximum shaft length of 60 mm • Without shaft support • Cannot be combined with additional handle NZM...-XDZ • External warning plate/ designation label can be clipped on.	NZM3-XTVDV-0-NA 100677			• For a maximum shaft length of 60 mm • Without shaft support • Cannot be combined with additional handle NZM...-XDZ • External warning plate/ designation label can be clipped on.	
NZM4-XTVDV-60-NA 100670				NZM4-XTVDV-0-NA 100678				
NZM1-XTVDVR-60-NA 100671		1 off	Door interlock • Can not be defeated in the locked OFF position. • Door opening with active rotation beyond the 0 position.	NZM1-XTVDVR-0-NA 100679		1 off	Door interlock • Can not be defeated in the locked OFF position. • Door opening with active rotation beyond the 0 position.	Product Standards
NZM2-XTVDVR-60-NA 100672			• Cannot be combined with mechanical interlock	NZM2-XTVDVR-0-NA 100680			• Cannot be combined with mechanical interlock	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305
NZM3-XTVDVR-60-NA 100673			• External warning plate/ designation label can be clipped on. NZM...-XTVDVR-60-NA	NZM3-XTVDVR-0-NA 100681			• External warning plate/ designation label can be clipped on. NZM...-XTVDVR-0-NA	UL File No. UL CCN CSA File No. CSA Class No. NA Certification
NZM4-XTVDVR-60-NA 100674			• For a maximum shaft length of 60 mm • Without shaft support • Cannot be combined with additional handle NZM...-XDZ • External warning plate/ designation label can be clipped on.	NZM4-XTVDVR-0-NA 100682			• For extremely narrow fittings • With special short extension shaft • Cannot be combined with additional handle NZM...-XDZ • External warning plate/ designation label can be clipped on.	022086 1437-01
								UL Listed, CSA certified
								Degree of Protection
								IEC: IP66, UL/ CSA Type 4X, 12
								UL/CSA certification not required

1.6 Circuit-breakers, switch-disconnectors

Rotary handles

1 NZM...-XDV

	For use with	Part no. Article no. for separate order	Price See price list	Std. pack	Notes	Information relevant for export to North America 
Rotary handle on circuit-breaker Complete with rotary drive						
Standard, black-grey						
	Lockable in 0 position on switch with upto 3 padlocks.	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDV 260125	1 off 	NZM1, 2, 3: Can also be combined with insulating surround. MODAN handle position detection by wire release can be retrofitted	Product Standards UL489; CSA-C22.2 N o. 5-09; IEC60947, CE marking E140305 DIHS 022086 1437-01 UL Listed, CSA certified
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDV 260127			
	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XDV 260129				
	NZM4(-4), N(S)4(-4)	NZM4-XDV 266608				
	Lockable in 0 position on handle with upto 3 padlocks.	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDVG 285247	1 off 	Can also be combined with insulating surround	
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDVG 285248			
Red-yellow for emergency switching off						
	Lockable in 0 position on switch with upto 3 padlocks.	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDVR 260135	1 off 	NZM1, 2, 3: Can also be combined with insulating surround. MODAN handle position detection by wire release can be retrofitted	Product Standards UL489; CSA-C22.2 N o. 5-09; IEC60947, CE marking E140305 DIHS 022086 1437-01 UL Listed, CSA certified
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDVR 260137			
	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XDVR 260140				
	NZM4(-4), N(S)4(-4)	NZM4-XDVR 266610				
	Lockable in 0 position on handle with upto 3 padlocks.	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XDVGR 285249	1 off 	Can also be combined with insulating surround	
		NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XDVGR 285280			

Notes Circuit-breaker can also be installed in a lying position 900 1e||right, with the handle still in the same position

NZM...-XDTV

For use with

Part no.
Article no. for
separate
order

Price
See
price
list

Std. pack

Notes

**Information relevant for export to
North America**



1

Rotary handles on switch with door interlock

Complete with rotary drive and insulating surround

Standard, black-grey



Lockable in 0 position on handle with up to 3 padlocks, can also be modified for the I position. Also available with door interlock e.g. for MCC service distribution

NZM1(-4), PN1(-4),
N(S)1(-4)

NZM1-XDTV
260131

1 off

In the ON position, can be defeated from the outside using a 1 mm pin
Can not be defeated in the locked OFF and ON positions
Door can be opened in OFF
Can only be switched ON when the door is closed

Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification

UL489;
CSA-C22.2
N o. 5-09;
IEC60947,
CE marking
E140305
DIHS
022086
1437-01
UL Listed,
CSA certified



Red-yellow for emergency switching off



Lockable in 0 position on handle with up to 3 padlocks. Also available with door interlock e.g. for MCC service distribution

NZM1(-4), PN1(-4),
N(S)1(-4)

NZM1-XDTV
260142

1 off



NZM2(-4), PN2(-4),
N(S)2(-4)

NZM2-XDTV
260144

Rotary handles on switch with door interlock for UL/CSA approved NA switches

Different to normal IEC handles: Door opening only possible with active rotation beyond the 0 position. Complete with rotary drive and insulating surround

Standard, black-grey



Lockable in 0 position on handle with up to 3 padlocks, can also be modified for the I position. Also available with door interlock e.g. for MCC service distribution

NZM1, N(S)1

NZM1-XDTV-NA
271453

1 off

Door interlock
In the ON position, can be defeated from the outside using a 1 mm pin
Can not be defeated in the locked OFF and ON positions
Door opening only possible with active rotation beyond the 0 position.
Can only be switched ON when the door is closed
Cannot be combined with mechanical interlock

Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification

UL489;
CSA-C22.2
N o. 5-09;
IEC60947,
CE marking
E140305
DIHS
022086
1437-01
UL Listed,
CSA certified



NZM2, N(S)2

NZM2-XDTV-NA
271454

Red-yellow for emergency switching off



Lockable in 0 position on handle with up to 3 padlocks. Also available with door interlock e.g. for MCC service distribution

NZM1, N(S)1

NZM1-XDTV-NA
271455

1 off



NZM2, N(S)2

NZM2-XDTV-NA
271456

Notes








Circuit-breaker can also be installed in a lying position 90° to the right, with the handle still in the same position

1.6 Circuit-breakers, switch-disconnectors

Main switch assembly kit






1

NZM...-XHB..., NZM...-XS...

Model	For use with	Part no. Article no. for separate order	Price See price list	Std. pack	Information relevant for export to North America	
Main switch assembly kit						
Equipment supplied:		For enhanced protection against direct contact on the incomer side, IP2X protection against contact with a finger can be ordered → Page 17/84				
<ul style="list-style-type: none"> • Door coupling rotary handle • Extension shaft NZM...-XV4 • External warning plate/designation label in German/English • Black and yellowflash 		Other external warning plates/designation labels can be clipped on.				
With black door coupling rotary handle		Degree of protection IP66/UL/CSA type 4X, 12				
	Lockable in 0 position on handle with up to 3 padlocks. With door interlock	– PN1(-4), N(S)1(-4)	NZM1-XHB 266626	1 off 	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 DIHS 022086 Degree of Protection 1437-01 UL Listed, CSA certi- Pied IEC:IP66, UL/CSA Type 4X,12	
		– PN2(-4), N(S)2(-4)	NZM2-XHB 266627			
		– PN3(-4), N(S)3(-4)	NZM3-XHB 266628			
		– N(S)4(-4)	NZM4-XHB 271779			
With red door coupling rotary handle for use of switch as emergency switching off device to IEC/EN 60204-1						
	Lockable in 0 position on handle with up to 3 padlocks. Lockable door as additional feature, locking facility on circuit-breaker in 0 position.	PN1(-4), N(S)1(-4)	NZM1-XHBR 266632			
		PN2(-4), N(S)2(-4)	NZM2-XHBR 266633			
		PN3(-4), N(S)3(-4)	NZM3-XHBR 266634			
		N(S)4(-4)	NZM4-XHBR 271842			
For side wall installation Actuation of the switch on the control panel side wall Switch mounting on mounting plate						
Standard, black/grey						
	Lockable in 0 position on handle with up to 3 padlocks, with adequate modification also in I position.	For operation on the left	NZM1(-4)	NZM1-XS-L 266641	1 off 	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 DIHS 022086 Degree of Protection 1437-01 UL Listed, CSA certi- Pied IEC:IP66, UL/CSA Type 4X,12
			PN1(-4), N(S)1(-4)	NZM2-XS-L 266642		
			NZM3(-4)	NZM3-XS-L 266643		
			PN3(-4), N(S)3(-4)	NZM4-XS-L 289806		
			NZM4(-4) N(S)4(-4)			
		For operation on the right	NZM1(-4)	NZM1-XS-R 266644		
			PN1(-4), N(S)1(-4)	NZM2-XS-R 266645		
			NZM3(-4)	NZM3-XS-R 266646		
			PN3(-4), N(S)3(-4)	NZM4-XS-R 289807		
			NZM4(-4) N(S)4(-4)			
Red-yellow for emergency switching off						
	Lockable in 0 position on handle with up to 3 padlocks.	For operation on the left	NZM1(-4)	NZM1-XSR-L 266653	1 off 	Product Standards UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 DIHS 022086 Degree of Protection 1437-01 UL Listed, CSA certi- Pied IEC:IP66, UL/CSA Type 4X,12
			PN1(-4), N(S)1(-4)	NZM2-XSR-L 266654		
			NZM3(-4)	NZM3-XSR-L 266655		
			PN3(-4), N(S)3(-4)	NZM4-XSR-L 289808		
			NZM4(-4) N(S)4(-4)			
		For operation on the right	NZM1(-4)	NZM1-XSR-R 266656		
			PN1(-4), N(S)1(-4)	NZM2-XSR-R 266657		
			NZM3(-4)	NZM3-XSR-R 266658		
			PN3(-4), N(S)3(-4)	NZM4-XSR-R 289809		
			NZM4(-4) N(S)4(-4)			

NZM...XS(R)M...


1

	Model	For use with	Part no. Article no. when ordered separately	Price See price list	Std. pack	Information relevant for export to North America
Main switch assembly kit for side wall installation with mounting bracket.						
For direct mounting of circuit-breaker and handle in the side wall of the control cabinet						
Equipment supplied:						
.Door coupling rotary handle						
.Mounting bracket						
.Special short extension shaft						
.External warning plate/designation label in German/English						
.Black and yellowflash						
For enhanced protection against direct contact on the in-cabinet side, IP2X protection against contact with a finger can be ordered } Page 17/84						
Other external warning plates/designation labels can be clipped on.						
Degree of protection IP66/UL/CSA type 4X, 12						
Standard, black/grey						
	Lockable in 0 position with adequate modification also in I position. Minimum clearance between control panel side walls and circuit-breaker is defined by mounting bracket. Extension cannot be used	For operation on the left	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XSM-L 266663	1 off 	Product Standards UL489; CSA-C22.2 UL File No. UL CCN CSA File No. CE marking E140305 NA Certification DIHS 022086 Degree of Protection 1437-01 UL Listed, CSA certified IEC:IP66, UL/CSA Type 4X,12
		For operation on the left	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XSM-L 266664		
		For operation on the left	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XSM-R 266665		
		For operation on the left	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XSM-R 266666		
Red-yellow for emergency switching off						
	Lockable in 0 position on handle. Minimum clearance between control panel side walls and circuit-breaker is defined by mounting bracket. Extension cannot be used	For operation on the left	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XSRM-L 266671	1 off 	Product Standards UL489; CSA-C22.2 UL File No. UL CCN CSA File No. CE marking E140305 NA Certification DIHS 022086 Degree of Protection 1437-01 UL Listed, CSA certified IEC:IP66, UL/CSA Type 4X,12
		For operation on the left	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XSRM-L 266672		
		For operation on the left	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XSRM-R 266673		
		For operation on the left	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XSRM-R 266674		
Additional plate						
For fitting to the mounting bracket when using neutral conductor or PE conductor terminals K25, K50, K95 or K150.						
-	-	PN1(-4), N(S)1(-4) NZM2(-4), N(S)2(-4)	NZM1/2-XZB 266676		1 off 	UL/CSA certification not required
Notes						
Additional terminal arrangement for side wall operator with mounting bracket →Engineering, Page 17/153						

1.6 Circuit-breakers, switch-disconnectors

Main switch assembly kit

1 NZM...XS(R)M...

Model	For use with	Part no. Article no. when ordered separately	Price See price list	Std. pack	Information relevant for export to North America 
-------	--------------	--	-------------------------------	-----------	--

Main switch assembly kit with additional rotary handle

Main switch assembly kit with additional rotary handle for switching with opened control panel door

Equipment supplied:


- Door coupling rotary handle
- Additional rotary handle on switch with "Deliberate Action" operation
- Extension shaft NZM...-XV6 for mounting depth 600 mm, NZM1/2-XV4 with NZM1 for mounting depth 400 mm
- External warning plate/designation label in German/English
- Black and yellow flash

For enhanced protection against direct contact on the incomer side, IP2X protection against contact with a finger can be ordered → Page 17/84





Other external warning plates/designation labels can be clipped on.

Degree of protection IP66/UL/CSA type 4X, 12

With black door coupling rotary handle




on handle with up to 3 padlocks, can also be modified for the I position. Lockable door as additional feature, locking facility on circuit-breaker in 0 position.





IEC	NZM1(-4) PN1(-4), N1(-4)	NZM1-XHB-DA 125956	1 off 	Product Standards UL File No. UL489; UL CCN CSA-C22.2 CSA File No. N o. 5-09; CSA Class No. IEC60947, NA Certification CE marking Degree of Protection E140305 DIHS 022086 1437-01 UL Listed, CSA certified IEC:IP66, UL/CSA Type 4X,12
UL/CSA	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XHB-DA-NA 125958		
IEC	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XHB-DA 116895	1 off 	Product Standards UL File No. UL489; UL CCN CSA-C22.2 CSA File No. N o. 5-09; CSA Class No. IEC60947, NA Certification CE marking Degree of Protection E140305 DIHS 022086 1437-01 UL Listed, CSA certified IEC:IP66, UL/CSA Type 4X,12
UL/CSA	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XHB-DA-NA 116897		
IEC	NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XHB-DA 118988	1 off 	Product Standards UL File No. UL489; UL CCN CSA-C22.2 CSA File No. N o. 5-09; CSA Class No. IEC60947, NA Certification CE marking Degree of Protection E140305 DIHS 022086 1437-01 UL Listed, CSA certified IEC:IP66, UL/CSA Type 4X,12
UL/CSA	NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XHB-DA-NA 119000		
IEC	NZM4(-4) PN4(-4), N(S)4(-4)	NZM4-XHB-DA 119002	1 off 	Product Standards UL File No. UL489; UL CCN CSA-C22.2 CSA File No. N o. 5-09; CSA Class No. IEC60947, NA Certification CE marking Degree of Protection E140305 DIHS 022086 1437-01 UL Listed, CSA certified IEC:IP66, UL/CSA Type 4X,12
UL/CSA	NZM4(-4) PN4(-4), N(S)4(-4)	NZM4-XHB-DA-NA 119004		

With red door coupling rotary handle











For use of switch as emergency switching off device



Lockable in 0 position on handle with up to 3 padlocks. With door interlock and lockable on switch in 0 position.

IEC	NZM1(-4) PN1(-4), N1(-4)	NZM1-XHB-DAR 125957	1 off 	Product Standards UL File No. UL489; UL CCN CSA-C22.2 CSA File No. N o. 5-09; CSA Class No. IEC60947, NA Certification CE marking Degree of Protection E140305 DIHS 022086 1437-01 UL Listed, CSA certified IEC:IP66, UL/CSA Type 4X,12
UL/CSA	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XHB-DAR-NA 125959		
IEC	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XHB-DAR 116896	1 off 	Product Standards UL File No. UL489; UL CCN CSA-C22.2 CSA File No. N o. 5-09; CSA Class No. IEC60947, NA Certification CE marking Degree of Protection E140305 DIHS 022086 1437-01 UL Listed, CSA certified IEC:IP66, UL/CSA Type 4X,12
UL/CSA	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XHB-DAR-NA 116898		
IEC	NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XHB-DAR 118989	1 off 	Product Standards UL File No. UL489; UL CCN CSA-C22.2 CSA File No. N o. 5-09; CSA Class No. IEC60947, NA Certification CE marking Degree of Protection E140305 DIHS 022086 1437-01 UL Listed, CSA certified IEC:IP66, UL/CSA Type 4X,12
UL/CSA	NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XHB-DAR-NA 119001		
IEC	NZM4(-4) PN4(-4), N(S)4(-4)	NZM4-XHB-DAR 119003	1 off 	Product Standards UL File No. UL489; UL CCN CSA-C22.2 CSA File No. N o. 5-09; CSA Class No. IEC60947, NA Certification CE marking Degree of Protection E140305 DIHS 022086 1437-01 UL Listed, CSA certified IEC:IP66, UL/CSA Type 4X,12
UL/CSA	NZM4(-4) PN4(-4), N(S)4(-4)	NZM4-XHB-DAR-NA 119004		







NZM...-XRAV..., ZFS..., BPF...

	For use with	Part no. Article no.	Price See price list	Std. pack	Notes
Rear-mounted drives					
For direct rear connection of the switch to the side of the control panel or control panel door. Switch actuation on rear through side wall or control panel door. For switch with toggle lever. For enhanced protection against direct contact on the incoming side, IP2X protection against contact with a finger can be ordered → Page 17/84. Degree of protection IP66, UL/CSA type 4X, 12					
Standard, black/grey					
	Lockable in 0 position on handle with up to 3 padlocks.	NZM1, N1, NS1, PN1	NZM1-XRAV 107245	1 off 	
		NZM2, N2, NS2, PN2	NZM2-XRAV 107247		
Red-yellow for emergency switching off					
	Lockable in 0 position on handle with up to 3 padlocks.	NZM1, N1, NS1, PN1	NZM1-XRAVR 107249	1 off 	
		NZM2, N2, NS2, PN2	NZM2-XRAVR 107261		
External warning plate/designation label					
					
"Main switch—open in 0 position"	German/English	N(S)1(-4) NZM2(-4), PN2(-4), N(S)2(-4)	ZFS61/62- NZM7 272525	10 off	A bilingual external warning plate/designation label in German/English is already included in the main switch assembly kit.
	German	NZM3(-4), PN3(-4), N(S)3(-4)	ZFS61-NZM7 051089		
	English	NZM4(-4), N(S)4(-4)	ZFS62-NZM7 065957		
	French		ZFS63-NZM7 065958		
	Chinese/English		ZFS82-NZM 104910		
	Chinese		ZFS83-NZM 105945		
	Further languages		ZFS*-NZM7 999978	1 off	External warning plates are available in the following languages: 64 Bulgarian 74 Russian 65 Danish 75 Swedish 66 Finnish 76 Serbo-Croatian 67 Dutch 77 Spanish 68 Italian 78 Czech 69 Greek 79 Turkish 70 Norwegian 80 Hungarian 71 Polish 81 Afrikaans 72 Portuguese 82 Chinese/English 73 Romanian 83 Chinese To obtain the order number, insert the language code number into the part number required.
Symbol	Circuit-breaker symbol		ZFS-LS-NZM 104829		
	Switch-disconnector symbol		ZFS-LTS-NZM 104828		
	Disconnector symbol		ZFS-TS-NZM 115365		
Blank	Blank (for engraving or printing)		ZFS60-NZM7 065896	10 off	Ordering example External warning plate in Finnish: ZFS66-NZM7
Lightning symbol					
Including terminal marking for main switch					
	Small		N(S)1(-4) NZM2(-4), PN2(-4), N(S)2(-4)	BPF-NZM7 217294	10 off Included as standard in main switch assembly kit Marking of the input side of the switch is possible
	Large		N(S)3(-4) NZM4(-4), N(S)4(-4)	BPF-NZM10 231363	
Information relevant for export to North America 			Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Degree of Protection	UL489; CSA-C22.2 No. 5-09; E140305 DIHS 022086 1437-01 UL Listed, CSA certified IEC: IP66, UL/CSA Type 4X, IEC60947, CE marking12	


















1.6 Circuit-breakers, switch-disconnectors

Side-mounted handle

1 NZM...-XSH...-NA

	For use with	Part no. Article no.	Price See price list	Std. pack	Notes	Information relevant for export to North America 
Side-mounted handle						
For mounting outside the control panel door. Actuation of a switch with toggle lever using a Bowden cable and mechanical components mounted on the front of the switch. For switch with toggle lever.						
Caution! Intended exclusively for use outside the scope of validity of the IEC/EN 60947 area. Handle, metal, black/red						
	Degree of protection UL/CSA Type 12	NZM2...-NA, NS2...-NA NZM3...-NA, NS3...-NA	NZM-XSHGVR12-NA 107269		Lockable in 0-position on handle with up to 3 padlocks, for 1 door of an American style control panel (door plus wide bar beside the door). For each handle 1 additional mechanical unit and 1 Bowden cable is required.	ProductStandards UL File No. UL489; CSA-C22.2 UL CCN N o. 5-09 CSA File No. E140305 CSA Class No. DIHS NA Certification 236770 1437-01 UL Listed, CSA certified IEC: IP66, UL/CSA Type 12
	Degree of protection UL/CSA Type 4X		NZM-XSHGVR4X-NA 107268			ProductStandards UL File No. UL489; CSA-C22.2 UL CCN N o. 5-09 CSA File No. E140305 CSA Class No. DIHS NA Certification 236770 1437-01 Degree of Protection UL Listed, CSA certified IEC: IP66, UL/CSA Type 4X
Mechanical unit						
		NZM2...-NA, NS2...-NA	NZM2-XSHM-NA 107266	1 off 	For mounting on the front of a switch with toggle lever, including fixing sundries	UL/CSA certification not required
		NZM3...-NA, NS3...-NA	NZM3-XSHM-NA 107267			
Bowden cables						
	Nominal length 36" =91.4 cm	NZM2...-NA, NS2...-NA	NZM-XSHBZ36-NA 107263	1 off 		ProductStandards UL File No. UL489; CSA-C22.2 UL CCN N o. 5-09 CSA File No. E140305 CSA Class No. DIHS NA Certification 236770 1437-01 UL Listed, CSA certified
	Nominal length 48" =121.9 cm	NZM3...-NA, NS3...-NA	NZM-XSHBZ48-NA 107264			
	Nominal length 60" =152.4 cm		NZM-XSHBZ60-NA 107265			
						ProductStandards UL File No. UL489; CSA-C22.2 UL CCN N o. 5-09 CSA File No. E140306 CSA Class No. DIHS NA Certification 236771 1437-02 UL Listed, CSA certified

NZM...XDZ, NZM...XBR, NZM...X...

	For use with	Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes
Additional handle					
Enables switching when control panel door is open					
	NZM1(-4), PN1(-4), N(S)1(-4) NZM2(-4), PN2(-4), N(S)2(-4)	NZM1/2-XDZ 266621		1 off  	Push-fits on to the extension shaft. 100 mm free extension shaft required.
	NZM3(-4), PN3(-4), N(S)3(-4) NZM4(-4), N(S)4(-4)	NZM3/4-XDZ 266622			Cannot be combined with door coupling rotary handles NZM...-XT...-60 or NZM...-XT...0.
Insulating surround					
For toggle levers, rotary handles with rotary drive and remote operators Degree of protection IP40					
	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XBR 260195		1 off  	For rectangular cut-out on doors and enclosures with material thicknesses of 1.5—5 mm. External warning plate/designation label can be clipped on. NZM4-XBR cannot be combined with rotary handle with rotary mechanism.
	NZM2(-4) PN2(-4), N(S)2(-4)	NZM2-XBR 260197			
	NZM3(-4) PN3(-4), N(S)3(-4)	NZM3-XBR 284645			
	NZM4(-4) N(S)4(-4)	NZM4-XBR 284646			
Toggle lever locking device					
Lockable in Off position with up to three padlocks (hasp thickness 4—8 mm)					
	NZM1(-4) PN1(-4), N(S)1(-4)	NZM1-XKAV 260199		1 off	Cannot be combined with insulating surround
	NZM2(-4), PN2(-4), N(S)2(-4) NZM3(-4), PN3(-4), N(S)3(-4)	NZM2/3-XKAV 260201			
Spacers					
Enables fast and attractively priced offsetting of varying construction sizes with/without rotary handle or remote operator to the same front depth					
	NZM1(-4), PN1(-4), N(S)1(-4) NZM2(-4), PN2(-4), N(S)2(-4)	NZM1/2-XAB 260203		1 off  	Grid depth 17.5 mm, M4 thread One set contains 4 spacers Maximum component fitting: NZM1: 4 off perfixing screw, NZM2: 2 off perfixing screw, 2(NZM1) or 4(NZM2) fixing screws contained per switch
	NZM3(-4) PN3(-4), N(S)3(-4) NZM4(-4) N(S)4(-4)	NZM3-XAB 260211			Grid depth 17.5 mm, M5 thread One set contains 4 spacers NZM3, NZM4: 1 off perfixing screw 4 fixing screws per switch included
Clips					
Allows switches to be clipped on to DIN rails					
	NZM1(-4) PN1(-4) N(S)1(-4)	NZM1-XC35 260213		1 off  	For 35 mm top-hat rails
	NZM2(-4) PN2(-4) N(S)2(-4)	NZM2-XC75 260215			For 75 mm top-hat rails Not in combination with remote operator
Information relevant for export to North America		Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking E140305 DIHS 022086 1437-01 UL Listed, CSA certified		

1.6 Circuit-breakers, switch-disconnectors

Mechanical interlock

1

NZM...XMV(R)(L), NZM-XBZ...

For use with

Part no.
Article no. for
separate order

Price
See
price list


Std. pack

Notes

**Information relevant for
export to North America**



Mechanical interlock for (door coupling) rotary handles



NZM1(-4)
PN1(-4), N(S)1(-4) **NZM1-XMV**
281581


1 off




Allows interlocking of 2, 3 or 4 switches, including different construction sized switches, with Bowden cables.
For every switch an interlocking module NZM...-XMV and a rotary handle on switch NZM...-XDV or a door coupling rotary handle NZM...-XTVD and Bowden cables are required.
Possible combinations and interlock variants,
→Engineering
Cannot be combined with UL/CSA door coupling rotary handles NZM...-XTV...-NA, paralleling mechanisms, side wall operators, remote operators or insulating surrounds. Selection and combinations of required Bowden cables
→Engineering

Product Standards

UL File No. UL489;
UL CCN CSA-C22.2
CSA File No. N o. 5-09;
CSA Class No. IEC60947,
NA Certification CE marking
E140305
DIHS
022086
1437-01
UL Listed,
CSA
certified



NZM2(-4)
PN2(-4), N(S)2(-4) **NZM2-XMV**
281582



NZM3(-4)
PN3(-4), N(S)3(-4) **NZM3-XMV**
281583
NZM4(-4)
N(S)4(-4) **NZM4-XMV**
281584

Bowden cables

For mechanical interlock for (door coupling) rotary handles



Length: 225 mm NZM1(-4), PN1(-4), N(S)1(-4) **NZM-XBZ225**
281585
Length: 600 mm NZM2(-4), PN2(-4), N(S)2(-4) **NZM-XBZ600**
281586
Length: 1000 mm NZM3(-4), PN3(-4), N(S)3(-4) **NZM-XBZ1000**
281587

1 off



Selection and combinations of Bowden cables
→Engineering


Product Standards

UL489;
UL File No. CSA-C22.2
UL CCN N o. 5-09;
CSA File No. IEC60947,
CSA Class No. CE marking
E140305
NA Certification DIHS
022086
1437-01
UL Listed,
CSA
certified

Mechanical interlock for remote operator

For 2 switches of the same or different construction size with opposed operation.

Adjacent mounting.




NZM2(-4), N(S)2(-4) **NZM2-XMVR**
+NZM2(-4), N(S)2(-4) 104543
NZM2(-4), N(S)2(-4) **NZM2/3-XMVR**
+NZM3(-4), N(S)3(-4) 104544
NZM3(-4), N(S)3(-4) **NZM3-XMVR**
+NZM3(-4), N(S)3(-4) 104545
NZM3(-4), N(S)3(-4) **NZM3/4-XMVR**
+NZM4(-4), N(S)4(-4) 104546
NZM4(-4), N(S)4(-4) **NZM4-XMVR**
+NZM4(-4), N(S)4(-4) 104547

1 off

Contains parts for both switch sides. Extension shaft additionally required.
Maximum switch spacing
→Engineering
Can not be combined with rotary handles, door coupling rotary handles, early-make auxiliary contacts, and direct-switching remote operator NZM2-XRD

For 2 switches of the same or different construction size with opposed operation.
Extra long Bowden cable for mounting one above the other or in adjacent enclosures.



NZM2(-4), N(S)2(-4) **NZM2-XMVRL**
+NZM2(-4), N(S)2(-4) 104548
NZM2(-4), N(S)2(-4) **NZM2/3-XMVRL**
+NZM3(-4), N(S)3(-4) 104549
NZM3(-4), N(S)3(-4) **NZM3-XMVRL**
+NZM3(-4), N(S)3(-4) 104550
NZM3(-4), N(S)3(-4) **NZM3/4-XMVRL**
+NZM4(-4), N(S)4(-4) 104551
NZM4(-4), N(S)4(-4) **NZM4-XMVRL**
+NZM4(-4), N(S)4(-4) 104552

1 off

Contains parts for both switch sides.
Extension shaft additionally required.
Maximum switch spacing
→Engineering
Can not be combined with rotary handles, door coupling rotary handles, early-make auxiliary contacts, and direct-switching remote operator NZM2-XRD

PN...XPA. NZM...-XV...

1

For use with	Part no. Article no. for separate order	Price See price list	Std. pack	Notes	Information relevant forexportto North America
--------------	---	----------------------------	-----------	-------	--

Paralleling mechanism

Simultaneous actuation of 2 PN switch-disconnectors of the same type mounted side-by-side.
Not UL/CSA approved
switch-disconnectors of the same

	PN1(-4) + PN1(-4)	PN1-XPA 283471	1 off	PN1, PN2 <ul style="list-style-type: none"> • 1 x rotary handle on switch (-XD) supplied. • 1 x door coupling rotary handle (-XTVD) supplied.
	PN2(-4) + PN2(-4)	PN2-XPA 283472		
	PN3(-4) + PN3(-4)	PN3-XPA 283473		PN3 <ul style="list-style-type: none"> • 1 x rotary handle on switch (not lockable) supplied. • 1 x door coupling rotary handle (not lockable) supplied. • Not suitable for use as a main switch

Notes

Extension shaft(-XV4(6)) additionally required for the door coupling rotary handle.
Cannot be combined with mechanical interlock, insulating surrounds, side wall operators or remote operators


For use as emergency switching off device

For this the door coupling rotary handle requires an exchange thumb-grip in red/yellow according to the following order number

- for PN1 and PN2: NZM2-XDGVR →100747
- for PN3: NZM4-XDGVR →100774

Note: The locking function of these handles must not be used

Extension shaft



400 mm max. built-in depth	NZM1(-4), PN1(-4), N(S)1(-4) NZM2(-4), PN2(-4), N(S)2(-4)	NZM1/2-XV4 261232	1 off 	Length 290 mm, can be cut to required length	UI/CSA certification not required
600 mm max. built-in depth	NZM3(-4), PN3(-4), N(S)3(-4) NZM4(-4), N(S)4(-4)	NZM3/4-XV4 261234			
	NZM1(-4), PN1(-4), N(S)1(-4) NZM2(-4), PN2(-4), N(S)2(-4)	NZM1/2-XV6 260191		Length 425 mm can be cut to required length	
	NZM3(-4), PN3(-4), N(S)3(-4) NZM4(-4), N(S)4(-4)	NZM3/4-XV6 260193			

Notes

Circuit-breaker can also be installed in a lying position 90° left/right, with the handle still in the same position

1.6

Circuit-breakers, switch-disconnectors

Multi-function component adapters

1

NZM...-XAD...





	Number of poles	Rated operational current I_n A	Adapter with mm	For use with	Part no. suffix Article no. for ordering with basic device	Price See price list
--	-----------------	---	------------------------	--------------	--	----------------------------

Component adapters for circuit-breakers and switch-disconnectors

For mounting on flat copper bars 12-30x5-10 mm, double T and triple T profile



Rated operating voltage U_a : 690 V

- Temperature resistant to 120 °C
- Self-extinguishing to UL 94
- Track resistance CTI 200



	3 pole	160	90	NZM1, PN1, NIS11	—	
		250	106	NZM2, PN2, NIS12	—	
		630	140	NZM3, PN3, NIS13	—	
	3 pole	250	140	NZM2-4, PN2-4, N 2-4	—	
		630	185	N 2-4 NZM3-4 PN3-4, N 3-4	—	

Connection block for component adapters

For NZM2, NZM3 circuit-breakers

	3 pole	Above	250	—	NZM2, PN2, N(S)2	+NZM2-XKR40 281664
		Below			NZM2 PN2, N(S)2	+NZM2-XKR4U 281665
		Above	630		NZM3, PN3, N(S)3	+NZM3-XKR130 281667
	3 pole	Below		—	NZM3-4, PN3-4, N (S)3-4	+NZM3-XKR13U 115796
		Above	250		NZM2-4, PN2-4, N(S)2-4	+NZM2-4-XKR40 118905
		Below		—	NZM3, PN3, N(S)3	+NZM2-4-XKR4U 118906
		Above	630		NZM3-4, PN3-4, N(S)3-4	+NZM3-4-XKR130 118908
		Below		—	NZM2-4, PN2-4, N (S)2-4	+NZM3-4-XKR13U 118909

NZM-XAD

Part no.	Price	Std. pack	Notes	Information relevant for export to North America
Article no. for separate order	See price list			
NZM1-XAD160 104554		1 off 	For switch and standard connection with box terminal. Connection to the system at top using supplied connection cable. In conjunction with IP2X protection against contact with a finger. Enhanced contact protection on the switch secondary side. Clips onto busbar with combination foot. Combination foot for adjustment to 5 and 10 mm rail thickness, terminal capacity 6 x 9 x 0.8. Rated short-circuit switching capacity 35 kA at 480 V. Mounted by latching onto de-energized busbar.	<p>Product Standards</p> <p>UL File No. UL CCN CSA File No. CSA Class No. NA Certification Conditions of Acceptability</p> <p>Suitable for Max. Voltage Rating Degree of Protection</p> <p>UL508A; CSA-C22.2 No. 14; IEC 60439-1; CE marking E300273 NMTR, NMTR7 236217 3211-37 UL Listed, CSA certified</p> <p>Refer to approbation report Feeder circuits 600 V AC Feeder circuits</p>
NZM2-XAD250 104555			Connection to the system possible at top or bottom via connection on rear(+)NZM2-XKR4... Mounting using clamp and screwfixing. Rated short-circuit switching capacity 65 kA at 480 V, 50 kA at 600 V. Mounted by latching onto de-energized busbar.	
NZM3-XAD630 107206			Connection to the system possible at top or bottom via connection on rear(+)NZM3-XKR13... For mounting use claw terminal. Rated short-circuit switching capacity 65 kA at 480 V, 50 kA at 600 V. Mounted by latching onto de-energized busbar.	
NZM2-4-XAD250 138388			Connection to the system possible at top via connection on rear with (+)NZM2-4-XKR4... Mounting using clamp and screwfixing.	
NZM3-4-XAD630 138389			Connection to the system possible at top via connection on rear with (+)NZM3-4-XKR13... Mounting using clamp and screwfixing.	
NZM2-XKR4 281666		1 off 	Part no. and part no. suffix include parts for one switch side at top or bottom (for NZM3 top only). Required with component adapter and switch with connection on rear	<p>Product Standards</p> <p>UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA Suitable for</p> <p>Current Limiting CB Max. Voltage Rating Degree of Protection</p> <p>UL 489; CSA-C22.2 N o.5-09; IEC 60947-2; CE marking E31593 DIVA 022086 1432-01 UL Listed, CSA certified Yes Feeder circuits, branch circuits Yes 480Y/277 V IEC: IP20; UL/CSA Type:</p>
NZM3-XKR13 281668				
NZM2-4-XKR4 118907				
NZM3-4-XKR13 119020				

1.6 Circuit-breakers, switch-disconnectors

Remote operators

1 NZM...-XR


For use with	Rated control voltage U_s V	Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes
--------------	-------------------------------------	---	-------------------------	-----------	-------



Remote operators

For remote switching of circuit-breakers and switch-disconnectors ON and OFF switching and resetting by means of two-wire or three-wire control.

Local switching by hand possible.
Lockable in the 0 position of the remote operator with up to 3 padlocks (hasp thickness: 4–8 mm)


Closing delay 110–170 ms, opening delay 110–170 ms





NZM2(-4) N(S)2(-4)	110-130 V 50/60 Hz	NZM2-XRD110-130AC 115390	1 off  	Sliding switch for "Auto" or "Manual" Max. number auxiliary contacts: –Standard auxiliary contacts: 2 –Trip-indicating auxiliary contact: 1 Cannot be combined with switch-disconnector PN... Cannot be combined with mechanical interlock 1)Not UL/CSA approved
	208-240 V 50/60 Hz	NZM2-XRD208-240AC 115391		
	380-440 V 50/60 Hz	NZM2-XRD380-440AC 115392		
	24-30 V DC	NZM2-XRD24-30DC 115393		
	110-130 V DC	NZM2-XRD110-130DC 115394		
	220-250 V DC	NZM2-XRD220-250DC 115395		

Closing delay 60-100 ms, opening delay 300-3000 ms

Can be synchronized



NZM2(-4) N(S)2(-4)	110-130 V 50/60 Hz	NZM2-XR110-130AC 259830	1 off  	Cannot be combined with switch-disconnector PN... Dual auxiliary switch M 22-CK11 (20/02) can not be combined with remote operator NZM3-XR...
	208-240 V 50/60 Hz	NZM2-XR208-240AC 259832		
	380-440 V 50/60 Hz	NZM2-XR380-440AC 259834		
	24-30 V DC	NZM2-XR24-30DC 259836		
	48-60 V DC	NZM2-XR48-60DC 259838		
	110-130 V DC	NZM2-XR110-130DC 259840		
	220-250 V DC	NZM2-XR220-250DC 259842		
NZM3(-4) N(S)3(-4)	110-130 V 50/60 Hz	NZM3-XR110-130AC 259848		
	208-240 V 50/60 Hz	NZM3-XR208-240AC 259850		
	380-440 V 50/60 Hz	NZM3-XR380-440AC 259852		
	24-30 V DC	NZM3-XR24-30DC 259854		
	48-60 V DC	NZM3-XR48-60DC 259856		
	110-130 V DC	NZM3-XR110-130DC 259858		
	220-250 V DC	NZM3-XR220-250DC 259860		
NZM4(-4) N(S)4(-4)	110-130 V 50/60 Hz	NZM4-XR110-130AC 266684		
	208-240 V 50/60 Hz	NZM4-XR208-240AC 266685		
	380-440 V 50/60 Hz	NZM4-XR380-440AC 266686		
	24-30 V DC	NZM4-XR24-30DC 266691		
	48-60 V DC	NZM4-XR48-60DC 266692		
	110-130 V DC	NZM4-XR110-130DC 266693		
	220-250 V DC	NZM4-XR220-250DC 266694		

Notes

Two-and-three-wire control, circuit diagram → Engineering, Page 17/153


Information relevant for export to North America





Product Standards	UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.	E140305
UL CCN	DIHS
CSA File No.	022086
CSA Class No.	1437-01

NZM2, NZM3, NZM4, NZM...FI

1


	For use with	Part no. Article no. when ordered separately	Price See price list	Std. pack	Notes
Cover for 4th pole					
Additional shroud for mounting the NZM2-XR... and NZM3-XR... on a 4 pole switch	NZM2-4 N2-4	NZM2-XAVPR 266677		1 off	—
	NZM3-4 N3-4	NZM3-XAVPR 266678		1 off	
Sealing device for "Auto" position					
Manual operation possible nnlv after ramvinn seal	NZM2(-4) N(S)2(-4)	NZM2-XRDPL 137305		1 off	Suitable for remote operator NZM2-XRD
Protective cover for door cutout					
	NZM2-XR NZM3-XR NZM4-XR	RTR-NZM10 034825		1 off	Electrical remote switching and manual tripping (push to trip) are still possible.

Number of poles	Rated current = Rated uninterrupted current I_n A	Setting range		Part no. Article no.	Price See price list	Std. pack
		Overload releases I_l A	Short-circuit releases I_s A			
				B = box terminals S = screw terminals		

Circuit-breakers with earth-fault release, 3 pole
For apparatus with power electronics,
such as power inverters and frequency inverters



AC/DC sensitive according to core-balance principle in range of 0—100 kHz residual-current frequency
Not UL/CSA approved.
Suitable for use in three-phase systems.
Rated operating voltage: 400 V (50/60 Hz)
Rated fault current $I_{sc} = 0.03$ A
Internal power supply $U_{int} = 50—400$ V
Turnkey combination of current-limiting circuit-breaker and residual-current device.
Adjusting buttons can be sealed.

	3 pole	125	100-125	750-1250	NZMH2-A125-FIA30 129710	S	1 off
		160	125-160	960-1600	NZMH2-A160-FIA30 112627	S	
		200	160-200	1200-2000	NZMH2-A200-FIA30 112628	S	
		250	200-250	1500-2500	NZMH2-A250-FIA30 112629	S	
		125	100-125	750-1250	NZMH2-A125-FIA30-BT 129711	B	
		160	125-160	960-1600	NZMH2-A160-FIA30-BT 116304	B	
		200	160-200	1200-2000	NZMH2-A200-FIA30-BT 116305	B	
		250	200-250	1500-2500	NZMH2-A250-FIA30-BT 116306	B	

1.6 Circuit-breakers, switch-disconnectors


Auxiliary contacts, trip-indicating auxiliary contacts

1 NZM...XFI...


For use with Number of conductors **Part no.** Article no. **Price** See price list Std. pack Notes

Earth-fault release

To IEC/EN 60947-2
Not UL/CSA approved
Suitable for use in three- and single-phase systems

 Pulse-current sensitive according to core-balance principle
For 3 and 4 pole NZM1}-4) circuit-breakers and N1}-4) switch-disconnectors, dependant on mains power $U_n = 200 \dots 415 \text{ V } 50/60 \text{ Hz}$

Mounting on right side up to $I_n=160 \text{ A}$ at $I_{cs}=50 \text{ kA}$




Rated fault current $I_{\Delta n}=0.03 \text{ A}$	NZM1 N(S)1	3 pole	NZM1-XF130R 104603	1off
	NZM1-4 N1-4	4 pole	NZM1-4-XF130R 104606	
Rated fault current $I_{\Delta n}=0.3 \text{ A}$	NZM1 N(S)1	3 pole	NZM1-XF1300R 104604	
	NZM1-4 N1-4	4 pole	NZM1-4-XF1300R 104607	
Rated fault current $I_{\Delta n}=0.03-0.1-0.3-0.5-1-3 \text{ A}$ Delay time $t_{re}=10-60-150-300-450 \text{ ms}$	NZM1 N(S)1	3 pole	NZM1-XFIR 104605	
	NZM1-4 N1-4	4 pole	NZM1-4-XFIR 104608	

$At_{I_{\Delta n}}=0.03 \text{ A}$: delaytime t_{re} , always fixed at 10 ms.
Alarm indication >30% $I_{\Delta n}$ by yellow LED.
Trip indication by up to 2 auxiliary contacts (HIAFI) can be retrofitted: N/O=M22-K01, NC=M22-K10 are reset with the reset toggle lever.
If the trip-indicating auxiliary contact in the fault current block is used, the NC contacts operates as a N/O contact and the NC contact operates as N/O contacts. Double contact not permissible.

Not in combination with insulated enclosure or main switch assembly kit for side wall installation with mounting bracket.
NZM1-XFL..R can not be used in combination with lower cover NZM1-XKSA.
NZM1-XFI..U not in combination with shunt or undervoltage release, early-make auxiliary contacts.


Rated ultimate short-circuit breaking capacity is determined by the fitted NZM1 or NS1, or, if a switch-disconnector N1 is used, by the fitted back-up fuse → Technical data.
Adjusting buttons can be sealed.


Mounting below up to 100 A



Rated fault current $I_{\Delta n}=0.03 \text{ A}$	NZM1 N(S)1	3 pole	NZM1-XF130U 104609	1off
	NZM1-4 N1-4	4 pole	NZM1-4-XF130U 104612	
Rated fault current $I_{\Delta n}=0.3 \text{ A}$	NZM1 N(S)1	3 pole	NZM1-XF1300U 104610	
	NZM1-4 N1-4	4 pole	NZM1-4-XF1300U 104613	
Rated fault current $I_{\Delta n}=0.03-0.1-0.3-0.5-1-3 \text{ A}$ Delay time $t_{re}=10-60-150-300-450 \text{ ms}$	NZM1 N(S)1	3 pole	NZM1-XFIU 104611	
	NZM1-4 N1-4	4 pole	NZM1-4-XFIU 104614	

Mounting below up to 250 A


 Pulse-current sensitive according to core-balance principle
For 4 pole circuit-breaker NZM2-4 and switch-disconnector N2-4
Internal voltage supply $U_n=280 \dots 690 \text{ V } 50/60 \text{ Hz}$




Rated fault current $I_{\Delta n}=0.03 \text{ A}$	NZM2-4 N2-4	4 pole	+NZM2-4-XF130 292343	1off
	NZM2-4 N2-4	4 pole	+NZM2-4-XFI 292344	
Rated fault current $I_{\Delta n}=0.03-0.1-0.3-0.5-1-3 \text{ A}$ Delay time $t_{re}=10-60-150-300-450 \text{ ms}$	NZM2-4 N2-4	4 pole	+NZM2-4-XF130 292343	
	NZM2-4 N2-4	4 pole	+NZM2-4-XFI 292344	

Auxiliary contacts (1 N/O, 1 NC built-in) are reset with the reset button.
Not in combination with plug-in units, insulated enclosure or main switch assembly kit for side wall installation with mounting bracket.

Rated ultimate short-circuit breaking capacity is determined by fitted NZM2 and, when using a switch-disconnector N2, by the back-up fuse used → Technical data.
Adjusting buttons can be sealed.

 Core-balance principle with AC/DC current sensitivity (in range 0...100 kHz)

For 4 pole circuit-breaker NZM2-4 and switch-disconnector N2-4
Internal voltage supply $U_n=50 \dots 400 \text{ V}$



Rated fault current $I_{\Delta n}=0.03 \text{ A}$	NZM2-4 N2-4	4 pole	+NZM2-4-XFIA 292346	1off
	NZM2-4 N2-4	4 pole	+NZM2-4-XFIA30 292345	
Rated fault current $I_{\Delta n}=0.03-0.1-0.3-0.5-1-3 \text{ A}$ Delay time $t_{re}=10-60-150-300-450 \text{ ms}$	NZM2-4 N2-4	4 pole	+NZM2-4-XFIA 292346	
	NZM2-4 N2-4	4 pole	+NZM2-4-XFIA30 292345	

Observer response threshold dependence on frequency!
See "Frequency response" characteristic curve.
Adjusting buttons can be sealed.

NZM3, NZM4, PFR-...


1

	For use with	Part no. suffix Article no. for ordering with basic device	Price See price list	Std. pack	Notes
Earth-fault release, 3 pole, 4 pole					
Not dependent on mains and control voltages $I_n=0.35-0.4-0.5-0.6-0.7-0.8-0.9-1.0 \times I_n$ $t_g=0-20-60-100-200-300-500-750-1000$ ms Not UL/CSA approved	NZM4	+NZM4-XT 266721		1 off	Only suitable for use in conjunction with circuit-breakers with electronic releases. Not in combination with motor-protective circuit-breakers NZM...-ME... Indication of the earth-fault in optional DMI communication module.
	NS4				
	NZM4-4	+NZM4-4-XT 266722		1 off	

Description	Rated current Enerav Motor I_n A I_n A	Part no. Article no.	Price See price list	Std. pack	Notes
-------------	--	-------------------------	-------------------------	-----------	-------

Residual-current relays


Pulsed current sensitive
Rated control voltage: $U_c=230$ V AC (50/60 Hz)
Integrated auxiliary contact (1 C/0)
Ring-type transformer must also be ordered.
Not UL/CSA approved




Rated fault current $I_{\Delta N}=0.03$ A	-	-	PFR-003 285555	1 off	Adjustable fault current: 0.03,0.1,0.3,0.5,1,3,5A Adjustable delay time: 0.02,0.1,0.3,0.5,1,3,5A
Rated fault current $I_{\Delta N}=0.3$ A	-	-	PFR-03 285556		
Rated fault current $I_{\Delta N}=0.03-5$ A Adjustable fault current and delay time Fault current early warning by flashing, red LED	-	-	PFR-5 285557		
	-	-	PFR-5-110AC 116963		

Ring-type transformer

Rated operating voltage: 690 V (50/60 Hz)
Not UL/CSA approved




Internal diameter: 20 mm	50	50	PFR-W-20 285558	1 off	Includes fixing clip for DIN rail mounting
Internal diameter: 30 mm	150	100	PFR-W-30 285559		



Internal diameter: 35 mm	150	100	PFR-W-35 285600		Includes screwfixing Alternative: fixing clip for DIN mounting rail Note on engineering: The current transformer diameter must be selected 1.5 times larger than the envelope diameter of the passed through conductor
Internal diameter: 70 mm	400	200	PFR-W-70 285601		
Internal diameter: 105 mm	600	250	PFR-W-105 285602		
Internal diameter: 140 mm	1200	630	PFR-W-140 285603		
Internal diameter: 210 mm	1800	800	PFR-W-210 285604		


Magnetic shielding

Not UL/CSA approved



PFR-W-35	-	-	PFR-WMA-35 286001	1 off	Required for load circuits with high inrush currents >4 x I_n , e.g. motors and capacitors.
PFR-W-70	-	-	PFR-WMA-70 286002		
PFR-W-105	-	-	PFR-WMA-105 286003		
PFR-W-140	-	-	PFR-WMA-140 286004		
PFR-W-210	-	-	PFR-WMA-210 286005		

Mounting clip




For the DIN rail mounting current transformers PFR-W-35 and larger	-	-	PFR-WC 286006	1 off	1 set=2 off
--	---	---	-------------------------	-------	-------------

1.6 Circuit-breakers, switch-disconnectors

Components for energy metering and communication

1 Description

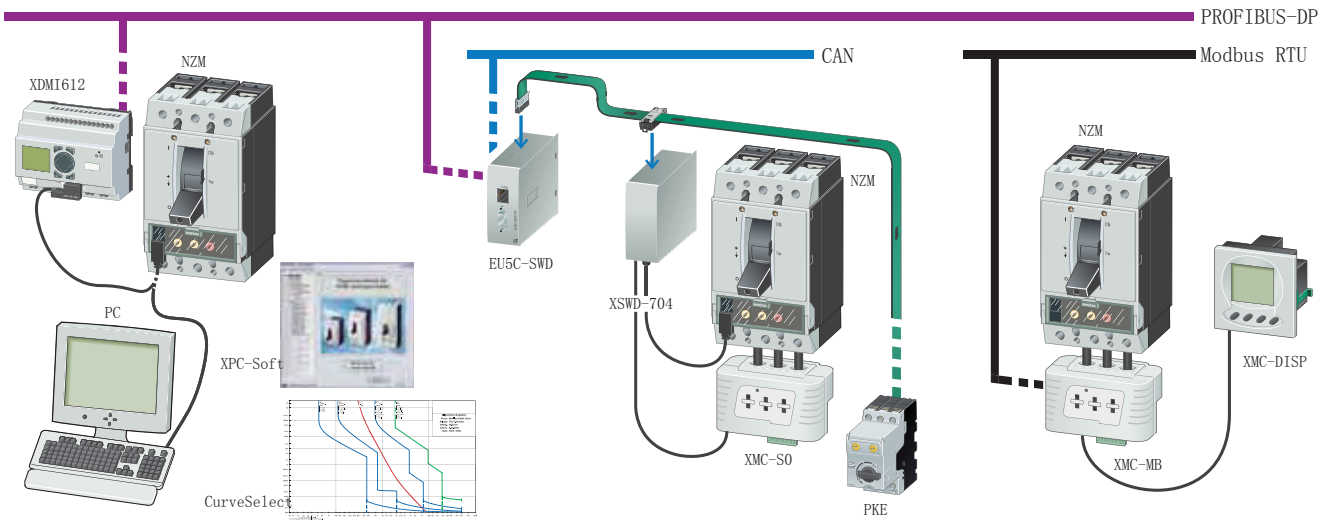

Overview

For the compact circuit-breakers NZM Eaton supplies the following energy measurement and communication components:

- NZM-XPC-Soft: Diagnostics software
- CurveSelect: Software for viewing characteristic curves
- NZM-XMC-S0: Energy measuring module
- NZM-XMC-MB: Measuring and communication module
- NZM-XSWD-704: Communication interface for SmartWire-Darwin with SO input for energy data
- NZM-XDM1612: Data management interface with field bus connection for PROFIBUS-DP and bus diagnostics software

XPC-Soft

Circuit-breakers NZM with electronic trip block provide all required diagnostics data directly to the USB or COM interface of a connected PC through a built-in interface.

On overload or short-circuit, the NZM instantly switches off the system and, if a PC is connected, documents the events complete with date and time. With the software XPC-Soft, users can view the history and analyze possible causes. The software can also output power consumption trend graphs as MS Excel table

CurveSelect

The free characteristic curve program Moeller CurveSelect allows a settings-specific representation of the tripping characteristics of several protective devices with the same time and current scales.

This clearly simplifies an assessment of the interaction of Eaton's circuit-breakers NZM and IZM, motor-protective circuit-breakers PKZ, overload relays ZB, miniature circuit-breakers, and LV h.v.c. fuses. Available for free download from www.moeller.net:

Products & Solutions > Power Distribution > Switching and Protecting Power > CurveSelect: Characteristics program for short-circuit- and overload protection.

Measuring and communication module

For measuring and optimizing energy consumption, Eaton provides module NZM-XMC. This compact device with built-in current converter determines the power and energy values per phase from the measured voltage and current. The module can operate the circuit-breaker through a remote operator. The data is made available on the MODBUS RTU.

With the XMC applications up to 500 A can be operated; the readings have a high accuracy of 0.5 %. Cables, strip or bar can be used. The conductors pass through a tunnel in the device and do not have to be severed. An optional external door display provides real-time local indication of the measured values

Communication interface for SmartWire-Darwin

For remote diagnostics of the circuit-breaker, communication module NZM-XSWD-704 is used. With this module, the switch settings, trip causes, and actual currents can be transmitted to a field bus through SmartWire-Darwin. The circuit-breaker can therefore also be operated through SmartWire-Darwin, like the electronic motor protection PKE and the typical devices such as RMQ and D比.

As a special feature, the XSWD features a built-in power meter, which can be supplied from an external energy measurement module XMC-S0. This provides everything that is necessary for optimizing energy usage.

With the data from the XSWD-704 all relevant information about energy supply or the respective outgoing on the desired field bus are available. This allows visualization and logging of the machines or system components. For visualization, the free software BreakerVisu can, for example, be used, available for download from www.moeller.net:

www.moeller.net, Products & Solutions > Power Distribution > Switching and Protecting Power Distribution > Moeller BreakerVisu: Visualization for circuit-breakers

Data Management with PROFIBUS-DP interface

An alternative to the XSWD-704 is provided by data management interface NZM-XDM1612 with a field bus connection for PROFIBUS-DP. The advantages of this solution are:

• For motor starter applications a ZMR function is available that does not trip the circuit-breaker in the event of an overload but that deactivates the contactor through the DMI.

• The built-in display provides a local indication of all parameters of the circuit-breaker.

• The DMI can change the circuit-breakers' tripping parameters. (remote parameterization)







• The DMI's six inputs and six outputs can be used for remote control and for any user functions.

• Through the outputs a "Tripped" signal can be issued locally.

• A central diagnosis across the entire bus to the FDT standard can be implemented through the DMI with the DPV1 module. For this purpose, software NZM-XPC-DTM and, in some cases, FDT-FAVIGATOR are required.

NZM2, NZM3, NZM4

1

Description	Part no. Article no.	Price See price list	Std. pack	Notes
Diagnostics and configuration software for NZM and DMI (local)				
<p>PC software for direct connection to all new NZM circuit-breakers with electronic releases pEC and UL/CSA devices) or for direct connection to the DMI module, including the required connection cable to NZM.</p> <ul style="list-style-type: none"> • Protection parameter: online display and curve display, export option to curve characteristics program "Moeller CurveSelect". • Warning and release messages: reading of diagnostic memory also in voltage-free state. • Load currents: display and trend indication. • Recording and export options to Excel for load currents and diagnostic messages. • Configuration of the DMI: motor starter, remote operator, assignment of the DMI inputs and outputs and displays. 	NZM-XPC-KIT 265631		1 off	<p>Only for use in combination with circuit-breakers with electronic releases.</p> <p>Download the manual AWB1230-1459 and demo-software at www.moeller.net.</p> <p>Order connecting cable to DMI separately: EASY-USB-CAB.</p>
Connecting cable PC (USB) to DMI				
 <ul style="list-style-type: none"> • For transmission of DMI configuration between PC with XPC-Soft and DMI • For upgrading DMI firmware 	EASY-USB-CAB 107926		1 off	Can also be used for programming easy small controllers.
Data management interface (DMI module)				
 <ul style="list-style-type: none"> • Access to diagnostics and operational data. • Recording current values, motor starter function, and setting parameters. • Control of the circuit-breakers with electronic trip block. • Comprehensive remote diagnostic options and remote operation via fieldbus in combination with a field Bus connection 	NZM-XDMI612 260217		1 off	<p>Includes connection cable NZM-XDM I-CAB between NZM and DM</p> <p>(length: 2 m).</p> <p>Only for use in combination with circuit-breakers with electronic releases</p>
Fieldbus interface for DMI				
 <p>Connection to the DMI module</p> <ul style="list-style-type: none"> • Transfer of phase currents, parameter data, status data and diagnostics data. • Transfer of circuit-breaker position (wiring of auxiliary contacts to DMI inputs. • Actuation of the DMI motor starter functions and the NZM remote operator. • Detection of digital inputs and actuation via field Bus. • PROFIBUS-DPV1-Slave fieldbus interface. Can be operated with class 1 and class 2 masters. Addresses available: 1 to 126 	NZM-XDMI-DPV1 270333		1 off	Connected to the DMI module and has the same contour appearance.
Switched-mode power supply unit				
<p>For DMI module</p>  <ul style="list-style-type: none"> • Rated input voltage: 50/60 HZ: 115/230 V AC • Rated output voltage (residual ripple) 24VDC/13%) • Rated output current: 1.25 A 	EASY400-POW 212319		1 off	
Telescopic adapter				
<p>For DMI module</p> <p>For equalization of the mounting depth when rear mounted in CI-K... enclosures and cabinets</p> 	<p>With 35 mm top-hat rail IEC/EN 60715, adjustable from 75—115 mm. Screw and snap fitting.</p>	M22-TA 226161	<p>1 off</p> 	

Information relevant for export to North America




Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification

IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
E29184
NKCR
012528
3211-03
UL Listed, CSA certified

1.6 Circuit-breakers, switch-disconnectors

Diagnostics, communication

1 NZM, easy

Description	Part no. Article no.	Price See price list	Std. pack	Notes
FDT frame software for operating field devices				
 <p>PC software for integration of software modules (DTM's) according to the FDT standard V1.2 (e.g. NZM-XPC-DTM).</p> <ul style="list-style-type: none"> • Operation of a temporary or stationary service station for engineering, remote diagnostics, remote operation and remote parameter definition of networked switchgear and field devices. • Engineering of the network topology of networked field devices. • Overview representation of the topology with online status information. • Access to the device-specific DTM's for configuration, operation, parameterization and diagnostics of the devices. 	FDT-NAVIGATOR 281623			The connection of the field devices can be implemented via the PROFIBUS DPV1 master or via gateways (e.g.: USB/PRDFIBUS, Ethernet/PROFIBUS). Communication interfacing for the PC and a communication DTM (driver) is necessary for this purpose.
DTM software module to FTD standard				
 <p>PC software module (Device Type Manager) to FDT/DTM standard V1.2 for integration in the FDT navigator or other FDT-capable framework software packages (primary control system, PLC engineering systems).</p> <ul style="list-style-type: none"> • Remote diagnostics, remote monitoring, remote parameter definition and remote operation of the new NZM2,3,4 circuit-breakers with electronic trip release via PRDFIBUS-DPV1. • Indication of the circuit-breaker state (on/off/tripped), the phase currents, parameter data, status data and diagnostics data. • Definition of the trip parameters. • Display and setting the DMI motor starter functions and assignment of the DMI inputs and outputs. <p>Control of the motor starter functions</p>	NZM-XPC-DTM 281624		1 off	For connection of the circuit-breaker to the PRDFIBUS-DP fieldbus, the accessory device NZM-XDM1612 and the fieldbus interface NZM-XDMI-DPV1 are required.
NZM interface module to SmartWire-Darwin				
 <p>The module implements the data connection between the NZM2/3/4 with electronic release and SmartWire-Darwin. The following data is transmitted:</p> <ul style="list-style-type: none"> • Digital status data (ON/OFF/Tripped) • Load warnings • Reason for last trip • The actual currents • Switch model • The current settings of the rotary coding switches <p>The switch can also be operated with a remote operator.</p> <ul style="list-style-type: none"> • Two digital inputs for the switch status • Two transistor outputs for remote switching • Retentive memory for energy data (kWh) <p>Energy data is transmitted through digital input(S) from an external energy measuring module NZN...-XMC-S0.</p>	NZM-XSWD-704 135530		1 off	A connection cable to the circuit-breaker and auxiliary contacts NZM is included as standard.
				+NZM-XMC-MB 135524 +NZM-XMC-1A0 135525 +NZM-XMC-2D0-R 135526 +NZM-XMC-4D0-R 135527 +NZM-XMC-4D 4D0 135528


NZM...-XMC

1

	Number of conductors	Description	For use with	Part no. Article no.	Price See price list	Std. pack	Notes
--	----------------------	-------------	--------------	----------------------	----------------------	-----------	-------

Energy measuring module


Energy measuring module
For measuring the electrical active energy.
The module has three built-in current transformers and three voltage taps, which contacted with self-tapping screws that penetrate the cable insulation.
Power supply 24 VDC
The module supplies SO pulses, which can be counted with an external device.
One pulse output for active energy. The pulse rate is fixed.



3 pole	–		NZM2≤300A	NZM2-XMC-S0 129839	1 off		When mounting, observe the minimum clearanceto circuit-breaker NZM. The module can befittei on the input or output side.
	–		NZM2≤500A	NZM3-XMC-S0 129960	1 off		
4 pole	–		NZM2≤300A	NZM2-4-XMC-S0 129963	1 off		
	–		NZM3≤500A	NZM3-4-XMC-S0 129964	1 off		

Measuring and communication module

For measuring current, voltage, power and energy.
The module has three built-in current transformers and three voltage taps, which are contacted with self-tapping screws that penetrate the cable insulation.
Power supply 24 VDC
Two SO pulse outputs
MODBUS interface (slave)
The total energy consumption value is permanently stored in the module.
Display device NZM-XMC-DISP can be connected for local indication of the readings
Can be extended with up to two add-on cards +NZM-XMC.



3 pole	–		NZM2≤300A	NZM2-XMC-S0 129839	1 off		When mounting, observe the minimum clearanceto circuit-breaker NZM. The module can befittei on the input or output side.
	–		NZM2≤500A	NZM3-XMC-S0 129960	1 off		
4 pole	–		NZM2≤300A	NZM2-4-XMC-S0 129963	1 off		
	–		NZM3≤500A	NZM3-4-XMC-S0 129964	1 off		

Digital display device

For door-mounting (connection to local display)
For all measurement and communication modules with MODBUS interface
Per-phase indication of current, voltage, power and energy values
Includes fixed display configurations



3/4 pole	Front cutout 96 x 96 knockout		NZM...XMC-MB	NZM-XMC-DISP 129967	1 off	–	
----------	----------------------------------	--	--------------	-------------------------------	-------	---	--

Power supply

Power supply 230 V AC



3/4 pole	Can be plugged onto basic device		NZM...XMC-MB	NZM-XMC-AC 129968	1 off	–	
----------	----------------------------------	--	--------------	-----------------------------	-------	---	--

Add-on cards for NZM-XMC modules

Every measurement and communication module can be equipped with up to two expansion cards.

MODBUS interface	–			+NZM-XMC-MB 135524	1 off		Order add-on cards together with basic device. The cards are then supplied readily fitted in the basic device.
Analog outputfor 4-20 mA pointer-type instruments	–			+NZM-XMC-1A0 135525	1 off		
2 relay outputs (changeover contact)	–			+NZM-XMC-2D0-R 135526	1 off		
4 relay outputs (changeover contact)	–			+NZM-XMC-4D0-R 135527	1 off		
4 digital inputs and 4 digital outputs	–			+NZM-XMC-4DI-4DO 135528	1 off		

1.6 Circuit-breakers, switch-disconnectors


Insulated enclosures

NZM-XCI...

1

	Degree of protection	Max. rated uninterrupted current	For use with	Part no. Article no. when ordered separately	Price See price list	Std. pack
Insulated enclosures						
With door coupling rotary handle						
Complete includes all necessary functional parts						
Not UL/CSA approved						


Standard, black/grey



Lockable in 0 position on handle with up to 3 padlocks. Additionally with cover interlock.

IP65	≅ 63A	PN1, N(S)1	NZM1-XCIK5-TVD 271521	1 of
IP65	≅ 63A	NZM1, PN1, N(S)1	NZM1-XCI23-TVD 271522	1 of
IP64	≅ 125A	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XCI43-TVD 271523	1 of
IP64	≅ 160A	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XCI43/2-TVD 104645	1 of
IP64	≅ 200A	NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XCI43-TVD 271524	1 of
IP64	≅ 250A	NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XCI45-TVD 280418	1 of
IP64	≅ 400A	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XCI48-TVD 271525	1 of

Red-yellow for emergency switching off



Lockable on handle and switch with up to 3 padlocks. Lockable in 0 position on handle. Additionally with cover interlock and locking facility on circuit-breaker in 0 position.

IP65	≅ 63A	PN1, N(S)1	NZM1-XCIK5-TVDVR 271526	1 of
IP65	≅ 63A	NZM1, PN1, N(S)1	NZM1-XCI23-TVDVR 271527	1 of
IP64	≅ 125A	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XCI43-TVDVR 271528	1 of
IP64	≅ 160A	NZM1(-4), PN1(-4), N(S)1(-4)	NZM1-XCI43/2-TVDVR 104646	1 of
IP64	≅ 200A	NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XCI43-TVDVR 271529	1 of
IP64	≅ 250A	NZM2(-4), PN2(-4), N(S)2(-4)	NZM2-XCI45-TVDVR 279356	1 of
IP64	≅ 400A	NZM3(-4), PN3(-4), N(S)3(-4)	NZM3-XCI48-TVDVR 271530	1 of

Rated uninterrupted current
 I_n
A

Terminal capacity
mm²

Part no.
Article no. when ordered separately



Price
See price list

Std. pack

Insulated additional terminals

For passing through the neutral and protective conductor

1 pole

	32	Flexible, 1 x 11.5–61	K10/1 093827	10 of
	63	Flexible, 1 x (6–161, stranded, 1 x (16–25)	K25/1 096200	10 of
	100	Flexible, 1 x (10–351, stranded, 1 x (16–50)	K50/1 098573	10 of
	160	Stranded, 1 x (16–95)	K95/1N/BR 012336	10 of
	250	Stranded, 1 x (35–1501, 2x(16–70)	K150/1/BR 014709	10 of
	400	Stranded, 1 x (50–2401, 2 x (25–120)	K240/1/BR 017082	10 of
	630	Stranded, 1 x (240–3001, 2 x (50–240)	K2X240/1/BR 019455	10 of

NZM-XCI...

Basic enclosure
Terminals for 3-pole switches fitted by user for fourth and fifth conductor (N and PE), on 4 pole switches: for fifth conductor (PE)

CI-K5-160-M	K10/1, K25/1
C123-150	K10/1, K25/1
C143-150	K10/1, K25/1, K50/1, K95/1N/BR
C143-200	K10/1, K25/1, K50/1, K95/1N/BR
C143-200	K10/1, K25/1, K50/1, K95/1N/BR, K150/1/BR, K240/1/BR
C145-200	K10/1, K25/1, K50/1, K95/1N/BR, K150/1/BR, K240/1/BR
C148-250	K95/1N/BR, K150/1/BR, K240/1/BR, K2X240/1/BR
CI-K5-160-M	K10/1, K25/1
C123-150	K10/1, K25/1
C143-150	K10/1, K25/1, K50/1, K95/1N/BR
C143-200	K10/1, K25/1, K50/1, K95/1N/BR
C143-200	K10/1, K25/1, K50/1, K95/1N/BR, K150/1/BR, K240/1/BR
C145-200	K10/1, K25/1, K50/1, K95/1N/BR, K150/1/BR, K240/1/BR
C148-250	K95/1N/BR, K150/1/BR, K240/1/BR, K2X240/1/BR

Notes

Enclosures for separate mounting with top and bottom cable entry, suitable for installation of circuit-breakers and switch-disconnectors. Include fixing straps for wall mounting. Short-circuit resistance at 415 V 50/60 Hz up to 10 kA.

Cannot be used in combination with remote operator NZM...-XR plug-in unit NZM...-XSV or withdrawable unit NZM...-XAV. Order insulated additional terminal for 4th or 5th pole separately

Enclosure C I-K5 with hard metric knock-outs
Enclosure CI23 with flanges
C143, CI45 and C148 feature gland plates.

Only for switches with box terminals for direct connection of cables.


1.7

Circuit-breakers, switch-disconnectors

Auxiliary contacts, trip-indicating auxiliary contacts

1

NZM,FAZ-B(C),PKZ Engineering



Incoming circuit-breaker

Outgoing circuit-breaker

Selectivity 415 V AC

between circuit-breakers enables separate shut-down of faulty system sections. Selectivity (discrimination) exists between incoming breaker 1 and outgoing breaker 2 if, only outgoing breaker 2 trips at position 2 during a short-circuit. System sections 3 and 4 continue to be operational.

Incoming circuit-breaker (S1)

NZM...1-A...

NZM...2-A...

I_{cu} [kA]	25(36)(50)(100)							25(36)(50)(150)									
I_n [A]	20-40	50	63	80	100	125	160	20-40	50	63	80	100	125	160	200	250	300

Outgoing circuit-breaker (S2)	I_n [A]	I_{cu} (415V) [kA]	Selectivity threshold I_s [kA] for selectivity between S2 and S1, overload and short-circuit release set to max. value																
			20-40	50	63	80	100	125	160	20-40	50	63	80	100	125	160	200	250	300
FAZ-B(C)...	1	15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
	2	15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
	3	15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
	4	15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
	6	15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
	10	15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	13	15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	PKZMO...	16	15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
		20	15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
		25	15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
32		15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
40		15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
50		15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
63		15	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
0.16		100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
0.25		100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
0.4		100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
PKZ2/ZM-...	0.63	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	1	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	1.6	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	2.5	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
PKZM4...	4	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	6.3	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	10	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	12	50	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	16	50	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	20	50	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	25	50	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	32	50	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	0.6	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	1.0	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	1.6	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	2.4	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	4	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	6	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	10	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
	16	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
25	30	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
32	30	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
40	30	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
16	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
25	100	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
32	50	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
40	50	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
50	50	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
58	50	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	
63	50	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	

Notes T:total selectivity


Incoming circuit-breaker (S1)

NZM...2-VE...			NZM...3-A...				NZM...3-AE...			NZM...3-VE...			NZM...4-AE...			NZM...4-VE...						
50(150)			36(50)(150)				50(150)			50(150)			50(150)			50(150)						
100	160	250	250	320	400	500	250	400	630	250	400	630	630	800	1000	1250	1600	630	800	1000	1250	1600

Prospective short-circuit current (kA). Set the overload and short-circuit release of the incoming circuit-breaker to the max. value.

T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
10	10	10	10	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
10	10	10	10	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
10	10	10	10	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
10	10	10	10	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
8	8	10	10	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
7	7	10	10	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
6	6	10	10	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
6	6	10	10	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
10	10	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
8	8	T	10	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
4	4	5	5	6	9	T	5	13	T	5	13	T	T	T	T	T	T	T	T	T	T
3	3	4	4	4	5	30	4	7	T	4	7	T	T	T	T	T	T	T	T	T	T
2	2	3	3	3	4	10	3	5	20	3	5	20	T	T	T	T	T	T	T	T	T
2	2	3	3	3	4	8	3	3.5	15	3	3.5	15	T	T	T	T	T	T	T	T	T
2	2	2.5	2	3	4	8	2.5	3.5	15	2.5	3.5	15	T	T	T	T	T	T	T	T	T
5	5	6	5	10	13	30	6	16	45	6	16	45	45	T	T	T	T	45	T	T	T
5	5	3.3	5	6	10	15	3.3	10	25	3.3	10	25	25	42	T	T	T	25	42	T	T
4	4	3	4	5	7	12	3	8	18	3	8	18	18	30	45	T	T	18	30	45	T
3	3	3	3	5	7	12	3	8	18	3	8	18	18	30	45	T	T	18	30	45	T
2.5	2.5	3	2.5	5	7	10	3	8	18	3	8	18	18	30	45	T	T	18	30	45	T
2.5	2.5	2.5	2.5	4	6	10	2.5	6.5	15	2.5	6.5	15	15	25	40	T	T	15	25	40	T
2	2	2.5	2	4	6	10	2.5	6.5	15	2.5	6.5	15	15	25	40	T	T	15	25	40	T

1 NZM



Incoming circuit-breaker
Outgoing circuit-breaker

Selectivity 415 V AC

between circuit-breakers enables separate shut-down of faulty system sections.
Selectivity (discrimination) exists between incoming breaker 1 and outgoing breaker 2 if, only outgoing breaker 2 trips at position 2 during a short-circuit.
System sections 3 and 4 continue to be operational.

Incoming circuit-breaker (S1)**NZM...1-A...****NZM...2-A...**

I_{cu} [kA]	25(36)(50)(100)								25(36)(50)(150)								
I_n [A]	20-40	50	63	80	100	125	160	20-40	50	63	80	100	125	160	200	250	300

Outgoing circuit-breaker (S2)	I_n [A]	I_{cu} (415V) [kA]	Prospective short-circuit current (kA). Set the overload and short-circuit release of the incoming circuit-breaker to the max. value.																
			NZM...1-A...								NZM...2-A...								
NZM...1-A...	20-40	25-100	-	-	0.5	0.7	0.8	1.5	1.5	-	-	0.6	0.8	1.5	1.5	1.5	2	3	3
	50	25-100	-	-	-	0.6	0.8	1.5	1.5	-	-	-	0.8	1.5	1.5	1.5	2	3	3
	63	25-100	-	-	-	-	0.8	1.5	1.5	-	-	-	-	1.5	1.5	1.5	2	3	3
	80	25-100	-	-	-	-	-	1.5	1.5	-	-	-	-	-	1.5	1.5	2	3	3
	100	25-100	-	-	-	-	-	-	1.5	-	-	-	-	-	-	1.5	2	3	3
	125	25-100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	3	3
	160	25-100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	3	3
NZM...2-A...	20-40	25-150	-	-	0.5	0.6	0.8	1	1	-	-	0.5	0.6	0.8	1	1.2	1.6	2	2
	50	25-150	-	-	-	0.6	0.8	1	1	-	-	-	0.6	0.8	1	1.2	1.6	2	2
	63	25-150	-	-	-	-	0.8	1	1	-	-	-	-	0.8	1	1.2	1.6	2	2
	80	25-150	-	-	-	-	-	1	1	-	-	-	-	-	1	1.2	1.6	2	2
	100	25-150	-	-	-	-	-	-	1	-	-	-	-	-	-	1.2	1.6	2	2
	125	25-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.6	2	2
	160	25-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	2
	200	25-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	250	25-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NZM...1-M...	40	25-150	-	-	-	-	0.8	1	1	-	-	-	-	-	-	1.2	1.6	2	2
	50	25-150	-	-	-	-	-	-	1	-	-	-	-	-	-	1.2	1.6	2	2
	63	25-150	-	-	-	-	-	-	1	-	-	-	-	-	-	1.2	1.6	2	2
	80	25-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.6	2	2
NZM...2-M...	100	25-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	2	-
	20-12	25-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	160	25-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NZM...2-VE...	200	25-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	100	25-150	-	-	-	-	-	-	-	-	-	-	-	-	-	1.2	1.6	2	2
	160	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NZM...2-ME...	250	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	90	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	1.2	1.6	2	2
	140	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NZM...3-AE...	220	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	250	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	320	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NZM...3-VE...	400	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	500	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	630	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NZM...3-ME...	250	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	400	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	630	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NZM...4-AE...	220	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	350	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	450	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	630	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NZM...4-VE	800	50-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1000	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1250	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1600	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	630	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NZM...4-ME...	800	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1000	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1250	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1600	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NZM...4-ME..	550	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	875	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1400	50-85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Notes T: total selectivity

1 NZM1, NZM2, NZM3

Protection of PVC insulated cables against thermal overload due to short-circuits

According to VDE 0100 Part 430 Wiring Regulations, cables and conductors must be protected from overload and short-circuits. In circuit-breakers NZM, overload protection is implemented through the adjustable, current-dependently delayed overload release.

Short-circuit protection is provided by adjustable instantaneous releases, which open the main contacts in less than 25 ms. The short-circuit total opening time restricts the temperature rise of the cable to a minimum.

The tables indicate the minimum conductor cross-section reliably protected by circuit-breakers during a short-circuit. (Operating voltage $U_N = 415$ V)

	Minimum protected cross-section mm ² copper
NZM...1(-4)-...20	6
NZM...1(-4)-...25 – 160	10
NZM...2(-4)-...20 – 300	10
NZM...3(-4)-...250 – 630	16
NZM...4(-4)-...630 – 1600	95

Backup protection

between incoming circuit-breaker NZM(N)(H) and outgoing circuit-breaker NZMB(N)(H)


Incoming circuit-breaker ①	Incoming circuit-breaker ①														
	NZM1				NZM2				NZM3						
	Up to 160 A				Up to 250 A				Up to 500 A		Up to 630 A				
I_{cc}	I_n	$I_{cu}(415 V)$	I_n	25 kA	36 kA	50 kA	100 kA	25 kA	36 kA	50 kA	150 kA	36 kA	50 kA	150 kA	
	Outgoing circuit-breaker ②														
	$I_{cu}(415 V)$	I_n	NZMB1 25 kA	Up to 160 A	25	36	50	100	25	36	50	100	36	50	100
			NZMC1 36 kA	Up to 160 A	–	36	50	100	–	36	50	100	36	50	100
			NZMN1 50 kA	Up to 160 A	–	–	50	100	–	–	50	100	–	50	100
			NZMH1 100 kA	Up to 160 A	–	–	–	100	–	–	–	100	–	–	100
			NZMB2 25 kA	Up to 300 A	25	36	50	100	25	36	50	150	36	50	150
			NZMC2 36 kA	Up to 300 A	–	36	50	100	–	36	50	150	36	50	150
			NZMN2 50 kA	Up to 300 A	–	–	50	100	–	–	50	150	–	50	150
			NZMH2 150 kA	Up to 300 A	–	–	–	–	–	–	–	150	–	–	150
			NZMC3 36 kA	Up to 500 A	–	–	–	–	–	–	–	–	–	50	150
			NZMN3 50 kA	Up to 630 A	–	–	–	–	–	–	–	–	–	50	150
			NZMH3 150 kA	Up to 630 A	–	–	–	–	–	–	–	–	–	–	150

Where the prospective fault current at the mounting location of circuit-breakers is very high current-limiting circuit-breakers NZMN(H) are normally used. A cost-effective alternative if the fault level is too high for circuit-breakers NZMB(C)(N) is to fit a current-limiting circuit-breaker NZMN(H) upstream of an arrangement of standard circuit-breakers NZMB(C)(N).

The table shows which current-limiting circuit-breakers NZMN(H) provide reliable protection at network locations with high short-circuit ratings in combination with NZMB(C)(N).


The selectivity limit is determined by the response current of the non-delayed short-circuit release in the upstream incoming circuit-breaker. In many applications this is sufficient.

between incoming circuit-breaker NZM...1-A... and outgoing circuit-breaker FAZ-B(C)/PLSM-B(C)...



Outgoing circuit-breaker	Incoming circuit-breaker NZMB1-A...	NZMC(N)(H)1-A...
FAZ-B(C)...		
0.5 – 16	25 kA	30 kA
20 – 40	20 kA	20 kA
50, 63	15 kA	15 kA
PLSM-B(C)...(/...)		
0.5 – 16	25 kA	30 kA
20 – 40	20 kA	20 kA
50, 63	15 kA	15 kA


between incoming circuit-breaker NZM...2-A... and outgoing circuit-breaker FAZ-B(C)/PLSM-B(C)...



Outgoing circuit-breaker	Incoming circuit-breaker NZMB2-A...	NZMN(H)2-A...
FAZ-B(C)...		
0.5 – 10	25 kA	50 kA
13 – 32	25 kA	30 kA
40 – 63	20 kA	20 kA
PLSM-B(C)...(/...)		
0.5 – 10	25 kA	50 kA
13 – 32	25 kA	30 kA
40 – 63	20 kA	20 kA


NZM1, NZM2, NZM3, NZM4

Direction of blow-out

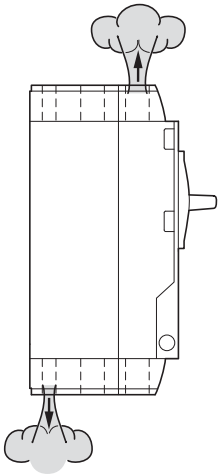

	Top, front	Bottom, rear
NZM1	X	–
NZMB(C)2-A... 250	X	–
(P)N2(-4)-...	X	–
NZMN(H)2...	X	X
NZM...2-4..	X	X
NZM3	X	X
NZM4	X	–

Minimum clearances



between two adjacently mounted switches
Minimum clearance a in mm

	NZM1	NZM2	NZM3	NZM4
NZM1	0	5	5	15
NZM2	5	5	5	15
NZM3	5	5	5	15
NZM4	15	15	15	15



between switches and other parts
Minimum clearances in mm

	b		c		d		
	≦ 690V	1000 V	≦ 440V	≦ 690V	1000 V	≦ 690V	1000 V
NZM1	0	–	30	60	–	0	–
NZM2 ¹⁾	5	5	20 ¹⁾	35 ¹⁾	35	35	35
NZM3	5	5	30	60	60	60	60
NZM4	15	15	50	100 ¹⁾	200	0	0

1) NZMB(C)2 – A ... ≦ 440 V: C = 20 mm, d = 0 mm
≦ 690 V: C = 60 mm, d = 0 mm

2) At 690 V IT network: 200 mm

Tube cable lugs, dimensions

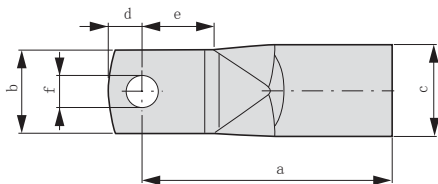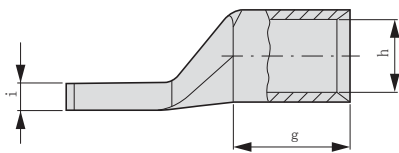

For pressing the cable lugs a press tool K22, HK60/22 or EK22 from Klauke with the following press inserts is required:

- R22/95 for 95 mm²
- R22/120 for 120 mm²
- R22/150 for 150 mm²
- R22/185 for 185 mm²
- R22/240 for 240 mm²

Cable lug	For use with	Nominal cross section mm ²	Terminal bolt Ø	Dimensions in mm								
				a	b	c	d	e	f	g	h	i
KS95-NZM7	NZM2	95	M8	53 ⁺²	23 ^{±0.5}	18 ^{±0.2}	10 ^{±1}	19	8.5	25	13.5	4.4
KS120-NZM7	NZM2	120	M8	56 ⁺²	23 ^{±0.5}	19.5 ^{±0.2}	10 ^{±1}	19	8.5	26	15	4.4
KS150-NZM7	NZM2	150	M8	61 ⁺²	23 ^{±0.5}	21 ^{±0.2}	10 ^{±1}	19	8.5	30	16.5	4.4
NZM2-XKS185	NZM2	185	M8	65 ^{±1.5}	22 ^{±1}	24 ^{±0.3}	9 ⁺¹ _{-0.5}	19 ^{+2.5} _{-0.5}	8.5 ^{+0.05} _{-0.5}	30 ^{±2}	19 ^{±0.4}	7
NZM3-XKS185	NZM3, NZM4	185	M10	65	24.5	24	11.5	18	10.5	30	19	0.7 ^{±0.8}
NZM3-XKS240	NZM3, NZM4	240	M10	72	31	26	11.5	19	10.5	35	21	5.0 ^{±0.8}

1.7

Circuit-breakers, switch-disconnectors


Auxiliary contacts, trip-indicating auxiliary contacts

1 NZM1, NZM2, NZM3, NZ M4 Engineering

Front cut-outs

Cut-out a
Rocker lever

Cut-out b
Rotary handle, remote operator

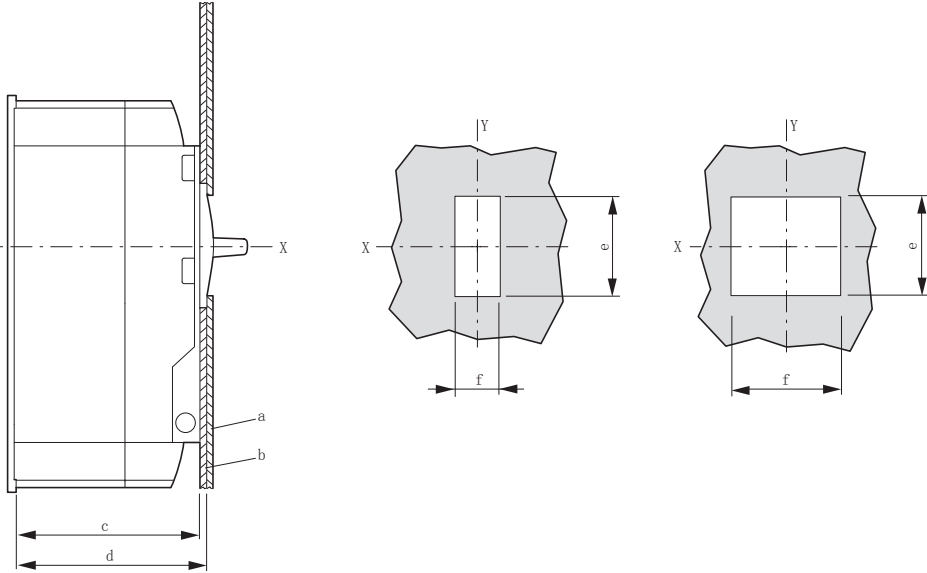


	Distance from mounting plate and door cut-out		Cut-out		Cut-out	
	c	d	e	f	e	f
	mm	mm	mm	mm	mm	mm
NZM1	68	68	68	68	68	68
NZM2	103	103	103	103	103	103
NZM3	120.5	120.5	120.5	120.5	120.5	120.5
NZM4	138	138	138	138	138	138

Contact sequence of the auxiliary contacts

Standard auxiliary contacts (HIN)

Early-make auxiliary contact (HIV)

Trip-indicating auxiliary contacts (HIA)

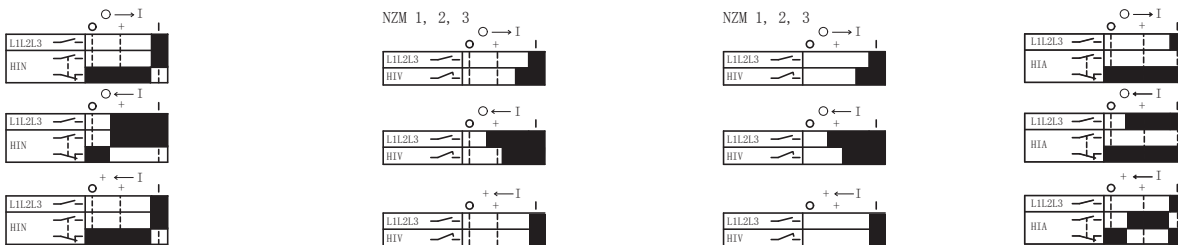

0 → I Switch-on
0 ← I Switch-off
+ ← I Trip


■ Contact closed
□ Contact opened

Notes If early-make contacts are required in combination with shunt undervoltage releases, please select the combination type in section "Releases"

NZM, NZM...-XBZ...

1

Interlock variations and combination possibilities

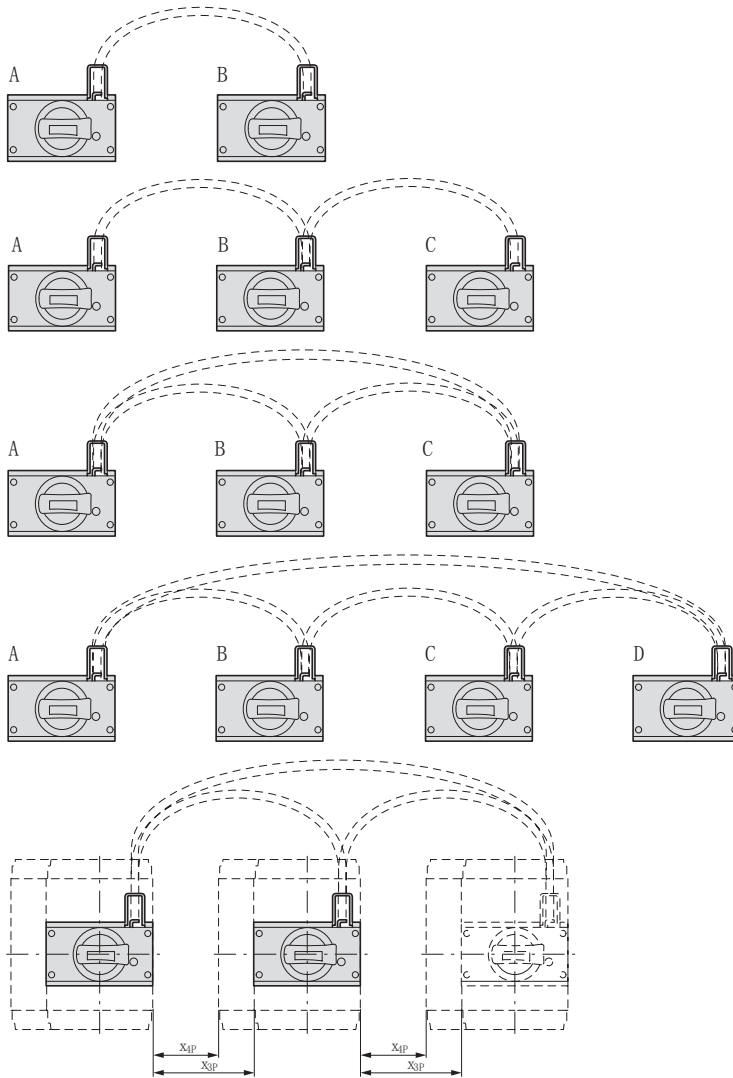

A	B
OFF	OFF
ON/TRIP	ON/TRIP
ON/TRIP	ON/TRIP

A	B	C
OFF	OFF	OFF
ON/TRIP	ON/TRIP	ON/TRIP
ON/TRIP	ON/TRIP	ON/TRIP

A	B	C
ON/TRIP	ON/TRIP	ON/TRIP
ON/TRIP	ON/TRIP	ON/TRIP
ON/TRIP	ON/TRIP	ON/TRIP

A	B	C	D
OFF	OFF	OFF	OFF
ON/TRIP	ON/TRIP	ON/TRIP	ON/TRIP
ON/TRIP	ON/TRIP	ON/TRIP	ON/TRIP

X_{3p} = switch spacing, 3 pole
X_{4p} = switch spacing, 4 pole

NZM-		Right switch							
Max. switch spacing		NZM-1		NZM-2		NZM-3		NZM-4	
		X _{3p}	X _{4p}	X _{3p}	X _{4p}	X _{3p}	X _{4p}	X _{3p}	X _{3p}
Left switch		mm	mm	mm	mm	mm	mm	mm	mm
NZM1	3/4 pole	135	105	120	85	135	90	125	80
NZM2	3/4 pole	135	105	120	85	135	90	125	80
NZM3	3/4 pole	90	75	75	35	85	40	80	45
NZM4	3/4 pole	50	35	40	15	25	-	15	-
NZM-XBZ600		NZM-1		NZM-2		NZM-3		NZM-4	
		X _{3p}	X _{4p}	X _{3p}	X _{4p}	X _{3p}	X _{4p}	X _{3p}	X _{3p}
Left switch		mm	mm	mm	mm	mm	mm	mm	mm
NZM1	3/4 pole	510	480	495	460	510	465	475	405
NZM2	3/4 pole	510	480	495	460	510	465	475	405
NZM3	3/4 pole	460	430	450	410	460	415	460	390
NZM4	3/4 pole	400	370	380	340	400	375	390	320
NZM-XBZ1000		NZM-1		NZM-2		NZM-3		NZM-4	
		X _{3p}	X _{4p}	X _{3p}	X _{4p}	X _{3p}	X _{4p}	X _{3p}	X _{3p}
Left switch		mm	mm	mm	mm	mm	mm	mm	mm
NZM1	3/4 pole	910	880	895	860	910	865	865	795
NZM2	3/4 pole	910	880	895	860	910	865	865	795
NZM3	3/4 pole	820	790	850	810	860	815	860	790
NZM4	3/4 pole	750	720	730	700	800	775	790	720


1.7

Circuit-breakers, switch-disconnectors


Mechanical interlock for remote operator, residual-current relay

1

NZM...-XMVR(L)

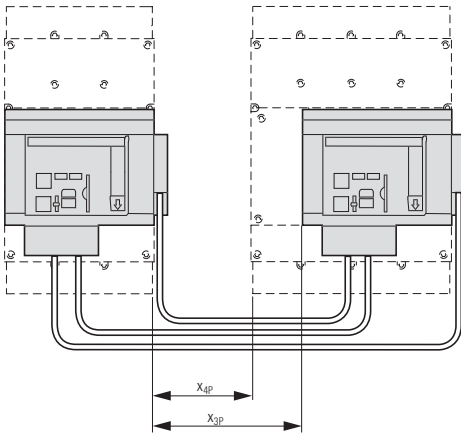


X_{3p} = max. switch spacing 3 pole
 X_{4p} = max. switch spacing 4 pole

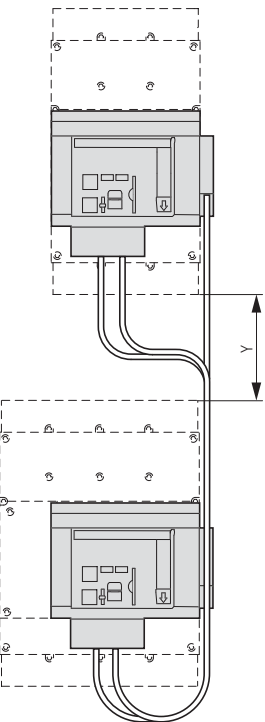

Residual-current relay PFR
 Ring-type transformer PFR-W...

Maximum rated operational current [A]	Power distribution Motor/capacitor	Diameter	
		Transformer part no. PFR-W... d1	Maximum conductor circumference (mm) d2
50	50	20	13
150	100	30	20
150	100	35	23
400	200	70	47
600	250	105	70
1200	630	140	93
1800	800	210	140



Mechanical interlock XMVR

NZM...-XMVR (mounted side-by-side)

Max. switch spacing

		Right switch					
		NZM2		NZM3		NZM4	
		X_{3p}	X_{4p}	X_{3p}	X_{4p}	X_{3p}	X_{4p}
Left switch		mm	mm	mm	mm	mm	mm
NZM2	3/4 pole	130	95	95	50	–	–
NZM3	3/4 pole	–	–	135	90	155	85
NZM4	3/4 pole	–	–	–	–	120	50

Mechanical interlock XMVRL

NZM...-XMVRL (mounted side-by-side, in adjacent enclosures)

Max. switch spacing

		Right switch					
		NZM2		NZM3		NZM4	
		X_{3p}	X_{4p}	X_{3p}	X_{4p}	X_{3p}	X_{4p}
Left switch		mm	mm	mm	mm	mm	mm
NZM2	3/4 pole	350	315	420	385	–	–
NZM3	3/4 pole	–	–	400	365	460	390
NZM4	3/4 pole	–	–	–	–	420	350

Mechanical interlock XMVRL

NZM...-XMVRL (mounted one above the other)

Max. switch spacing

	Switch at	top		
		NZM2	NZM3	NZM4
		3/4 pole	3/4 pole	3/4 pole
		Y	Y	Y
Switch at bottom		mm	mm	mm
NZM2	3/4 pole	220	225	–
NZM3	3/4 pole	–	220	230
NZM4	3/4 pole	–	–	230

Y = max. switch spacing

NZM-XS(R)M, NZM...XRD

Additional terminal arrangement for side wall operator with mounting bracket.
 NZM1-XS(R)M-..., NZM2-XS(R)M-...
 Additional terminals K25, K50, K95, K150
 Actuation:

3 pole


4 pole

For operation on the right

For operation on the left

For operation on the right

For operation on the left

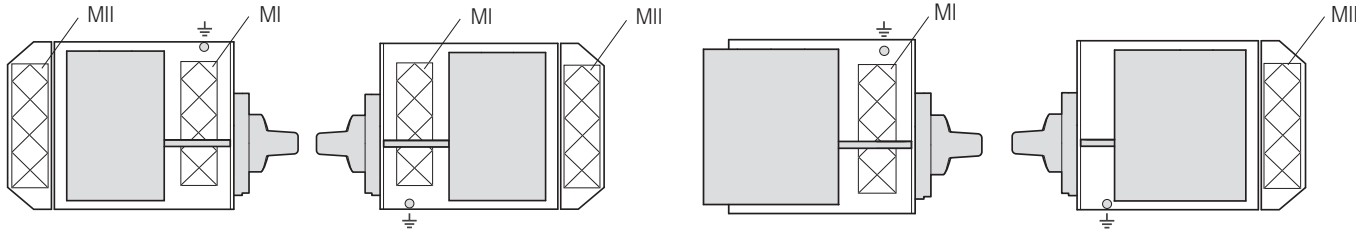


Mounting areas	MI				MII	
	V1	V2	V3	V4	V1	V2
Variation options						
Maximum number of additional terminals	K25	2 x	-	-	-	-
	K50	-	2 x	-	-	-
	K95	-	-	1 x	-	1 x
	K150	-	-	-	1 x	1 x

Example : In mounting area MI, variation option 1 allows the K25 additional terminal to be mounted twice.

2/3-wire control remote operator

Please note for engineering:

Three-wire control




Terminal 70/71:

NZM-XR: Contact loading according to technical data

NZM2-XRD: Full current flows through the contact during make and break!

RMQ series contact elements can be used for the remote operators. NZM2(3.4)-XR(D)...

Two-wire control



Terminal 75:

NZM-XR: Operational readiness signal when cover closed and not locked.


NZM2-XRD: Operational readiness signal when sliding switch set to Auto.

Sliding switch with three positions: Manual/Auto/Locked for reliable differentiation of operating positions.

AC-15: 400 V; 2 A

DC-13: 220 V; 0.2 A

Three-wire control with automatic reset to the 0 position after the switch has tripped



Switching cycle:

NZM2-XRD



NZM2-XR



NZM3-XR




NZM4-XR




The time interval between OFF and ON is 3 seconds.
 ON commands received during the time interval are ignored within the first 3 seconds after switch off.

NZM1, NZM2


System and line protection with NZM1

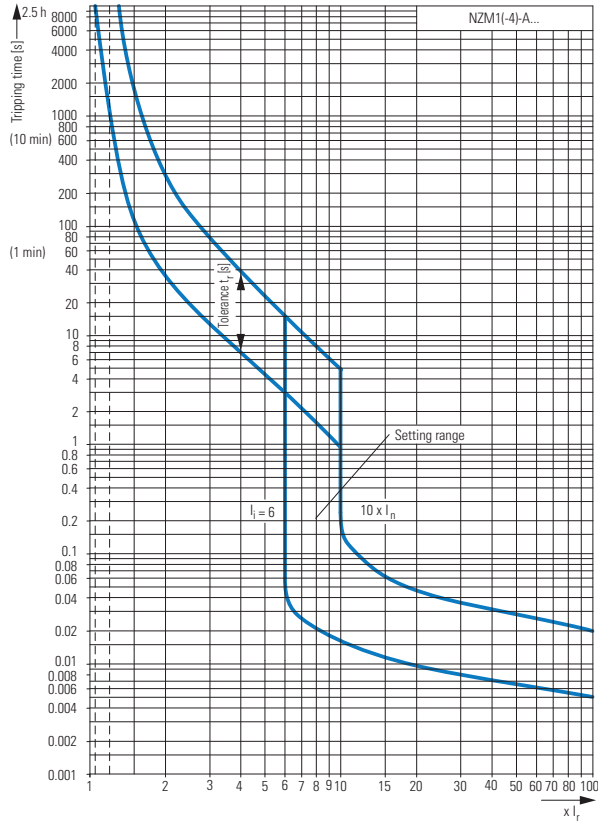


Motor protection with NZM1

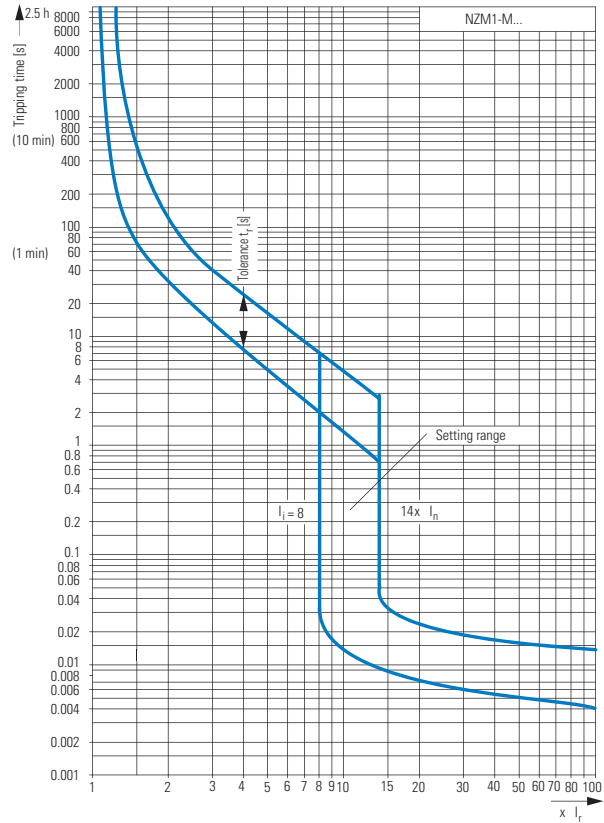

System and line protection with NZM2

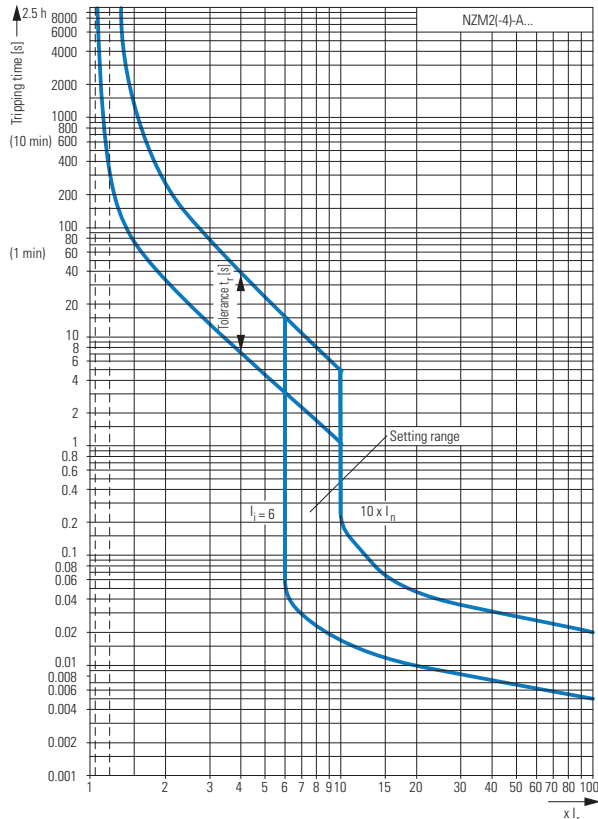

Motor protection with NZM2

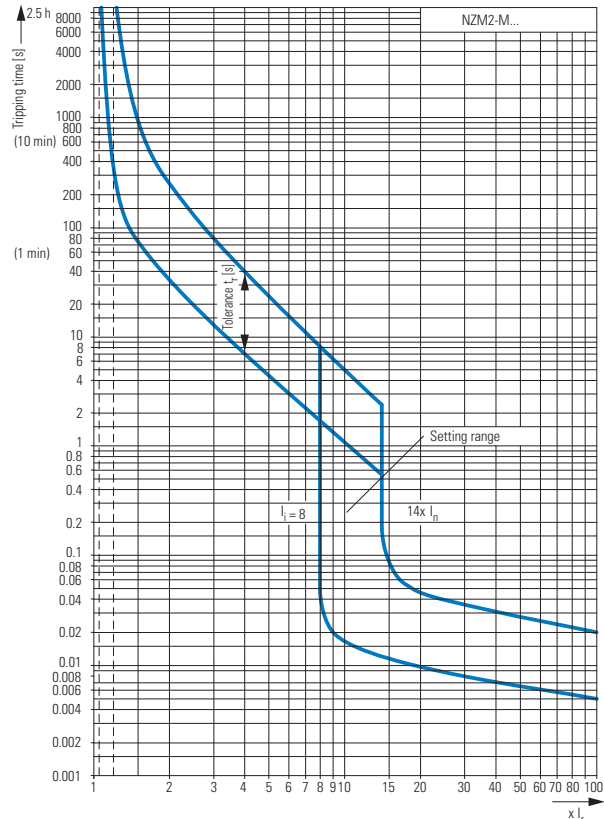


Notes


With the free CurveSelect software you can quickly and easily create detailed representations of individual settings:
www.moeller.net, Products & Solutions>Power Distribution>Switching and Protecting Power Distribution>CurveSelect: Characteristics program.

NZM2, NZM3



Systems, cable, selectivity and generator protection with NZM2

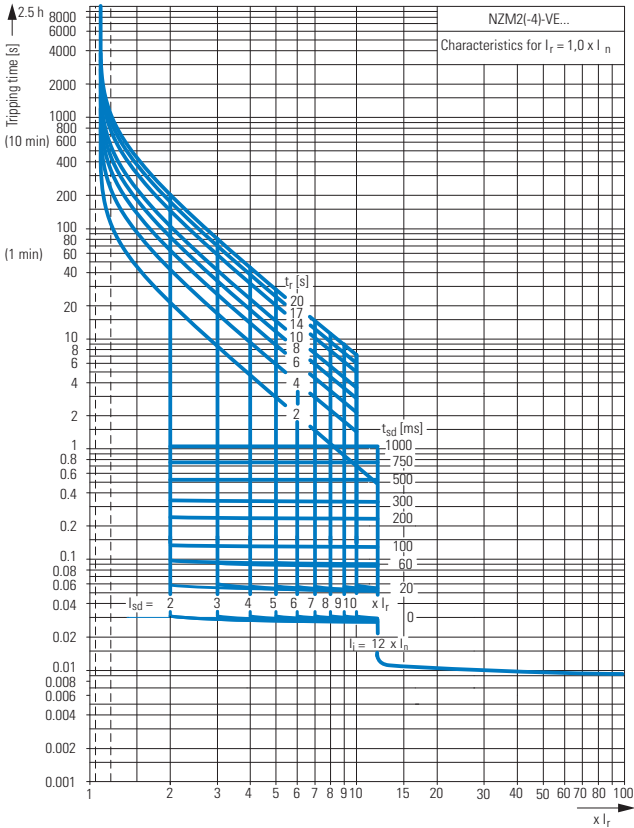

Motor protection with NZM2

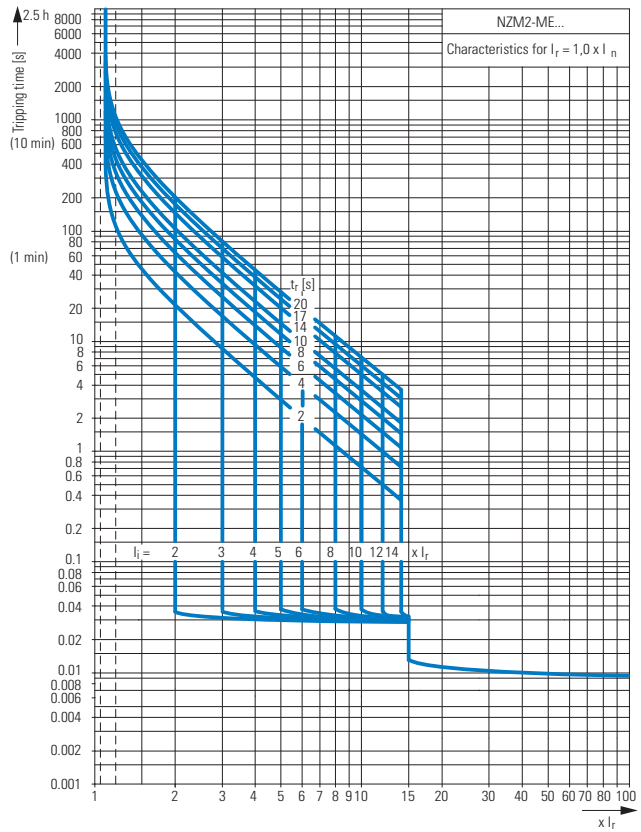

System and line protection with NZM3

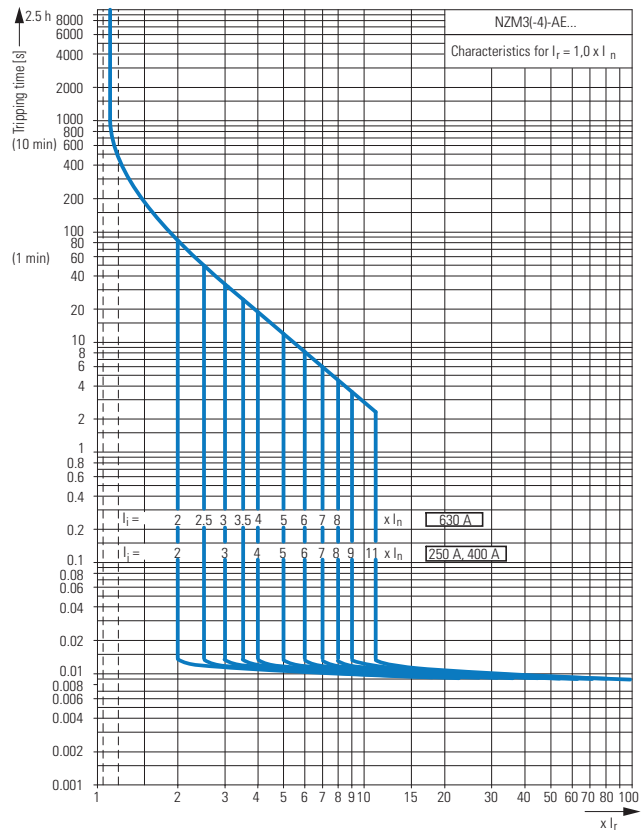
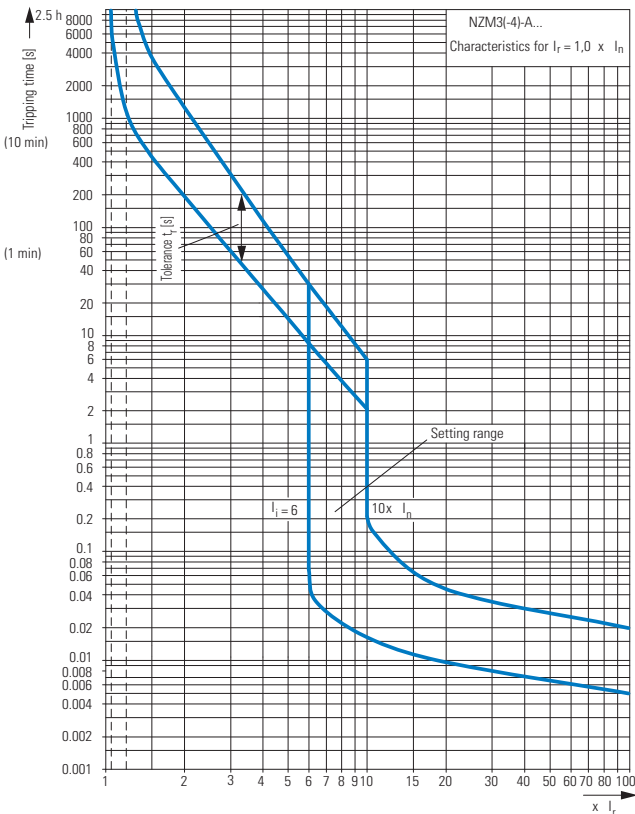


Notes


With the free CurveSelect software you can quickly and easily create detailed representations of individual settings:
www.moeller.net, Products & Solutions>Power Distribution>Switching and Protecting Power Distribution>CurveSelect: Characteristics program

NZM3, NZM4

Systems, cable, selectivity and generator protection with NZM3

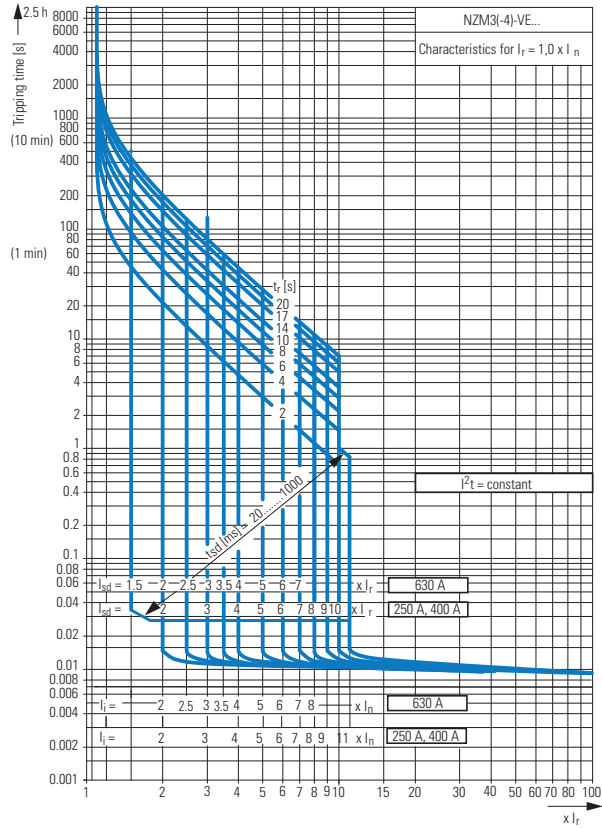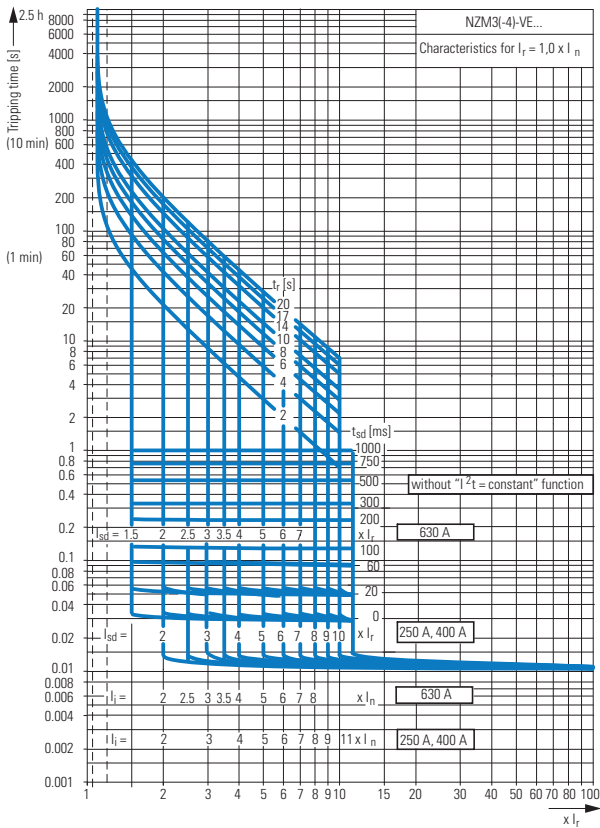


Motor protection with NZM3

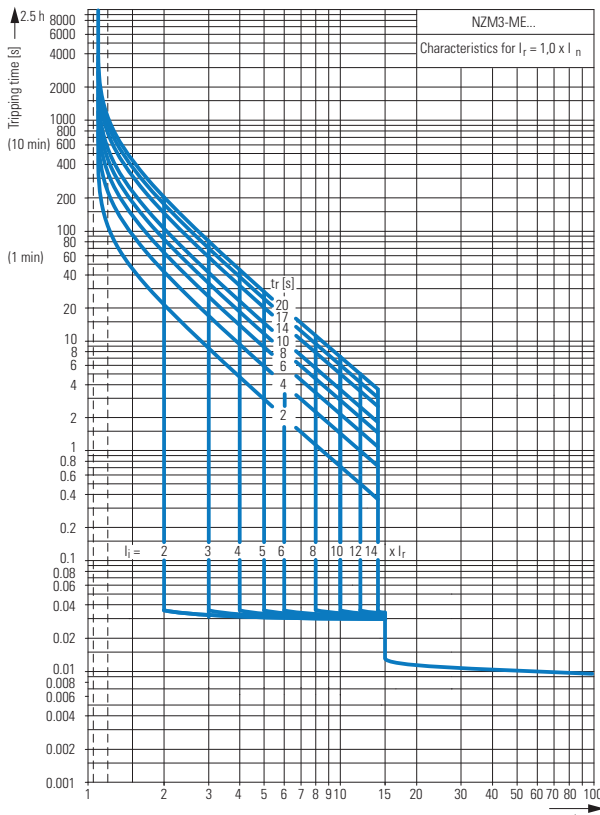


Notes With the free CurveSelect software you can quickly and easily create detailed representations of individual settings:
www.moeller.net, Products & Solutions>Power Distribution>Switching and Protecting Power Distribution>CurveSelect: Characteristics program

NZM4


System and line protection with NZM4

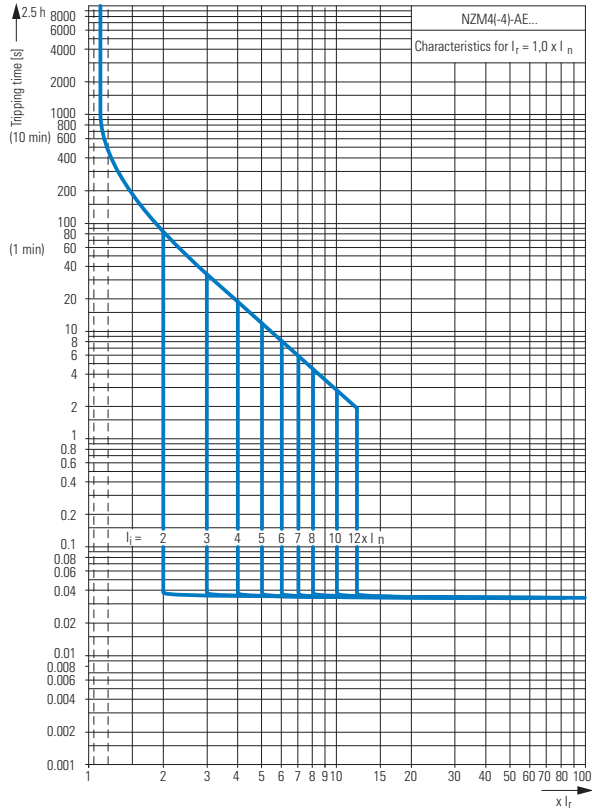


Systems, cable, selectivity and generator protection with NZM4

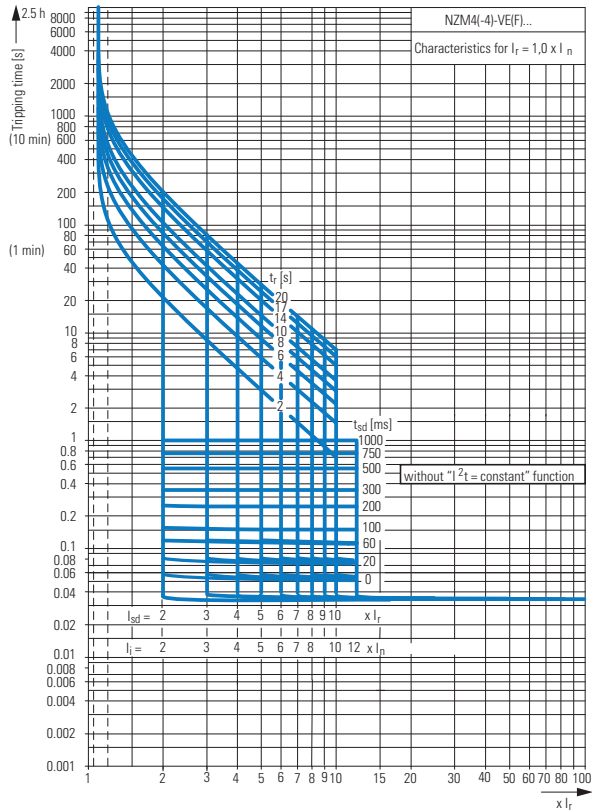

Systems, cable, selectivity and generator protection with NZM4

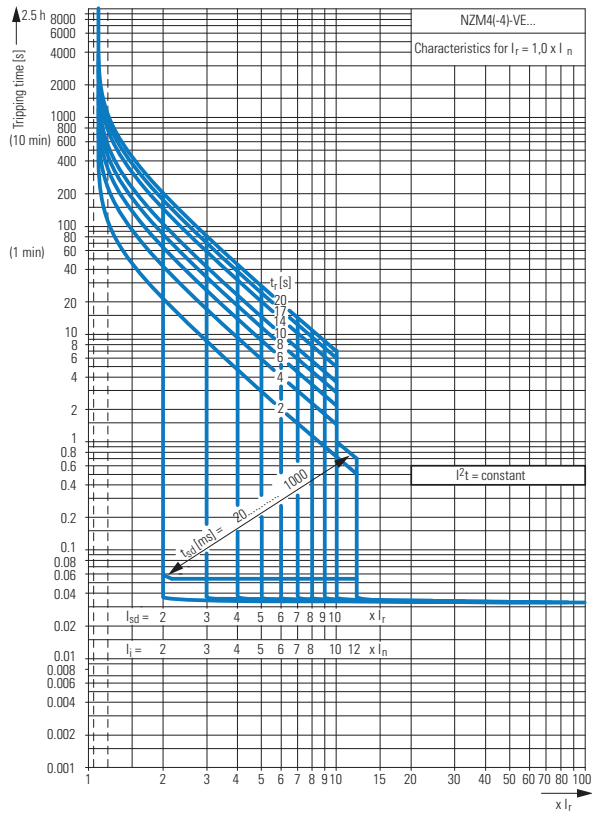

Motor protection with NZM4

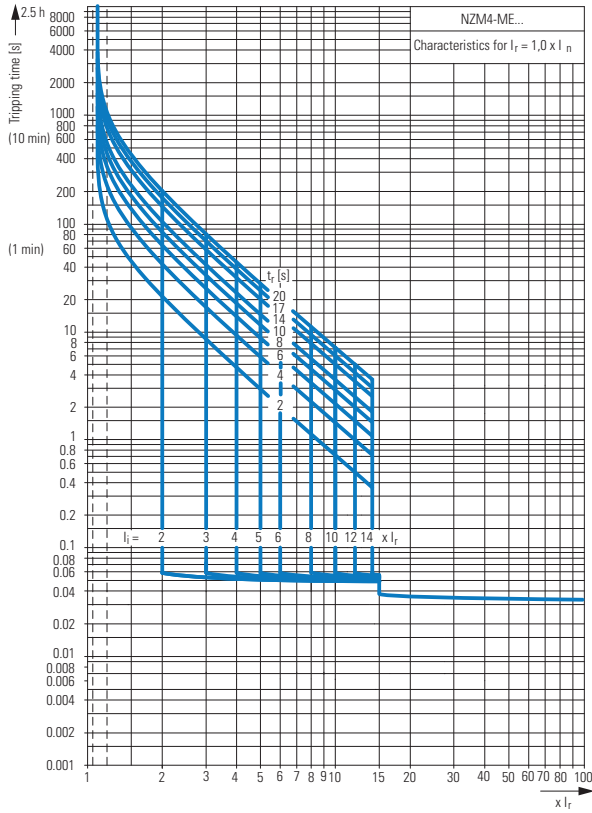

1.7







Circuit-breakers, switch-disconnectors

Construction size 1: let-through characteristics

1










NZM1

Let-through current i_D

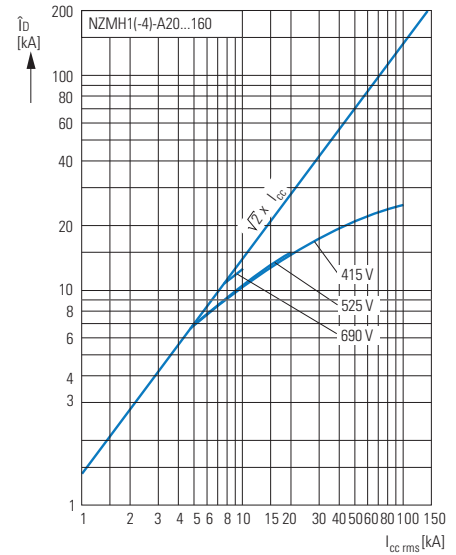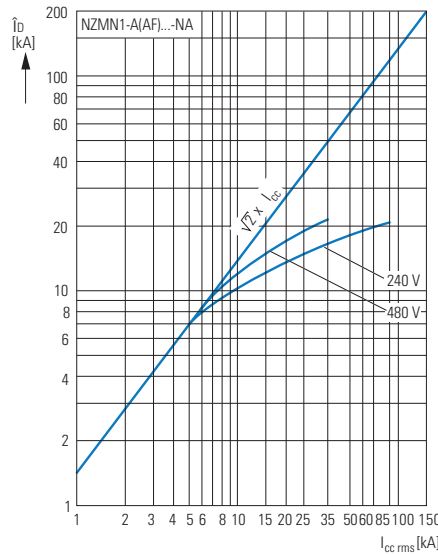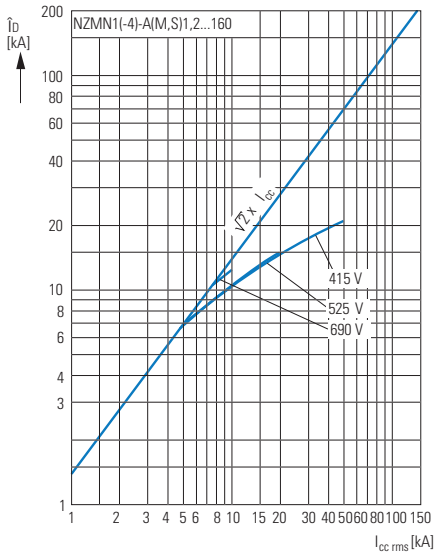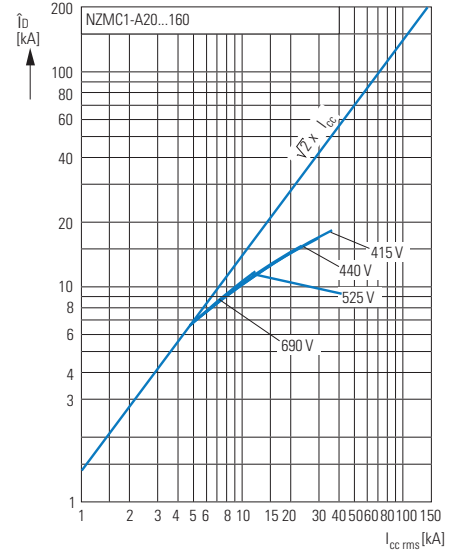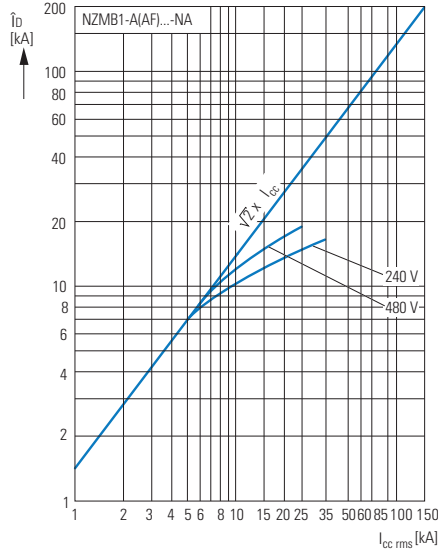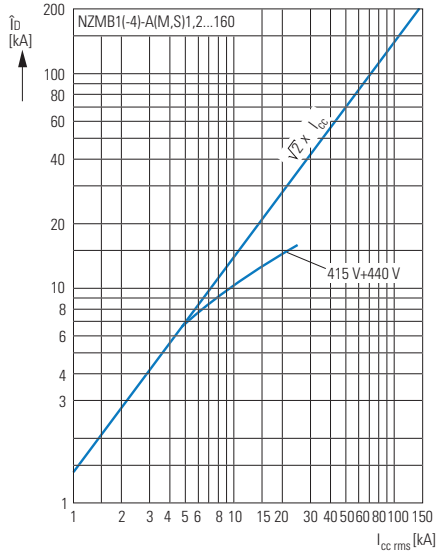

NZM2

Let-through current \hat{i}_D

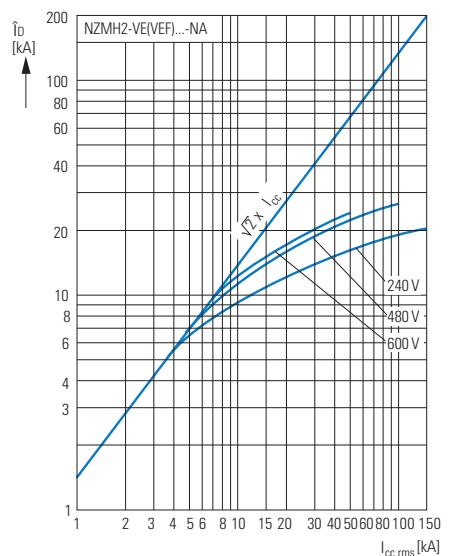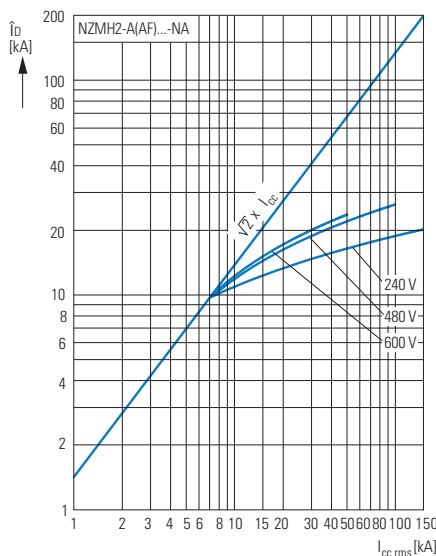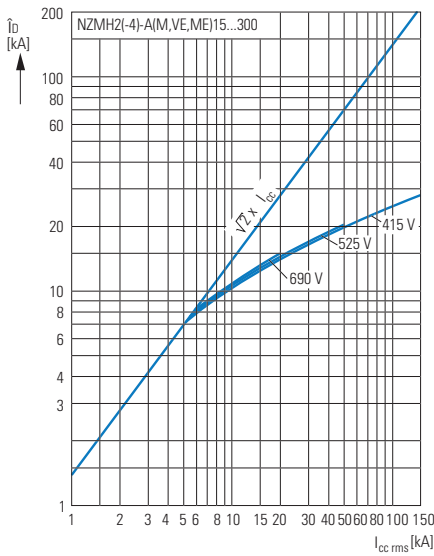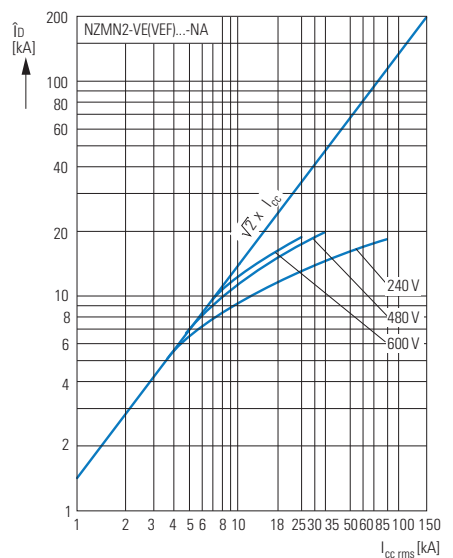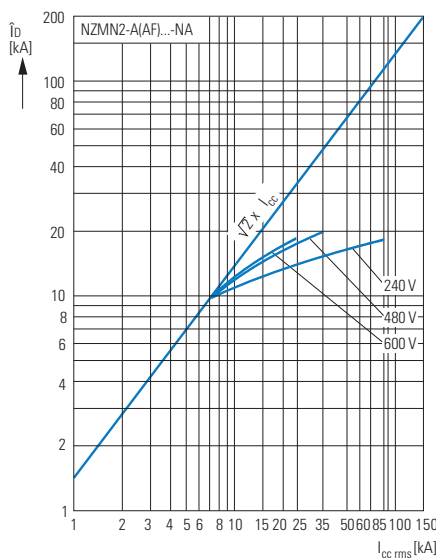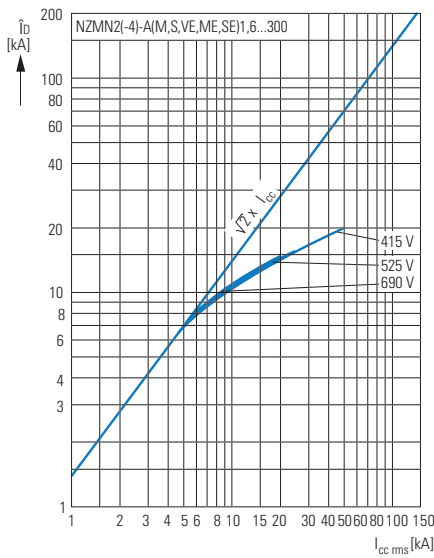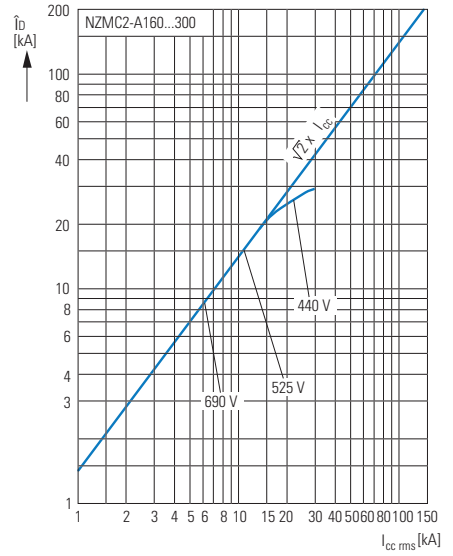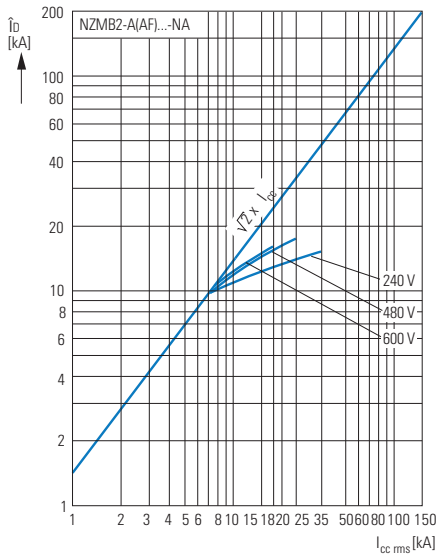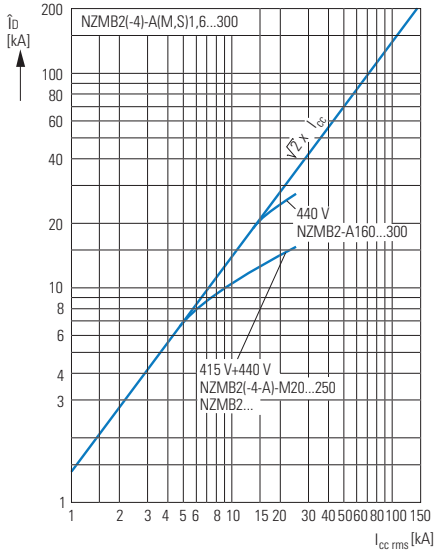

1.7








Circuit-breakers, switch-disconnectors

Construction size 3: let-through characteristics

1







NZM3

Let-through current \hat{i}_D

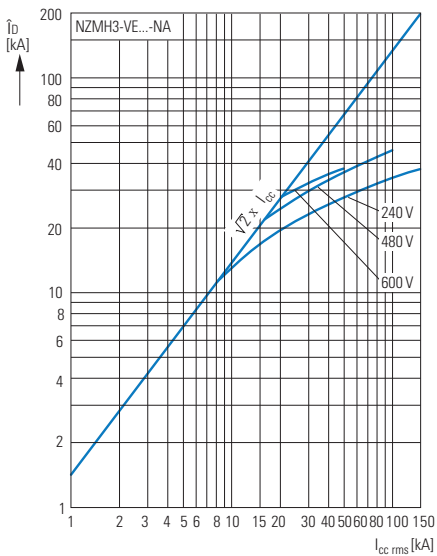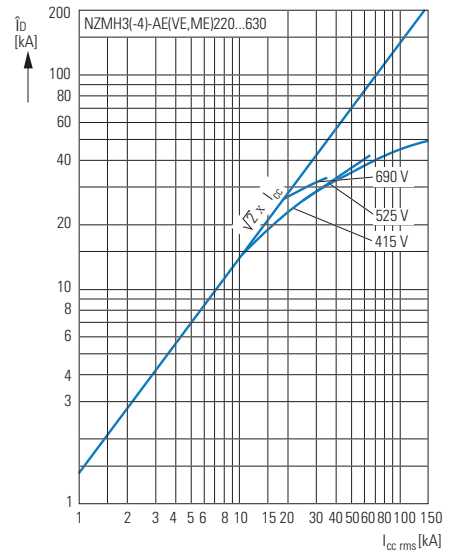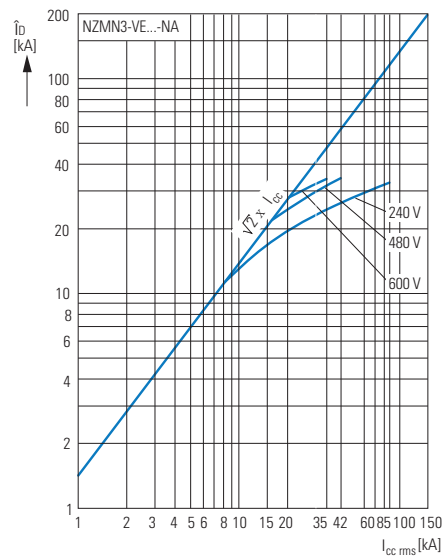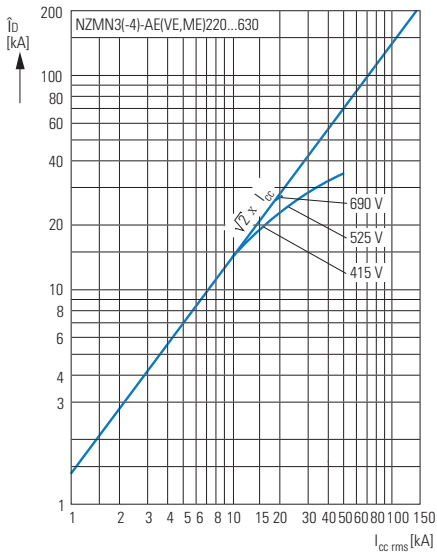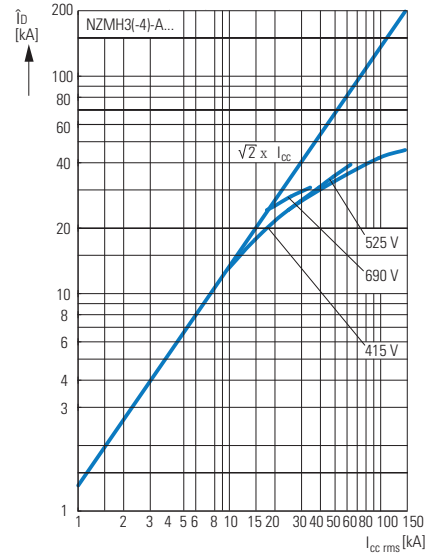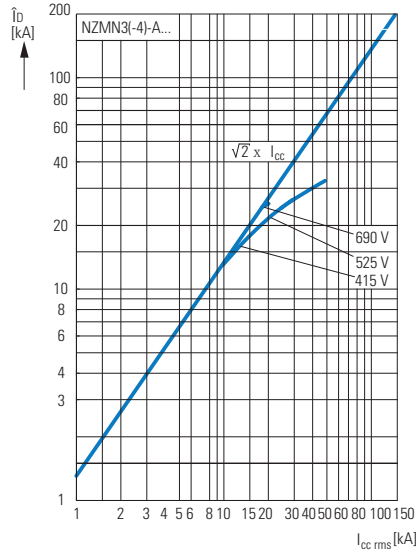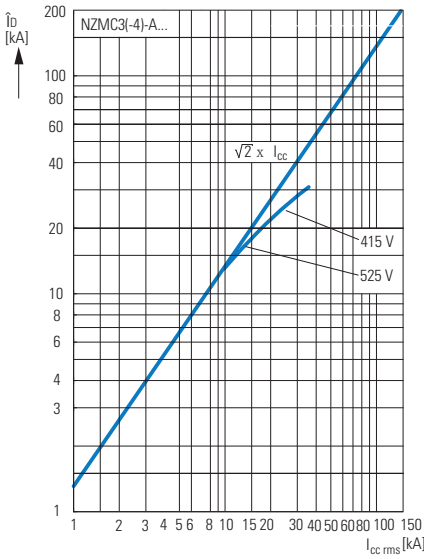

NZM1

Let-through energy $\int i^2 dt$

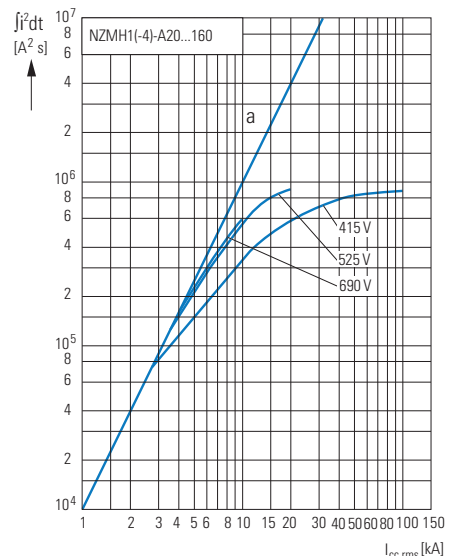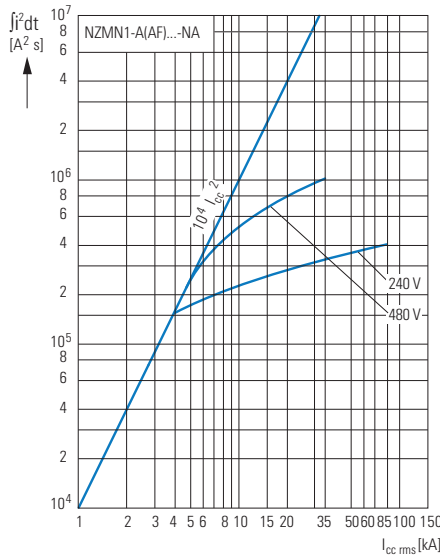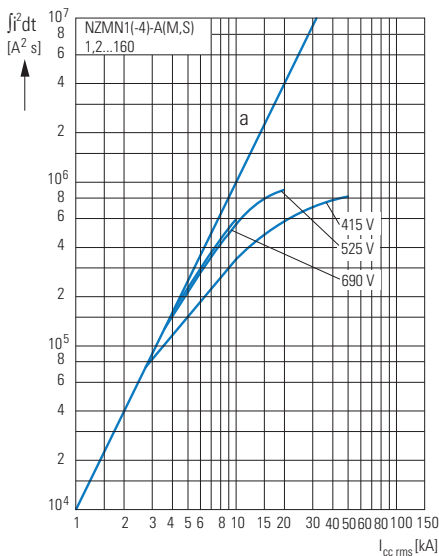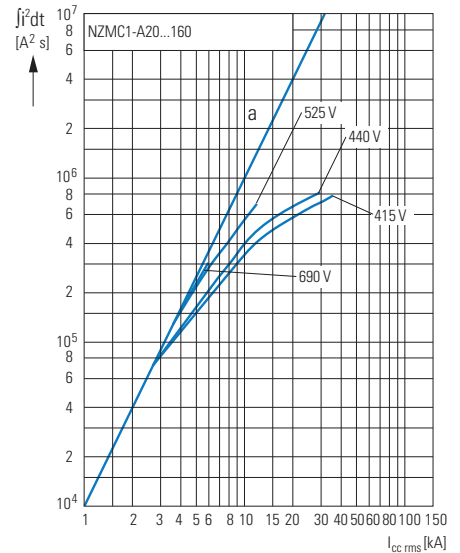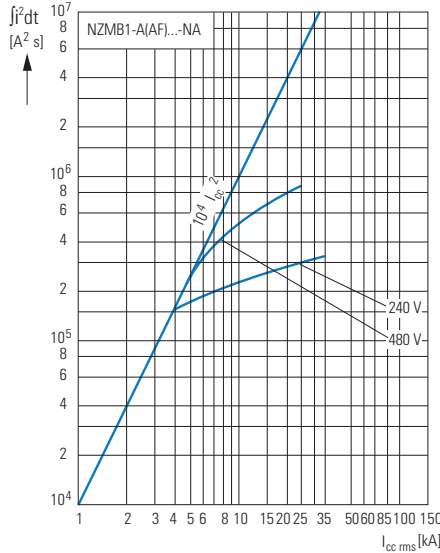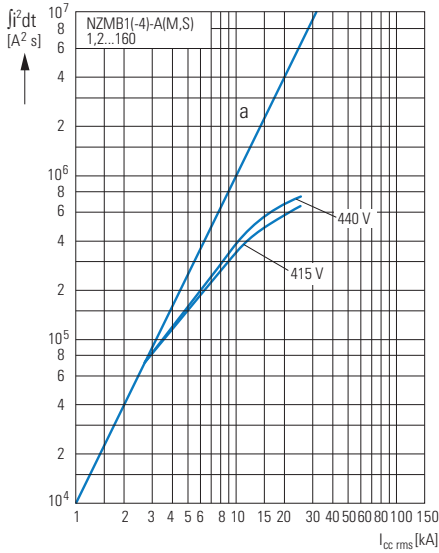

① 1 half-cycle










① 1 half-cycle

1.7 Circuit-breakers, switch-disconnectors

Construction size 2: let-through characteristics

NZM2

Let-through energy I^2t

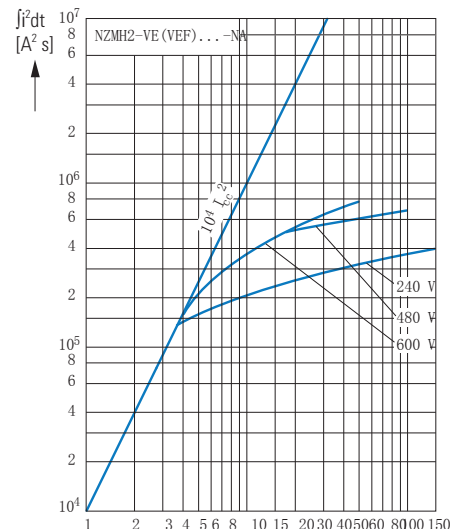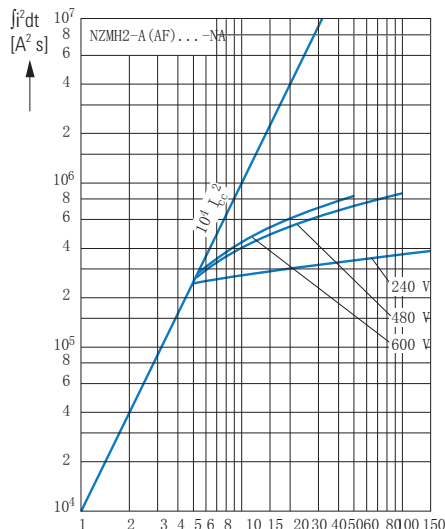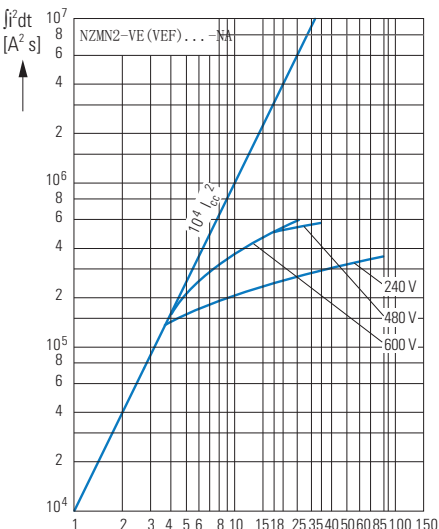
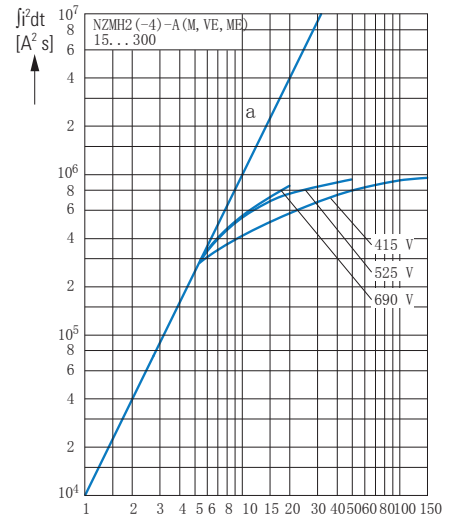
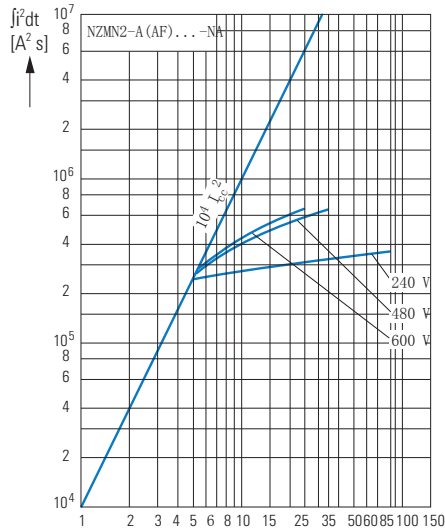
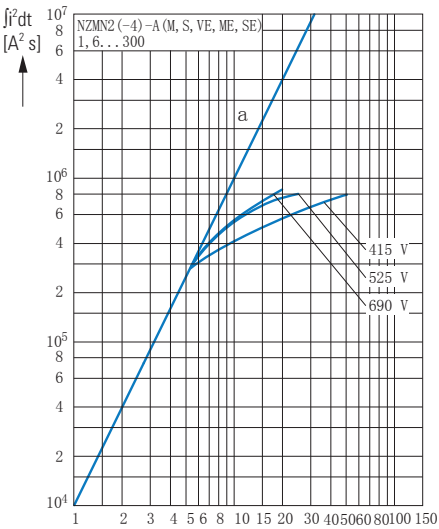
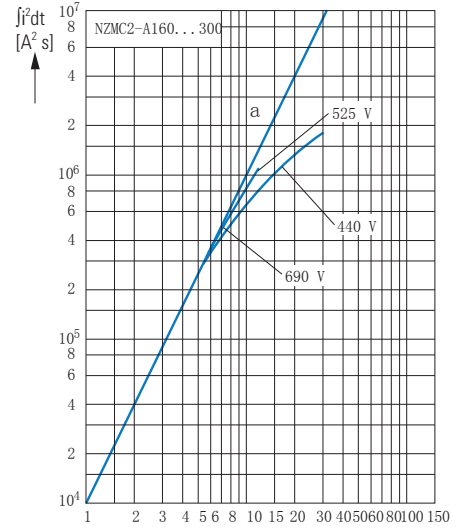
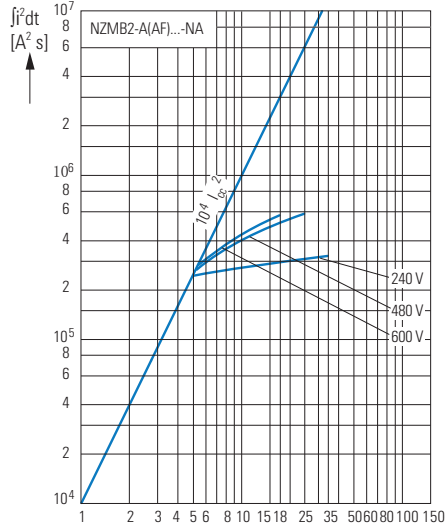
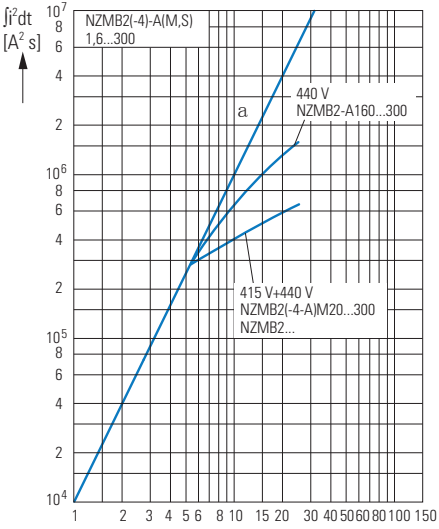


① 1 half-cycle

① 1 half-cycle

NZM3

Let-through energy I^2t

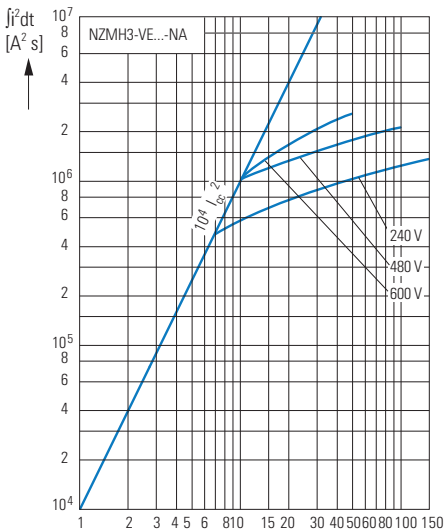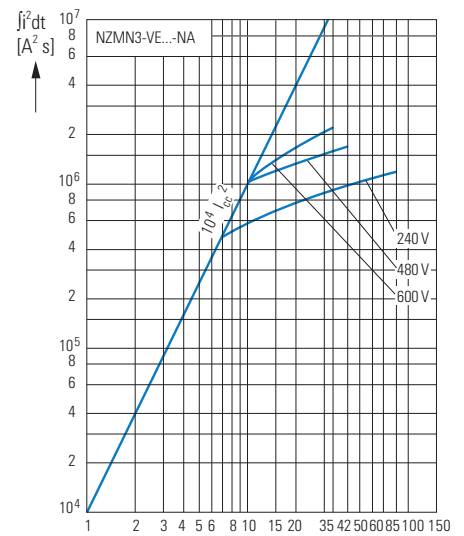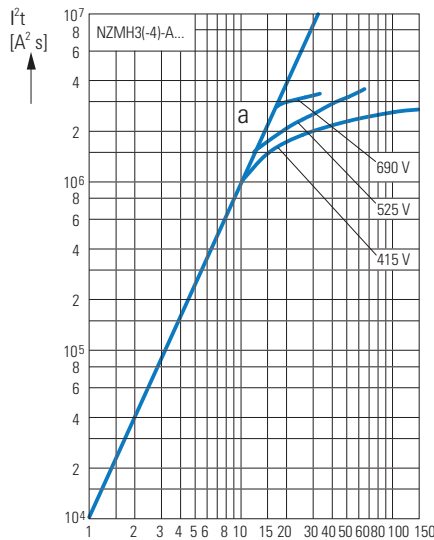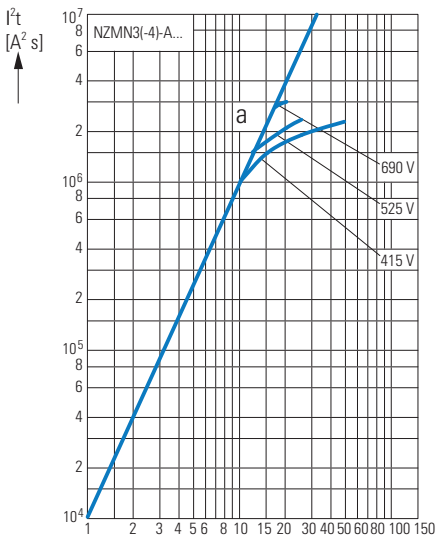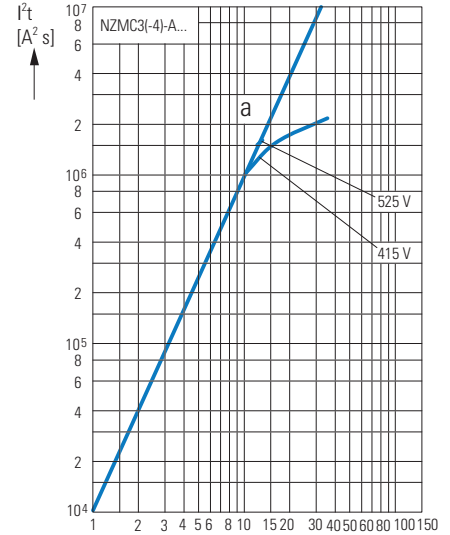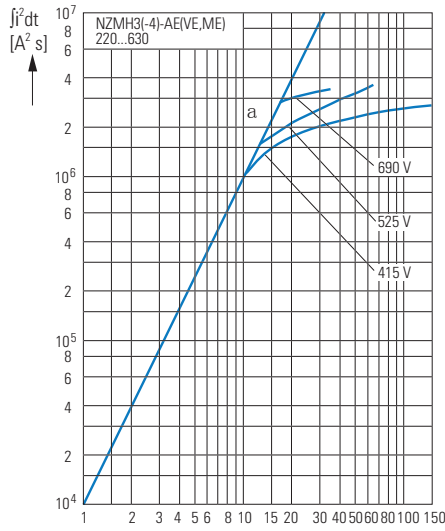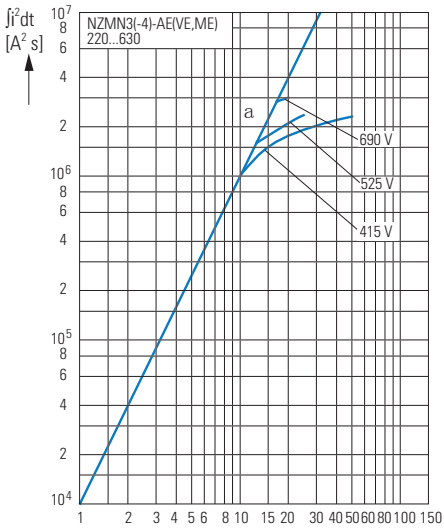


1 NZM2...XFIA

Frequency response


+NZM2-4-XFIA30

30 mA

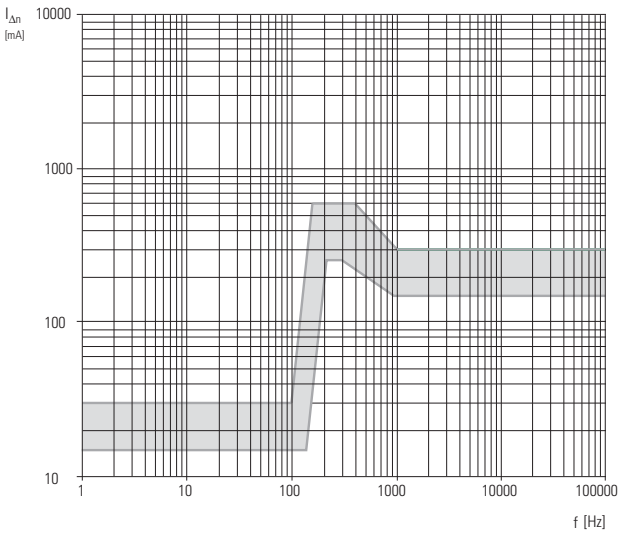


+NZM2-4-XFIA

300 mA

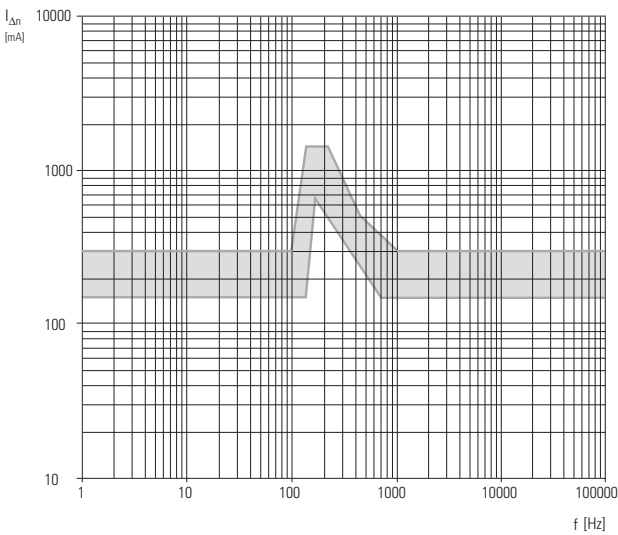


+NZM2-4-XFIA

100 mA

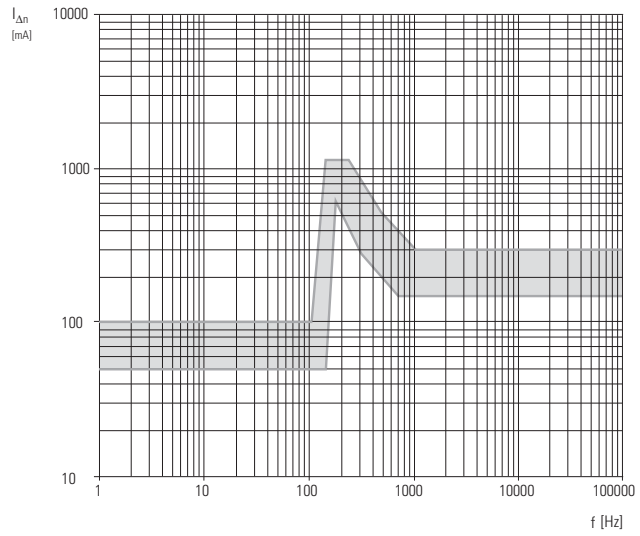

1000 mA

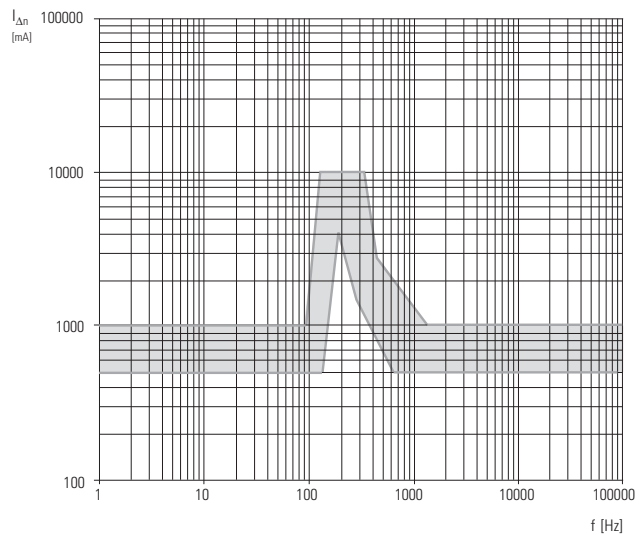


NZM, PN, N, NS

Technical data

General

Standards	IEC/EN 60947 and VDE 0660	
Contact protection	Finger and back-of-hand proof to DIN EN 50274/VDE 0660 Part 514	
Climatic proofing	Damp heat, constant, to IEC 60068-2-78	
	Damp heat, cyclic, to IEC 60068-2-30	
Ambient temperature		
Storage	°C	-25...+70
Operation	°C	-25...+70
Mechanical shock resistance QEC/EN 60068-2-27)	g	20 (half-sinusoidal shock 20 ms)
Safe isolation according to EN 61140		
Between auxiliary contacts and main contacts	VAC	500
Between the auxiliary contacts	VAC	300
Built-in position	Vertical and 90° in all directions	



- With residual-current release XF1:
- NZM1, N1, NZM2, N2: vertical and 90° in all directions
- With plug-in adapter elements
- NZM1, N1, NZM2, N2: vertical, 90° right/left
- With withdrawable unit:
- NZM3, N3: vertical, 90° left
 - NZM4, N4: vertical
- With remote operator:
- NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions

Direction of incoming supply	Any
Degree of protection	
Device	In the area of the HMI devices: IP20 (basic degree of protection)
Enclosure	With insulating surround: IP40 With door coupling rotary handle: IP66
Terminal type	Tunnel terminal: IP10 Phase isolator and cable terminal: IP00

Rated uninterrupted current

max. 160 A		max. 300 A		max. 630 A		max. 1600 A	
NZMB1	NZMC1	NZMN1 NZMH1	NZMB2	NZMC2	NZMN2 NZMH2	NZMC3	NZMN3 NZMH3


Circuit-breaker

Rated impulse withstand voltage U_{imp}											
Main contacts	V	6000	6000	6000	8000	8000	8000	8000	8000	8000	8000
Auxiliary contacts	V	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000
Rated operating voltage	U_o	V AC	440	690	690	440	690	690	690	690	690
		V DC ¹⁾	—	—	500	—	—	750	750	—	—
Overvoltage category/degree of pollution		III/3	III/3	III/3	III/3	III/3	III/3	III/3	III/3	III/3	III/3
Rated insulation voltage	U_i	V	690	690	690	690	1000	1000	1000	1000	1000
For use in IT electrical power networks	V	440	690	690	440	690	690	690	690	525	690 ²⁾

Notes


- Details apply for 3 pole system protection circuit-breaker with thermomagnetic release NZMN(H)1(2)(3)-A... up to 500 A.
For rated operating voltage switching on 3 contacts the following applies
DC correction factor for instantaneous release response value NZM1: 1.25, NZM2: 1.35, NZM3: 1.45
Setting for I_t at DC=setting I_t AC/correction factor DC

Switching of one pole via two series contacts



2)
2)>800 A=525

Switching of one pole via three series contacts



1.8 Circuit-breakers, switch-disconnectors

1

NZM...1, NZM...2, NZM...3, NZM...4

				Max. rated uninterrupted current 160 A			
				NZMB1	NZMC1	NZMN1	NZMH1
Switching capacity							
Rated short-circuit making capacity							
	240 V	I_{cm}	kA	63	121	187	220
	400/415 V	I_{cm}	kA	53	76	105	220
	440 V	I_{cm}	kA	53	63	74	74
	525 V	I_{cm}	kA	–	24	40	40
	690 V	I_{cm}	kA	–	14	17	17
Rated short-circuit breaking capacity I_{cu}							
I _{cu} according to IEC/EN 60947							
Operating sequence O-t-CO							
	240 V 50/60 Hz	I_{cu}	kA	30	55	85	100
	400/415 V 50/60 Hz	I_{cu}	kA	25	36	50	100
	440 V 50/60 Hz	I_{cu}	kA	25	30	35	70
	525 V 50/60 Hz	I_{cu}	kA	–	12	20	20
	690 V 50/60 Hz	I_{cu}	kA	–	8	10	10
	500 V DC ³⁾	I_{cu}	kA	–	–	15	30
	750 V DC ³⁾	I_{cu}	kA	–	–	–	–
Ins according to IEC/EN 60947							
Operating sequence O-t-CO-t-CO							
	240 V 50/60 Hz	I_{cs}	kA	30	55	85	100
	400/415 V 50/60 Hz	I_{cs}	kA	25	36	50	50
	440 V 50/60 Hz	I_{cs}	kA	18.5	22.5	35	35
	525 V 50/60 Hz	I_{cs}	kA	–	6	10	10
	690 V 50/60 Hz	I_{cs}	kA	–	4	7.5	7.5
Maximum LV h.b.c. fuses ⁶⁾							
			A gG/gL	NZM.1-...20...100: 20C NZM.1-...125,160: 315			
Rated short-time withstand current							
t=0.3 s							
		I_{cw}	kA	–	–	–	–
t=1s							
		I_{cw}	kA	–	–	–	–
Utilization category according to IEC/EN 60947-2							
Rated making and breaking capacity							
Rated operational current							
	AC-1	400/415 V 50/60 Hz	I_e	A	160	160	160
		690 V 50/60 Hz	I_e	A	160	160	160
	AC-3	400/415 V 50/60 Hz	I_e	A	160	160	160
		690 V 50/60 Hz	I_e	A	160	160	160
	DC-1 ³⁾	500 V DC	I_e	A	–	–	125
		750 V DC	I_e	A	–	–	–
	DC-3 ³⁾	500 V DC	I_e	A	–	–	125
		750 V DC	I_e	A	–	–	–
Lifespan, mechanical							
Operations							
				20000	20000	20000	20000
of which max. 50% trip by shunt/undervoltage release							
Lifespan, electrical							
	AC-1	400/415 V 50/60 Hz	Operations	7500	7500	10000	10000
		690 V 50/60 Hz	Operations	–	5000	7500	7500
	AC-3	400/415 V 50/60 Hz	Operations	–	–	7500	7500
		690 V 50/60 Hz	Operations	–	–	5000	5000
	DC-1 ³⁾	500 V DC	Operations	–	–	10000	10000
		750 V DC	Operations	–	–	–	–
	DC-3 ³⁾	500 V DC	Operations	–	–	5000	5000
		750 V DC	Operations	–	–	–	–
Max. operating frequency							
				Ops/h	120	120	120
Heat dissipation per pole at I_{uc}							
				W	16.7	16.7	16.7
Total opening delay on short-circuit							
				mS	< 10	< 10	< 10
Technical data that diverge from products for the IEC market							
Switching capacity of NA switch (UL489, CSA 22.2 No. 5-09)							
Short-circuit current rating (SCCR)							
	240 V 60 Hz		kA	35	–	85	–
	480 V 60 Hz		kA	25 ¹⁾	–	35 ¹⁾	–
	600 V 60 Hz		kA	–	–	–	–

- Notes**
- 1) Switching capacity of NA switches with NZM...1-...(C)NA: 480 Y/277 V
 - 2) For rated operational current AC-3 with NZM4: 400 V: max. 650 kW; 690 V: max. 600 kW
 - 3) DC data apply only for NZM...A... with thermomagnetic release
 - 4) For switching capacity NZM2...NA: 600 V/347 V
 - 5) For thermal losses per pole the specification refers to the maximum rated operational current of the construction size
 - 6) Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker
 - 7) For higher switching capacity please inquire

NZM...1, NZM...2, NZM...3, NZM...4

Max. rated uninterrupted current 300 A				Max. rated uninterrupted current 630 A			Max. rated uninterrupted current 1600 A	
NZMB2	NZMC2	NZMN2	NZMH2	NZMC3	NZMN3	NZMH3	NZMN4	NZMH4
63	121	187	330	121	187	330	105	275
53	76	105	330	76	105	330	105	187
53	63	74	286	63	74	286	74	187
–	24	53	105	24	53	143	53	143
–	9	40	40	14	40	74	40	105
30	55	85	150	55	85	150	50	125
25	36	50	150	36	50	150	50	85
25	30	35	130	30	35	130	35	85 ⁷⁾
–	12	25	50	12	25	65	25	65
–	8	20	20	8	20	35	20	50
–	–	30	60	–	30	70	–	–
–	–	30	60	–	30	70	–	–
30	55	85	150	55	85	150	37	63
25	36	50	150	36	50	150	37	43
18.5	22.5	35	130	22.5	35	130	26	43
–	6	25	37.5	9	13	33	19	49
–	4	5	5	4	5	9	15	37
355	355	355	355	NZMC3...500: 630	NZMH3-...250, 400: 400	NZMH3-...250, 400: 400	NZMN4-...630...1250: 2 x 630	NZMN4-...1600: 2 x 800
–	–	1.9	1.9	3.3	3.3	3.3	19.2	19.2
–	–	1.9	1.9	3.3	3.3	3.3	19.2	19.2
A	A	A	A	A	A	A	B	B
300	300	300	300	500	630	630	1600	1600
250	250	250	250	500	630	630	1600	1600
300	300	300	300	450	450	450	1600 ²⁾	1600 ²⁾
250	250	250	250	450	450	450	1600 ²⁾	1600 ²⁾
–	–	250	250	–	500	500	–	–
–	–	250	250	–	500	500	–	–
–	–	250	250	–	500	500	–	–
–	–	250	250	–	500	500	–	–
20000	20000	20000	20000	15000	15000	15000	10000	10000
7500	7500	10000	10000	5000	5000	5000	3000	3000
–	7500	7500	7500	3000	3000	3000	2000	2000
–	–	6500	6500	2000	2000	2000	2000	2000
–	5000	5000	5000	2000	2000	2000	1000	1000
–	–	7500	7500	–	5000	5000	–	–
–	–	7500	7500	–	5000	5000	–	–
–	–	3000	3000	–	2000	2000	–	–
–	–	3000	3000	–	2000	2000	–	–
120	120	120	120	60	60	60	60	60
19	19	19	19	31	31	31	97	97
< 10	< 10	< 10	< 10	< 10	< 10	< 10	< 25 ≤ 415 V; < 35 > 415 V	< 25 ≤ 415 V; < 35 > 415 V
35	–	85	150	–	85	150	85	125
25	–	35	100	–	42	100	42	85
18 ⁴⁾	–	25 ⁴⁾	50 ⁴⁾	–	35	50	35	50

1.8

Circuit-breakers, switch-disconnectors

Circuit-breakers, switch-disconnectors for 1000 V AC/DC


1

NZMH...S1, N...-4...S1-DC

Circuit-breakers for 7000 V AC

			NZMH2...S1 max. 300 A	NZMH3...S1 max. 630 A	NZMH4...S1 max. 1600 A
Rated operating voltage	U_e	V AC	1000	1000	1000
Rated uninterrupted current	I_b	A	300/50 °C	630/50 °C	1600/50 °C
Rated operational current					
AC-1			300	630	1600
Rated short-circuit making capacity					
1000 V 50/60 Hz	I_{cm}	kA	17	17	40
Rated short-circuit breaking capacity I_{cm}					
I_{cs} according to IEC/EN 60947	I_{cu}	kA	10	15	20
Operating sequence O-t-CO					
I_{cs} according to IEC/EN 60947	I_{cs}	kA	3	10	15
Operating sequence O-t-CO-t-CO					
Utility category			A	A	A/B
Maximum operating frequency		Ops/h	120	60	60
Durability					
Mechanical (of which max. 50% trip by shunt/undervoltage release)		Operations	20000	15000	10000
Electrical, AC-1 1000 V		Operations	3000	1000	500
Rated insulation voltage	U_i	V AC	1000	1000	1000
For use in IT electrical power networks			–	–	–
			N2-4...S1-DC max. 200 A	N3-4...S1-DC max. 500 A	N4-4...S1-DC max. 1400 A
Rated operating voltage	U_e	V DC	1000	1000	1000
Rated uninterrupted current with terminal jumpers	I_b	A	200/65 °C	500/65 °C	1400/65 °C
Rated operational current	I_e		200 (DC 22-B)	500 (DC 22-B)	1400 (DC 21-B)
Rated short-time withstand current $t = 0.1$ s	I_{cw}	kA	3	6	25
Rated conditional short-circuit current	I_q	kA	15	15	–
With back-up fuse		A9R	200	500	–
Maximum operating frequency		Ops/h	120	60	60
Durability					
Mechanical (of which max. 50% trip by shunt/undervoltage release)		Operations	20000	15000	10000
Electrical, 1000 V DC		Operations	2500 (DC 22-B)	1000 (DC 22-B)	500 (DC 21-B)
Rated insulation voltage	U_i	V DC	1250	1250	1250
For use in IT electrical power networks		V DC	1000	1000	1000

Notes NZM...S1 and N...S1—DC can not be combined with withdrawable units and/or connection on rear.
Can not be combined with early-make auxiliary contacts NZM—~.XHIV or boxterminal NZM2-4-XKC at $U_i > 1000$ V DC
Terminal type N...S1-DC:
for 2 pole switches series connection of two poles each is required. See jumper kit NZM...-4-XKV2P



PN..., N...

1

			PN1/N1 max. 160 A	PN2/N2 max. 250 A	PN3/N3 max. 630 A	N4 max. 1600 A
Switch-disconnectors						
Rated impulse withstand voltage U _{imp}						
Main contacts	V		6000	8000	8000	8000
Auxiliary contacts	V		6000	6000	6000	6000
Rated operating voltage AC (40-60 Hz)	U _e	V AC	690	690	690	690
Max. rated uninterrupted current						
IEC/EN 60947-3	I _u	A	160	250	630	1600
Overvoltage category/degree of pollution			III/3	III/3	III/3	III/3
Rated insulation voltage	U _i	V AC	690	690	1000	1000
For use in IT electrical power networks		V	690	690	690	525
Switching capacity						
Rated short-circuit making capacity	I _{cm}	kA	2.8	5.5	25	53
Rated short-time withstand current						
t=0.3 s	I _{cw}	kA	2	3.5 ¹⁾	12	25
t=1s	I _{cw}	kA	2	3.5 ¹⁾	12	25
Rated conditional short-circuit current I _q						
With back-upfuse	A gG/gL		PN1(N1)-63...125: 125 PN1(N1)-160: 160	PN2(N2)-160...250: 250	PN3(N3)-400...630: 630	N4-630...1600: 2 x 800
400/415 V	kA		100	100	100	100
690 V	kA		80	80	80	80
With downstream fuse	A gG/gL		PN1(N1)-63...125: 125 PN1(N1)-160: 160	PN2(N2)-160...250: 250	PN3(N3)-400...630: 630	N4-630...1600: 2 x 800
400/415 V	kA		100	100	100	100
690 V	kA		10	80	80	80
Rated making and breaking capacity						
Rated operational current						
AC-22/23A						
415 V	I _e	A	160	250	630	1600
690 V	I _e	A	160	250	630	1600
Lifespan, mechanical	Operations		20000	20000	15000	10000
Maximum operating frequency	Ops/h		120	120	60	60
Lifespan, electrical according to IEC/EN 60947-4-1 Annex B						
AC-1						
400/415 V	Operations		10000	10000 ³⁾	5000	3000
690 V	Operations		7500	7500 ³⁾	3000	2000
AC-3						
400/415 V	Operations		7500	7500 ³⁾	3000	2000
690 V	Operations		5000	5000 ³⁾	2000	1000
Heat dissipation per pole at I _z	W		12.7	16	40	97

Notes

- 1) The rated short-time withstand current for PN2/N2 in conjunction with residual-current release NZM2-4-XFL..
I_{cw}=1.5 kA
- 2) For thermal losses per pole the specification refers to the maximum rated operational current of the construction size.
- 3) For the electrical life at AC-3 for PN2/N2 the following applies: 690 V: max. 160 kW
- 4) For 4 pole switch-disconnectors the following applies: 400/415 V 7500 switching operations; 690 V 5000 switching operations
- 5) For 4 pole switch-disconnectors the following applies: 400/415 V 6000 switching operations; 690 V 4000 switching operations

1.8

Circuit-breakers, switch-disconnectors

Molded Case Switch

1

NS...-...NA

				NS1-...-NA max. 125A	NS2-...-NA max. 250A	NS3-...-NA max. 600A	NS4-...-NA max. 1200A
Molded Case Switch							
Rated peak withstand current		U_{imp}					
Main contacts			V	6000	8000	8000	8000
Auxiliary contacts			V	6000	6000	6000	6000
Rated operating voltage		U_b	VAC	690	690	690	690
Max. rated uninterrupted current							
IEC/EN 60947-2 Annex L		I_n	A	125	250	600	1200
UL489/CSA 22.2 No. 5.1			A	125	250	600	1200
Overvoltage category/pollution degree				III/3	III/3	III/3	III/3
Rated insulation voltage		U_{imp}	V	690	1000	1000	1000
Switching capacity according to UL 489, CSA 22.2 No. 5.1							
			KA	85	150	150	85
		240 V 60 Hz					
		480 V 60 Hz	KA	35	100	100	65
		600 V 60 Hz	KA	–	50	50	42
Switching capacity divergent from products for North America.							
Rated short-circuit making capacity			KA	187	330	330	187
		240 V 50/60 Hz					
		400/415 V 50/60 Hz	I_{cm}	KA 105	330	330	154
		440 V 50/60 Hz	I_{cm}	KA 74	286	286	143
		525 V 50/60 Hz	I_{cm}	KA 53	105	143	84
		690 V 50/60 Hz	I_{cm}	KA 17	53	74	74
Rated short-circuit breaking capacity			KA	85	150	150	85
		240 V 50/60 Hz	I_{cu}				
$I_{cc}=I_{uc}$		IEC/EN 60947	KA	50	150	150	70
		400/415 V 50/60 Hz	I_{cu}				
To IEC/EN 60947-2 Annex L		test cycle	KA	35	130	130	65
		440 V 50/60 Hz	I_{cu}				
		525 V 50/60 Hz	I_{cu}	KA 20	50	85	40
		690 V 50/60 Hz	I_{cu}	KA 10	20	35	35
		400/415 V 50/60 Hz	I_{cs}	KA 85	150	150	43
		240 V 50/60 Hz	I_{cs}	KA 50	150	150	35
		440 V 50/60 Hz	I_{cs}	KA 35	130	130	33
		525 V 50/60 Hz	I_{cs}	KA 10	37.5	33	20
		690 V 50/60 Hz	I_{cs}	KA 7.5	5	9	18
Lifespan, mechanical (of which max. 50% trip by shunt/undervoltage release)			Operations	20000	20000	15000	10000
Maximum operating frequency			ops./h	120	120	60	60
Lifespan, electrical		AC-1	Operations	10000	10000	5000	3000
		400/415 V 50/60					
		690 V 50/60 Hz	Operations	7500	7500	3000	2000
		400/415 V 50/60	Operations	7500	6500	2000	2000
		690 V 50/60 Hz	Operations	5000	5000	2000	1000
Heat dissipation per pole at I_b ¹⁾			w	8.7	19	40	97
Total downtime on short-circuit			ms	< 10	< 10	< 10	<25 ≤ 415V <35 > 415V

Notes

1) Figures apply to the maximum rated operational current of the construction size

NZM1, NZM2, NZM3...-NA

Circuit-breaker		Volts AC 60Hz	Threshold current			Intermediate current			High interrupting capacity		
Part no.	60Hz amps (A)		rms sym (kA)	Maximum Peak (kA)	I ² dt (kA ² s)	rms sym (kA)	Maximum Peak (kA)	I ² dt (kA ² s)	rms sym (kA)	Maximum Peak (kA)	I ² dt (kA ² s)
NZM B1	125 A	240	8.125	7.4	0.18	22	13.53	0.33	35	16.78	0.35
A.../AF...NA		480	8.125	9.22	0.38	18	15.16	0.67	25	26.55	0.78
NZM N1-	125 A	240	8.125	7.4	0.18	50	18.53	0.38	85	19.16	0.36
A.../AF...NA		480	8.125	9.22	0.38	22	18.55	0.97	35	20.58	1.02
NZMB2-	250 A	240	16.25	13.00	0.4	22	14.5	0.6	35	15.5	0.4
A.../AF...NA		480	15	14	0.6	22	13.5	0.45	25	16.5	0.6
		600	10	12	0.5	14	14.5	0.75	18	15.5	0.75
NZMN2-	250 A	240	16.25	13	0.4	50	17	0.45	85	19.5	0.45
A.../AF...NA		480	16.25	13.5	0.6	22	14.5	0.6	35	20	0.65
		600	15	14.5	0.7	22	16.5	0.8	25	17	0.75
NZMN2-	250 A	240	16.25	12	0.45	50	18	0.4	85	19.5	0.4
VE(F)-NA		480	16.25	14.5	0.5	22	18	0.65	35	20	0.6
		600	15	14.5	0.6	22	17	0.75	25	18	0.65
NZMH2-	125 A	240	8.125	9	0.3	100	19	0.35	200	21.5	0.35
A.../AF...NA		480	8.125	9	0.35	55	23	0.7	150	29	0.85
		600	8.125	10	0.4	42	22.5	0.7	55	26	0.8
NZMH2-	250 A	240	16.25	13	0.4	100	20.5	0.4	150	20	0.4
A.../AF...NA		480	16.25	13.5	0.5	65	24	0.9	100	27	0.8
		600	16.25	13	0.6	30	20	0.7	50	25	0.9
NZMH2-	250 A	240	16.25	11.5	0.4	100	18.5	0.3	150	21	0.4
VE.../VEF...NA		480	16.25	14.5	0.5	65	24	0.6	100	27	0.7
		600	16.25	14.5	0.5	30	20	0.6	50	25	0.8
NZMN3-	250 A	39	24.5	1	-	-	-	85	33.5	1.1	240
VE...NA		25	27	1.8	-	-	-	42	35	1.8	480
		20	25	1.8	-	-	-	35	34	2.6	600
NZMH3-	600 A	240	39	45	4.5	100	35	2	150	40	2.5
VE...NA		480	39	35	2.5	65	39	3	100	47	3
		600	30	31	2.4	42	37	3	50	42	2.8

Part no.	Weight kg	Part no.	Weight kg
Circuit-breakers		Switch-disconnectors	
NZM...1-...	1.046	PN1-..., N1-...	0.926
NZM...1-4...	1.325	PN1-4-..., N1-4-...	1.325
NZM...2-...	2.345	PN2-..., N2-...	2.15
NZM...2-4...	3.5	PN2-4-..., N2-4-...	2.65
NZM...3-...	6.34	PN3-..., N3-...	5.7
NZM...3-4...	8.4	PN3-4-..., N3-4...	7.1
NZM...4-...	21	N4-...	17
NZM...4-4...	27	N4-4-	22
Plug-in adapter elements			
+NZM2-XSV	4.7		
+NZM2-4-XSV	5.9		
Withdrawable units			
+NZM3-XAV	21		
+NZM3-4-XAV	27		
+NZM4-XAV	52		
+NZM4-4-XAV	65		

1.8 Circuit-breakers, switch-disconnectors

Temperature dependency, derating

1 NZM...A(F), NZM...M(S)

Device part no	Release type	Response time of the overload release at temperatures deviating from the reference temperatures						
		Temperature compensation coefficient						
		20 °C	30 °C	40 °C	50 °C	60 °C	65 °C	70 °C
Thermomagnetic release (TM)								
System protection		System protection (reference temperature 40 °C)						
NZM...1(-4)-A(F)15...80(-NA)	TM	1.14	1.07	1	0.93	0.86	0.83	0.79
NZM...1(-4)-A(F)90...125(-NA)	TM	1.14	1.07	1	0.93	0.86	0.83	0.79
NZM...1(-4)-A160	TM	1.08	1.04	1	0.96	0.92	0.90	0.88
NZM...1-A20...125-SVE	TM with SVE	1.14	1.07	1	0.93	0.86	0.83	0.79
NZM...2(-4)-A(F)15...200(-NA)	TM	1.04	1.02	1	0.98	0.96	0.95	0.94
NZM...2(-4)-A(F)250(-NA)	TM	1.04	1.02	1	0.98	0.96	0.95	0.94
NZM...2(-4)-A20...200-SVE	TM with SVE	1.04	1.02	1	0.98	0.96	0.95	0.94
NZM...2(-4)-A250-SVE	TM with SVE	1.04	1.02	1	0.98	0.96	0.95	0.94
NZM...3(-4)A-250...500	TM	1.12	1.06	1	0.94	0.88	0.85	0.82
NZM...3(-4)A-250...500	TM with XAV	1.06	1	0.94	0.88	0.82	0.79	0.76
Short-circuit/motor protection		Motor protection (reference temperature 20 °C)						
NZM...1-M(S)40...80(-CNA)	TM	1	0.98	0.95	0.93	0.90	0.89	0.88
NZM...1-M(S)100(-CNA)	TM	1	0.98	0.95	0.93	0.90	0.89	0.88
NZM...1-M(S)40...100-SVE	TM with SVE	1	0.98	0.95	0.93	0.90	0.89	0.88
NZM...2-M(S)20...200(-CNA)	TM	1	0.98	0.96	0.94	0.92	0.91	0.90
NZM...2-M(S)20...200-SVE	TM with SVE	1	0.98	0.96	0.94	0.92	0.91	0.90
NZM...3-S250...500	TM with/without XAV	1	1	1	1	1	1	1

Notes

If temperatures deviate from the reference temperature, a slight change of the overload protection properties occurs. To determine the response time from the tripping characteristics, the temperature compensation coefficients listed in the table must be considered.

Example:
 An NZM1-A100 is calibrated for a reference temperature of 40 °C.
 What happens when it is operated at an ambient temperature of 60 °C?
 At 60 °C, the temperature compensation coefficient of 0.86 results in a reduced operating current of $I_n=100$
 $A \times 0.86 = 86 A$. In other words at an ambient temperature of 60 °C the NZM1-A100 trips as if it were set to 86 A.

Device part no	Release type	Response time of the overload release at temperatures deviating from the reference temperatures						
		Temperature compensation coefficient						
		20 °C	30 °C	40 °C	50 °C	60 °C	65 °C	70 °C
Thermomagnetic release (TM)								
System protection		System protection (reference temperature 40 °C)						
NZM...1(-4)-A(F)15...80(-NA)	TM	1	1	1	1	1	1	1
NZM...1(-4)-A(F)90...125(-NA)	TM	1	1	1	1	0.86	0.83	0.8
NZM...1(-4)-A160	TM	1	1	1	0.95	0.9	0.85	0.8
NZM...1-A20...125-SVE	TM with SVE	1	1	1	1	1	1	1
NZM...2(-4)-A(F)15...200(-NA)	TM	1	0.92	0.87	0.81	–	–	–
NZM...2(-4)-A(F)250(-NA)	TM	1	1	1	1	1	1	1
NZM...2(-4)-A20...200-SVE	TM with SVE	1	1	1	1	0.9	0.85	0.8
NZM...2(-4)-A250-SVE	TM with SVE	1	1	1	1	1	1	1
NZM...3(-4)A-250...500	TM	1	0.97	0.92	0.87	0.81	–	–
NZM...3(-4)A-250...500	TM with XAV	1	1	1	0.94	0.88	0.85	0.82
Short-circuit/motor protection		Motor protection (reference temperature 20 °C)						
NZM...1-M(S)40...80(-CNA)	TM	1	1	1	1	1	1	1
NZM...1-M(S)100(-CNA)	TM	1	1	1	1	1	1	1
NZM...1-M(S)40...100-SVE	TM with SVE	1	1	1	1	0.86	0.83	0.8
NZM...2-M(S)20...200(-CNA)	TM	1	0.92	0.87	0.81	–	–	–
NZM...2-M(S)20...200-SVE	TM with SVE	1	1	1	1	1	1	1
NZM...3-S250...500	TM with/without XAV	1	1	1	1	1	1	1
NZM...3-S250...500	TM with/without XAV	1	1	1	0.94	0.88	0.85	0.82
NZM...3-S250...500	TM	1	1	1	0.94	0.88	0.85	0.82
NZM...3-S250...400	TM with/without XAV	1	1	1	1	1	1	1
		1	1	1	1	1	0.97	0.94

Notes

In determining the maximum permissible current loads at different ambient temperatures, the derating coefficients listed in the table must be considered.

Example:
 An NZM2-A250 should be operated at an ambient air temperature of 65 °C.
 How high is the permissible rated operational current I_n ?
 At 65 °C the derating coefficient is 0.85, i.e. $I_n=250 \times 0.85=212.5 A$.
 At an ambient temperature of 65 °C the NZM2-A250 can therefore be operated at up to $I_n=212.5 A$.

NZM1, NZM2, NZM3, NZM4

1

Device part no	Release type	Reduction of the rated operational current (derating) under particular ambient conditions (according to IEC 947)						
		berating coefficient						
		20 °C	30 °C	40 °C	50 °C	60 °C	65 °C	70 °C
Electronic release (E)								
System protection								
NZM...31-41-AEIF1250...500(-NA)	E	1	1	1	1	1	1	1
NZM...31-41-AEIF1550...630(-NA)	E	1	1	1	1	0.9	0.85	0.8
NZM...31-41-AE250...400+XAV	E with XAV	1	1	1	1	1	1	1
NZM...31-41-AE630+XAV	E with XAV	0.96	0.92	0.87	0.83	0.78	0.75	0.73
NZM...41-41-AEIF1600...1250(-NA)	E	1	1	1	1	1	1	1
NZM...41-41-AE1600	E	1	1	1	1	0.87	0.85	0.82
NZM...41-41-AE630...1250+XAV	E with XAV	1	1	1	1	1	1	1
NZM...41-41-AE1600+XAV	E with XAV	1	0.98	0.93	0.89	0.85	0.83	0.8
Selectivity and generator protection								
NZM...21-41-VEIF1100...175(-NA) (-S1)	E	1	1	1	1	1	1	1
NZM...21-41-VEIF1200...250(-NA) (-S1)	E	1	1	1	1	0.9	0.85	0.8
NZM...21-41-VE100...160+XSV	E with XAVE	1	1	1	1	1	1	1
NZM...21-41-VE250+XSV	E with XAV	1	1	1	0.94	0.88	0.84	0.81
NZM...31-41-VEIF1250...500(-NA)	E	1	1	1	1	1	1	1
NZM...31-41-VEIF1550...630(-NA)	E	1	1	1	1	0.9	0.85	0.8
NZM...31-41-VE250...400+XAV	E with XAV	1	1	1	1	1	1	1
NZM...31-41-VE630+XAV	E with XAV	0.96	0.92	0.87	0.83	0.78	0.75	0.73
NZM...41-41-VEIF1600...1250(-NA) (-S1)	E	1	1	1	1	1	1	1
NZM...41-41-VE1600 (-S1)	E	1	1	1	1	0.87	0.85	0.82
NZM...41-41-VE630...1250+XAV	E with XAV	1	1	1	1	1	1	1
NZM...41-41-VE1600+XAV	E with XAV	1	0.98	0.93	0.89	0.85	0.83	0.8
Motor protection								
NZM...2-ME(SE)90...140(-CNA)	E	1	1	1	1	1	1	1
NZM...2-ME(SE)220(-CNA)	E	1	1	1	1	0.9	0.85	0.8
NZM...2-ME90...140+XSV	E with XAV	1	1	1	1	1	1	1
NZM...2-ME220+XSV	E with XAV	1	1	1	0.94	0.88	0.84	0.81
NZM...3-ME(SE)220...350(-CNA) (-S1)	E	1	1	1	1	1	1	1
NZM...3-ME(SE)450(-CNA) (-S1)	E	1	1	1	1	1	1	1
NZM...3-M E220...350+XAV	E with XAV	1	1	1	1	1	1	1
NZM...3-ME450+XAV	E with XAV	0.96	0.92	0.87	0.83	0.78	0.75	0.73
NZM...4-ME550...875 (-S1)	E	1	1	1	1	1	1	1
NZM...4-ME1400 (-S1)	E	1	1	1	1	1	1	1
NZM...4-M E550...875+XAV	E with XAV	1	1	1	1	1	1	1
NZM...4-ME1400+XAV	E with XAV	1	0.98	0.93	0.89	0.85	0.83	0.8
Switch-disconnectors/Molded Case Switch								
N (-4)-63, PN1(-4)-63, NS1-63-NA		1	1	1	1	1	1	1
N 1(-4)-100...125, PN1(-4)-100...125, NS1-100...125-NA		1	1	1	1	0.86	0.83	0.8
N (-4)-160, PN1(-4)-160		1	1	1	0.95	0.9	0.85	0.8
N2(-4)-160...200, PN2(-4)-160...200, NS2-160...200-NA		1	1	1	1	1	1	1
N21(-4)-250, PN2(-4)-200, NS2-250-NA		1	1	1	1	0.9	0.85	0.8
N2(-4)-160...200+XSV		1	1	1	1	1	1	1
N2(-4)-250, NS2-250-NA		1	0.97	0.92	0.87	0.81	1	1
N3(-4)-400, PN3(-4)-400, NS3-400-NA		1	1	1	1	1	1	1
N3(-4)-630, PN3(-4)-630, NS3-600-NA		1	1	1	0.94	0.89	0.86	0.84
N3(-4)-400+XAV		1	1	1	1	1	1	1
N3(-4)-630+XAV		0.96	0.92	0.87	0.83	0.78	0.75	0.73
N4(-4)-630...1250, NS4-800...1200-NA		1	1	1	1	1	1	1
N4(-4)-1600		1	1	1	1	0.87	0.85	0.82
N4(-4)-630...1250+XAV		1	1	1	1	1	1	1
N4(-4)-1600+XAV		1	0.98	0.93	0.89	0.85	0.83	0.8
Multi-function component adapters								
NZM...3-630...+NZM3-XAD630	with XAD	1	0.96	0.92	0.88	0.84	0.82	0.8

Notes

In determining the maximum permissible current loads at different ambient temperatures, the derating coefficients listed in the table must be considered.

Example:

An NZM2-A250 should be operated at an ambient air temperature of 65 °C.

How high is the permissible rated operational current I_b ?

At 65 °C the derating coefficient is 0.85, this means $I_b = 250 \times 0.85 = 212.5$ A.

The NZM2-A250 may be operated at an ambient temperature of 65 °C with a maximum $I_b = 212.5$ A.

1.8 Circuit-breakers, switch-disconnectors

Active power loss

1

NZM1, NZM2, NZM3, NZM4

NZM up to 500 A with thermomagnetic release(3 and 4 pole)

Fixed mounted												
NZM1-												
A...(-NA)												
Ln[A]	P	B	P	B	P	B	P	B	P	B	P	B
	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]
1.2	-	-	-	-	-	-	1.8	413000	-	-	-	-
1.6	-	-	-	-	-	-	-	-	-	-	-	-
2	-	-	-	-	-	-	0.8	66000	-	-	-	-
2.4	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	-	-	-	-	1.8	66000	-	-	-	-
5	-	-	-	-	-	-	0.7	9180	-	-	-	-
8	-	-	-	-	-	-	1.8	9180	-	-	-	-
12	-	-	-	-	-	-	0.7	1670	-	-	-	-
15	-	-	-	-	5.5	8180	-	-	-	-	-	-
18	-	-	-	-	-	-	1.6	1670	-	-	-	-
20	9.8	8180	-	-	9.8	8180	-	-	-	-	-	-
25	8.8	4680	-	-	8.8	4680	-	-	-	-	-	-
26	-	-	-	-	-	-	2.0	1050	-	-	-	-
30	-	-	-	-	8.2	3030	-	-	-	-	-	-
32	9.3	3030	-	-	-	-	-	-	-	-	-	-
33	-	-	-	-	-	-	3.4	1050	-	-	-	-
35	-	-	-	-	8.2	2220	-	-	-	-	-	-
40	10.7	2220	13.5	2810	10.7	2220	2.7	562	-	-	-	-
45	-	-	-	-	10.7	1760	-	-	-	-	-	-
50	13.2	1760	14.1	1880	13.2	1760	4.2	562	-	-	-	-
60	-	-	-	-	12.9	1190	-	-	-	-	-	-
63	14.2	1190	14.9	1250	-	-	6.7	562	6.7	562	6	380
70	-	-	-	-	12.5	850	-	-	-	-	-	-
80	16.3	850	20.8	1085	16.3	850	10.8	562	-	-	-	-
90	-	-	-	-	17.7	730	-	-	-	-	-	-
100	21.9	730	23.9	795	21.9	730	16.9	562	16.9	562	11.4	380
110	-	-	-	-	20.7	570	-	-	-	-	-	-
125	26.7	570	-	-	26.7	570	-	-	26.3	562	17.8	380
150	-	-	-	-	-	-	-	-	-	-	-	-
160	36.1	470	-	-	-	-	-	-	-	-	29.2	380
175	-	-	-	-	-	-	-	-	-	-	-	-
200	-	-	-	-	-	-	-	-	-	-	-	-
225	-	-	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-	-	-
400	-	-	-	-	-	-	-	-	-	-	-	-
500	-	-	-	-	-	-	-	-	-	-	-	-

NZM2/3/4 with electronic release			N2/3/4, PN2/3				Additional plug-in units		
Fixed mounted			Fixed mounted		N2-4-... S1-DC		NZM1-...		
NZM2-...			N2-...		IN+L1+L2+L31		Ln[A]	P	B
Ln[A]	P	B	P	B	P	B	125	14	300
	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]		[W]	[μohms]
200	-	-	-	-	44	275			
250	52	275	48	256	-	-			
NZM3-...			NZM3-...		NZM3-...		Ln[A]	P	B
Ln[A]	P	B	P	B	P	B	250	19	100
	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]		[W]	[μohms]
450	-	-	-	-	122	150			
630	119	100	107	90	-	-			
NZM4-...			NZM4-...		NZM4-...		Ln[A]	P	B
Ln[A]	P	B	P	B	P	B	630	83	70
	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]		[W]	[μohms]
1250	-	-	-	-	231	37			
1400	-	-	-	-	290	37			
1400	52	275	284	37	-	-	1600	77	10

NZM1, NZM2, NZM3, NZM4

Fixed mountec

NZM2-

A...(-NA)

P	B	P	B	P	B	P	B	P	B	P	B	P	B
[W]	[μohms]	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]	[W]	[μohms]
–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	5.8	750000	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	7.8	450000	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	0.3	4600	–	–	–	–	–	–
–	–	–	–	–	–	0.9	4600	–	–	–	–	–	–
–	–	–	–	–	–	0.5	1200	–	–	–	–	–	–
–	–	–	–	2.9	4250	–	–	–	–	–	–	–	–
–	–	–	–	–	–	1.2	1200	–	–	–	–	–	–
5.1	4250	5.1	4250	5.1	4250	–	–	–	–	–	–	–	–
8	4250	8	4250	5.9	3140	–	–	–	–	–	–	–	–
–	–	–	–	–	–	1.6	780	–	–	–	–	–	–
–	–	–	–	8.5	3140	–	–	–	–	–	–	–	–
9.6	3140	9.6	3140	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	2.5	780	–	–	–	–	–	–
–	–	–	–	10.3	2800	–	–	–	–	–	–	–	–
13.4	2800	13.4	2800	13.4	2800	1.5	317	–	–	–	–	–	–
–	–	–	–	13.8	2270	–	–	–	–	–	–	–	–
17	2270	17	2270	17	2270	2.4	317	–	–	–	–	–	–
–	–	–	–	18.4	1700	–	–	–	–	–	–	–	–
20.2	1700	20.2	1700	–	–	3.8	317	–	–	–	–	–	–
–	–	–	–	15.7	1070	–	–	–	–	–	–	–	–
20.5	1070	20.5	1070	20.5	1070	6.1	317	–	–	–	–	–	–
–	–	–	–	20.8	855	–	–	–	–	–	–	–	–
25.7	855	25.7	855	25.7	855	9.5	317	–	–	–	–	–	–
–	–	–	–	21.4	589	–	–	–	–	–	–	–	–
27.6	589	27.6	589	27.6	589	14.9	317	–	–	–	–	–	–
–	–	–	–	33.6	500	–	–	–	–	–	–	–	–
38.4	500	38.4	500	–	–	24.3	317	24.3	317	19.7	256	–	–
–	–	–	–	36.8	400	–	–	–	–	–	–	–	–
48	400	48	400	48	400	38	317	38	317	30.7	256	–	–
–	–	–	–	47.1	310	–	–	–	–	–	–	–	–
58.1	310	–	–	58.1	310	59.4	317	59.4	317	48	256	68	364
83.7	310	–	–	83.7	310	85.6	317	–	–	–	–	79	256
–	–	–	–	–	–	–	–	–	–	–	–	72	151
–	–	–	–	–	–	–	–	–	–	–	–	93	124

Notes: The values stated in the table apply for 3 and 4 pole fixed mounted devices with an equal load distribution. On 4 pole devices the current in the neutral conductor is equal to zero. The total resistive load is the measured value for a 3 pole or a 4 pole switch (independent of I) and the type of release.

The total resistive load for a switch or withdrawable plug results from the resistive value for fixed mounting + resistive value for plug-in or withdrawable. The heat dissipation can be calculated with the formula: $P=3 \times R \times I^2$

1.8 Circuit-breakers, switch-disconnectors

Terminal capacities

1 NZM..., PN..., NS..., N...

				NZM1, PN1, N1 NS1 160A	I _n ¹⁾ A	NZM2, PN2, N2 NS2 300 A	I _n ¹⁾ A	NZM3, PN3, N3, NS3 630 A	I _n ¹⁾ A	
Terminal capacities										
Standard equipment				Boxterminal	–	Screwterminal	–	Screwterminal	–	
Accessories				Screwterminals			Boxterminal	Boxterminal		
				Tunnel terminals			Tunnel terminals			
				Rearterminal bolts			Rearterminal bolts			
Copper conductors and cables										
Box terminal	Solid		mm ²	1 x (10-16) ,2x(6-16)	160	1 x (10-16) ,2x(4-16)	300	2x16	500	
	Stranded		mm ²	1 x (25-70) ³⁾ ,2x(6-25)		1 x (25-185) ³⁾ ,2x(25-70)		1 x (35-240) ,2x(25-120)		
Tunnel terminal	Solid		mm ²	1x16	160	1x16	300	–	–	
	Stranded	1-hole	mm ²	1 x (25-95)		1 x (25-185)		1 x (25-185) ²⁾	350	
		Double-hole	mm ²	–	–	–	–	1 x (50-240)	630	
		4-hole	mm ²	–	–	–	–	2 x (50-240)	2x185	
Screwterminals and connection on rear										
Directly on switch	Solid		mm ²	1 x (10-16) ,2x(6-16)	160	1 x (10-16) ,2x(4-16)	300	1 x16,2x16	630 ,2x185	
	Stranded		mm ²	1 x (25-70) ³⁾ ,2x25		1 x (25-185) ,2x(25-70)		1 x (25-240) ,2x (25-240)		
Module plate	1-hole	min.	mm ²	–	–	–	–	–	–	
		max	mm ²	–	–	–	–	–	–	
Module plate	2-hole	min.	mm ²	–	–	–	–	–	–	
		max	mm ²	–	–	–	–	–	–	
Connection width extension				mm ²				2x300	630 ,2x185	
Aluminium conductors and cables										
Tunnel terminal	Solid		mm ²	1 x 16	160	1 x 16	250	1 x 16	350	
	Stranded	1-hole	mm ²	1 x (25-95)		1 x (25-185)		1 x (25-185) ³⁾		
		Double-hole	mm ²	–	–	–	–	1 x (50-240) ,2x (50-240)	630	
	4-hole	mm ²	–	–	–	–	–	–		
Screwterminals and connection on rear										
Directly on switch	Solid		mm ²	1 x (10-16) ,2x(10-16)	160	1 x (10-16) ,2x(10-16)	250	1 x16 ,2x(10-16)	400	
	Stranded		mm ²	1 x (25-35) ,2x(25-35)		1 x (25-50) ,2x(25-50)		1 x (25-120) ,2x(25-120)		
Module plate	1-hole	min.	mm ²	–	–	–	–	–	–	
		max.	mm ²	–	–	–	–	–	–	
Module plate	2-hole		mm ²	–	–	–	–	–	–	
			mm ²	–	–	–	–	–	–	
Connection width extension				mm ²						
Copper strip (number of segments x width x segment thickness)										
Box terminal		min.	mm	2x9x0.8	160	2x9x0.8	300	6x16x0.8	630	
		max.	mm	9x9x0.8		10x16x0.8		10x24x1.0		
							2x8x15.5x0.8		+5x24x1.0	
							(2x)8x24x1.0	–		
Singleflat cableterminal		min.	mm	–	–	–	–	–	–	
		max.	mm	–	–	–	–	–	–	
Module plate	1-hole		mm	–	–	–	–	–	–	
Screwterminals and connection on rear										
Copper strip, perforated		min.	mm	–	–	2x16x0.8	300	6x16x0.8	630	
		max.	mm	–	–	10x24x0.8		10x32x1.0		
								+5x32x1.0		
Connection width extension				mm ²	–	–	–	(2x)10x50x1.0		
Copper bar(width x thickness)										
Screwterminals and connection on rear										
Screw terminals										
Directly on switch		min.		M6	–	M8	–	M10	–	
		max.	mm	12x5	160	16x5	300	20x5	630	
			mm	16x5		24x8		30 x 10, +30 x 5		
Module plate	1-hole	min.	mm	–	–	–	–	–	–	
		max.	mm	–	–	–	–	–	–	
Module plate	2-hole		mm	–	–	–	–	–	–	
			mm	–	–	–	–	–	–	
Connection width extension				min.	mm	–	–	–	630	
		max.	mm	–	–	–	–	2x(10x50)	10x40	

- Notes**
- 1)The rated currents I_n have been determined according to IEC/EN 60947 (switchgear standard) and generally relate to the max. defined cross-sections.They are given for general reference here. The engineering standards which apply in each case must be observed
 - 2)To 240 mm² can be connected depending on the make of cable.
 - 3)To 95 mm² can be connected depending on the make of cable.

NS..., NZM...-NA

NZM4, N4, NS4	Ln¹⁾		NZM...1...NA,	NZM...2...NA,	NZM...3...NA,	NZM...4...NA,
7 600 A	A		NS1...NA	NS2...NA	NS3...NA	NS4...NA
Screwterminal	–	–	Box terminal	Screwterminal	Screw terminal	Screw terminal
Tunnel terminals	–	–	Screwterminals	Boxterminal	Box terminal	Tunnel terminals
Rearterminal bolts	–	–	Tunnel terminals	Tunnel terminals	Tunnel terminals	Rearterminalbolts
Strip terminal	–	–	Rearterminalbolts	Rearterminal bolts	Rearterminalbolts	Strip terminal
–	–	AWG	1 x (12–6)	1 x (12–6)	–	–
–	–	AWG/kcmil	1x(4-2/0)	1x(4-350)	1 x (2–500)	–
–	–	AWG	1x6	1x6	1x6	–
–	–	AWG/kcmil	1x(4-3/0)	1x(4-350)	1x(4-350)	–
–	–	AWG/kcmil	–	–	1x(0-500) ,2x(0-500)	–
4 x (50-240)	1400	AWG/kcmil	–	–	–	4x(0-500)
–	–	AWG	1 x (12–6)	1 x (12–6)	–	–
–	–	AWG/kcmil	2x(9–6)	–	–	–
1 x (120–185)	1250	AWG/kcmil	1x(4–2/0)	1x(4–2/0)	1x(4–350)	1 x (250–350)
4x(50–185)	–	–	–	–	2x350	4x(0–350)
1 x (120–300)	1000	kcmil	–	–	–	1 x (250–600)
2 x (95–300)	–	AWG/kcmil	–	–	–	2 x (3/0–600)
2 x (95–185)	1400	AWG/kcmil	–	–	–	2 x (3/0–350)
4 x (35–185)	–	AWG/kcmil	–	–	–	4x(2–350)
4 x 300	1600	AWG/kcmil	–	–	2x 500	4 x 600
6x195–2401	4 x 240	–	–	–	–	6 x (3/0–500)
–	–	AWG	–	–	–	–
–	–	AWG/kcmil	–	–	–	–
–	–	AWG/kcmil	–	–	–	–
4 x (50-240)	1400	AWG/kcmil	–	–	–	–
–	–	AWG	–	–	–	–
–	–	AWG/kcmil	–	–	–	–
1 x (185–240)	Please inquire	kcmil	–	–	–	–
2 x (70–185)	Please inquire	AWG/kcmil	–	–	–	–
4 x 50	–	AWG	–	–	–	–
2 x 240	Please inquire	AWG/kcmil	–	–	–	–
6x170–240)	–	–	–	–	–	–
–	–	mm	2x9x0.8	2x9x0.8	6x16x0.8	–
–	–	mm	9x9x0.8	10x16x0.8	10 x 24 x 1.0	–
–	–	–	–	–	+5x24x1.0	–
–	–	–	–	–	(2x)8x24x1.0	–
6x16x0.8	1100	mm	–	–	–	6x16x0.8
(2x)10x32x1.0	–	mm	–	–	–	(2x) 10x32x 1.0
(2x)110x50x1.0	1250	mm	–	–	–	(2x)110x50x1.0
–	–	–	–	–	–	(2x)10x40x1.0
(2x)10x50x1.0	1600	mm	–	2x16x0.8	6x16x0.8	(2x)10x50x1.0
(2x)110x50x1.0	–	mm	–	10x16x0.8	10x32x1.0	(2x)10x50x1.0
–	–	mm	–	–	+5x32x1.0	–
(2x)110x80x1.0	1600	–	–	–	(2x)10x50x1.0	(2x)10x80x 1.0
–	–	–	–	–	–	–
M10	–	–	M6	M8	M10	M10
25x5	1600	mm	12x5	16x5	20 x 5	25x5
2x150x10),2 x (80x 10)	–	mm	16x5	20x5	30 x 10, +30 x 5	2 x (50 x 10)
25x5	1250	mm	–	–	–	25x5
2x150x10)	2 x (40 x 10)	mm	–	–	–	2 x (50 x 10)
2x150x10)	1600	mm	–	–	–	2 x (50 x 10)
60 x 10	1600	mm	–	–	–	60 x 10
2 x (80 x 10)	2 x (50 x 10)	mm	–	–	2x110x50)	2 x (80 x 10)

1.8 Circuit-breakers, switch-disconnectors













Temperature dependency

1 N...S1-DC

Basic devices

Jumper kits

Reduction of the rated operational current (derating) under particular ambient conditions

Basic devices	Jumper kits	Contact protection	Mounting position	Temperature compensation coefficient								
				20 °C	20 °C	20 °C	20 °C	20 °C	20 °C	20 °C	20 °C	
Switch-disconnectors												
N2-4-160-S1-DC		+NZM2-4-XKV2P	IP2X	v	1	1	1	1	1	1	1	1
				h	1	1	1	1	1	1	1	1
N2-4-200-S1-DC		+NZM2-4-XKV2P	IP2X	v	1	1	1	1	1	1	1	0.95
				h	1	1	1	1	1	1	0.95	0.92
N3-4-320(400)-S1-DC		+NZM3-4-XKV2P	IP2X	v	1	1	1	1	1	1	1	1
				h	1	1	1	1	1	1	1	1
N 3-4-500-S 1-DC		+NZM3-4-XKV2P	IP00	v	1	1	1	1	1	1	1	1
				h	1	1	1	1	1	1	1	1
N2-4-160-S1-DC		+NZM3-4-XKV2P-K	IP00	v	1	1	1	1	1	1	1	0.97
				h	1	1	1	1	1	1	0.97	0.95
		+NZM3-4-XKV2P	IP00	v	1	1	1	1	0.97	0.95	0.92	0.89
				h	1	1	1	0.97	0.95	0.92	0.89	0.87
		+NZM3-4-XKV2P-K	IP1X	v	1	1	1	1	1	0.98	0.95	0.92
				h	1	1	1	1	0.97	0.94	0.91	0.89
		+NZM3-4-XKV2P-K	IP2X	v	1	1	1	0.95	0.92	0.89	0.86	0.83
				h	1	1	0.98	0.93	0.9	0.87	0.84	0.81
N4-4-800110001-S1-DC		+NZM4-4-XKV2P	IP2X	v	1	1	1	1	1	1	1	1
				h	1	1	1	1	1	1	1	1
N 4-4-1250-S 1-DC		+NZM4-4-XKV2P	IP2X	v	1	1	1	1	1	1	1	0.97
				h	1	1	1	1	1	1	0.97	0.95
N 4-4-1400-S 1-DC		+NZM4-4-XKV2P	IP2X	v	1	1	1	0.94	0.92	0.9	–	–
				h	1	1	0.97	0.91	–	–	–	–
		+NZM3-4-XKV2P-1400	IP00	v	1	1	1	1	1 ¹⁾	1 ¹⁾	1 ¹⁾	0.97
				h	1	1	1	1	1 ¹⁾	1 ¹⁾	1 ¹⁾	0.97

Notes

Mounting position:

v=vertical, h=horizontal


Incomer and outgoing at bottom or top, freely selectable

¹⁾Incomer at from bottom only.

M22-K..., XHI(V)


		At AC=50/60 Hz		M22-K...	M22-CK...	XHIV
Auxiliary contacts						
Rated operating voltage						
AC voltage		U_b	V AC	500	230	500
DC voltage		U_a	V DC	220	220	220
Conventional thermal current		$I_{th}=I_e$	A	4	4	4
Rated operational current						
AC-15	115 V	I_e	A	4	4	4
	230 V	I_e	A	4	4	4
	400 V	I_e	A	2	–	2
	500 V	I_e	A	1	–	1
DC-13	24 V	I_e	A	3	3	3
	42 V	I_e	A	1.1	1	1.5
	60 V	I_e	A	1.2	0.8	0.8
	110 V	I_e	A	0.8	0.5	0.5
	220 V	I_e	A	0.3	0.2	0.2
Short-circuit protection						
Max.fuse		A gG/gL		10	10	10
Max. miniature circuit-breaker		A		PKZMO-10/FAZ-B6	FAZ-B6/B 1	FAZ-B6
Early make times compared to main contacts on make and break (switching times on manual operation).		ms		–	–	–
						NZM1, PN1, N(S)1: approx.20 NZM2, PN2, N(S)2: approx.20 NZM3, PN3, N(S)3: approx.20 NZM4, N(S)4: approx. 90 With NZM4/N(S)4the HIV does not feature early break.
Terminal capacities						
Solid or flexible conductor with ferrule						
		mm ²		1 x (0.75–2.5) 2 x (0.75–2.5)	1 x (0.5–1.5) 2 x (0.5–1.5)	1 x (0.75–2.5) 2 x (0.75–2.5)
		AWG		1x(18–14)	1x(20–18)	1x(18–14)
		L_e A		2x(18–14)	2x(20–18)	2x(18–14)
UL/CSA						
Rated operational current				10A...600 V AC 1A–250 V DC		2.5 A–240 V AC 1A–250 V DC
Heavy Pilot Duty				A600/P300 via 300 V AC same polarity		C300/R300

Maximum equipment and position of the built-in accessories



	③ -XHIV (2S) or-XA or-XU	② HIA	① HIN
NZM1, N(S)1	1	1	1
NZM2, N(S)2	1	1	2
NZM3, N(S)3	1	1	3
NZM4, N(S)4	1	2	3
PN1	1	–	1
PN2	1	–	2
PN3	1	–	3

Time differences ON-OFF

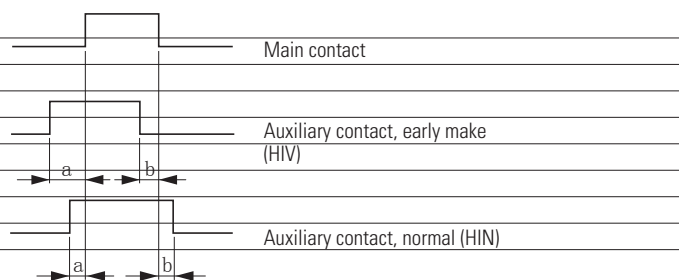

Notes

On combination with remote operator NZM-XR..., the right slot for standard auxiliary contacts HIN can be equipped only with single contacts.

	Time difference a (ms)			Motor drive HIV	HIN	K01	Time difference b (ms)			Motor drive HIV	HIN	K01
	Manual operation HIV	HIN	K01				Manual operation HIV	HIN	K01			
NZM1	20 ²⁾	0	2.5	–	–	–	20 ²⁾	0	2.5	–	–	–
NZM2	20 ²⁾	3.5	6.5	Not permissible	2.5	4.5	20 ²⁾	3	4.5	Not permissible	3	4
NZM3	20 ²⁾	4	8	Not permissible	2	NZM1	20 ²⁾	3.5	8	Not permissible	3	6.5
NZM4	90 ²⁾	7	11	Not permissible	Please inquire	Please inquire	0 ¹²⁾	12	15	Not permissible	Please inquire	Please inquire

Notes

- 1) With NZM4/N(S)4 the HIV does not feature early break.
- 2) Minimum value, as it is dependent on the switching speed

1.8 Circuit-breakers, switch-disconnectors

Undervoltage releases, shunt releases, capacitor unit

1

NZM...-XU, NZM...-XA...

			NZM112/31-XU...	NZM4-XU...
Undervoltage releases				
Rated control voltage				
AC voltage at 50/60 Hz	U_s	V AC	24...600	24...600
DC voltage	U_s	V DC	12...250	12...250
Operating range				
Drop-out voltage	$x U_s$		0.35–0.7	0.35–0.7
Pick-up voltage	$x U_s$		0.85–1.1	0.85–1.1
Power consumption				
AC voltage				
AC pick-up rating	VA		1.5	3.6
AC consumption when closed	VA		1.5	3.6
DC voltage				
DC pick-up rating	W		0.8	2.5
DC consumption when closed	W		0.8	2.5
Max. opening delay(response time until the main circuits open)				
Minimum signal duration	ms			
Terminal capacities				
Solid or flexible conductor with ferrule	mm ²	1X(0.75-2.5)	1X(0.75-2.5)	1X(0.75-2.5)
		2X(0.75-2.5)	2X(0.75-2.5)	2X(0.75-2.5)
	A WG	1X(18-14)	1X(18-14)	1X(18-14)
		2X(18-14)	2X(18-14)	2X(18-14)

			UVU-NZM	NZM-XCM	
Undervoltage releases, off-delayed					
Rated operating voltage					
AC voltage at 50/60 Hz	U_e	V AC	24, 220–550	Rated operating voltage	U_e V AC
DC voltage	U_e	V DC	24	Rated operational current	I_e mA
Inrush current (peak value)	I_e	mA	<500	Inrush current{peak value)	I_e A
Power consumption	V A		50	Terminal capacity	
Deceleration time	t_{sd}	ms	70–4000	Solid or flexible conductor with	mm ² 1 x (0.5–2.5)
With additional external capacitor 90,000 uF- 35 V	s	To 16		ferrule	AW 1 x (20–14)
With additional external capacitor 30,000 uF- 35 V	s	To 8		G	2x120–16)
Terminal capacities					
Solid or flexible conductor with ferrule	mm ²	1 x (0.5–2.5) 2 x 10.5–1.5)			

			NZM112/31-XA...	NZM4-XA...	NZM2/3-XA...-MNS	NZM4-XA...-MNS
Shunt releases (for power circuit breaker)						
Rated control voltage						
AC voltage	U_s	V AC	12...440	12...440	230	230
DC voltage	U_s	V DC	12...440	12...440	–	–
Frequency range	Hz		0–400	0–400	50/60	50/60
Operating range						
AC voltage	$x U_s$		0.7...1.1	0.7...1.1	0.1...1.1	0.1...1.1
DC voltage	$x U_s$		0.7...1.1	0.7...1.1	–	–
Power consumption						
AC/DC pick-up rating	VA/W		2.5	2.5	–	–
AC/DC consumption when closed	VA/W		2.5	2.5	–	–
Maximum power consumption at 110% I_n (230 V 50 Hz)	A		–	–	0.5	1
Max. opening delay (response time until the main circuits open)	ms			22	20	22
Max. duty factor	ms	∞		∞	1000ms	1000ms
Minimum signal duration	ms	10–15		10–15	10–15	10–15
Terminal capacity						
Solid or flexible conductor with ferrule	mm ²	1 x (0.75–2.5)	1 x (0.75–2.5)	1 x (0.75–2.5)	1 x (0.75–2.5)	1 x (0.75–2.5)
		2 x (0.75–2.5)	2 x (0.75–2.5)	2 x (0.75–2.5)	2 x (0.75–2.5)	2 x (0.75–2.5)
	AWG	1x(18-14)	1x(18-14)	1x(18-14)	1x(18-14)	1x(18-14)
		2x(18-14)	2x(18-14)	2x(18-14)	2x(18-14)	2x(18-14)

			NZM2-XRD...	NZM2-XR...	NZM3-XR...	NZM4-XR...
Remote operators						
Rated control voltage						
AC voltage	U _s	V AC	100...440	100...440	100...440	100...440
DC voltage	U _s	V DC	24...250	24...250	24...250	24...250
Operating range						
AC voltage			0.85...1.1	0.85...1.1	0.85...1.1	0.85...1.1
DC voltage			0.85...1.1	0.85...1.1	0.85...1.1	0.85...1.1
Rated operational power						
AC voltage	110 V...130VAC	VA	550	350	350	350
	208 V...240 V AC	VA	550	350	350	350
	380 V...440 V AC	VA	650	350	350	350
DC voltage	24 V...30 V D C	W	450	250(max. 17A 30 ms)	250	250
	110 V...130VDC	W	450	250	250	250
	220 V...250 V DC	W	450	250	250	250
Total make time		ms	110-170	60	80	100
Total opening delay		ms	110-170	3000	1000	3000
Minimum signal duration						
With switch on		ms	30	30	30	30
With switch off		ms	500	150	250	500
Lifespan, mechanical	Operations		20000	20000	15000	10000
Maximum operating frequency	Opa/h		120	120	60	20
Terminal capacities						
Solid or flexible conductor with ferrule		mm ²	0.75–2.5	0.75–2.5	0.75–2.5	0.75–2.5
		AWG	18–14	18–14	18–14	18–14
			PFR-003	PFR-03	PFR-5	
Electrical						
Standards			IEC/EN 60947-2, IEC 755, IEC 1008, IEC 1009			
Sensitivity			Pulse-current sensitive, type A			
Rated control voltage	U _s	V AC	230 120% (50/60 Hz)			
Motor rating	P _e	W	3	3	3	
Rated fault currents	I _{Δn}	A	0.03	0.03	0.03,0.1,0.3,0.5,3,5	
Deceleration time	t _v	s	0.02 (non-delayed)	0.02 (non-delayed)	0.02,0.1,0.3,0.5,3,5	
Relay contacts			1 built-in changeover contact	1 built-in changeover contact	1 built-in changeover contact	
Rated operating voltage of the relay contacts		VAC/DC	250/100	250/100	250/100	
Rated operational current of the relay contacts		A	6	6	6	
Fault current early warning		Hz	–	–	0.5=25%–50%I _{Δn} 1=50%–75%I _{Δn} 2=75%–100%I _{Δn}	
Mechanical						
Standard front dimension		mm	45	45	45	
Device height		mm	85	85	85	
Built-in width		mm	36	36	36	
Mounting			Quick attachment fortop-hat rail DIN 46277, EN 50022			
Terminals top and bottom			Boxterminals			
Terminal protection			Finger and back-of-hand proof BGV A2, VDE 106 Part 100			
Terminal capacities		mm ²	2 x 0.75–2.5 solid, 2 x 0.75–1.5 flexible/with sleeve			
Sealing facility for setting buttons			–	–	Yes	

NZM...-XFI...

			NZM11-41-XFI30R NZM11-41-XFI300R NZM11-41-XFIR	NZM11-41-XFI30U NZM11-41-XFI300U NZM11-41-XFIU	+NZM2-4-XFI30 +NZM2-4-XFI	+NZM2-4-XFIA30 +NZM2-4-XFIA NZMH2... XFIA30
Electrical						
Standards			IEC/EN 60947-2			
Sensitivity			Pulse-current sensitive, type A			
Min. operating voltage						
For detecting type A/AC fault currents			80 V (dependent on mains power)	80 V (dependent on mains power)	80 V (dependent on mains power)	80 V (dependent on mains power)
For detecting type B fault currents			–	–	–	–
Suitable for use in						
			Three-and single-phase systems	Three-and single-phase systems	Three-and single-phase systems	Three-and single-phase systems
Rated operating voltage	U_e	V AC	200...415 (3~)	200...415 (3~)	280..690	50...400 (3~)
Rated frequency	f	Hz	50/60	50/60	50/60	50/60
Number of poles			3/4	3/4	3/4	3/4
Rated operational current range	I_n	A	15...160	15...100	15...250	15...250
Rated fault currents	$I_{\Delta n}$	A				
NZM1)-4)-XFI30R			0.03			
NZM1)-4)-XFI300R			0.3			
NZM1)-4)-XFIR			0.03-0.1-0.3-0.5-1-3			
NZM1)-4)-XFI30U				0.03		
NZM1)-4)-XFI300U				0.3		
NZM1)-4)-XFIU				0.03-0.1-0.3-0.5-1-3		
+NZM2-4-XFI30					0.03	
+NZM2-4-XFI					0.03-0.1-0.3-0.5-1-3	
+NZM2-4-XFIA30						0.03
+NZM2-4-XFIA						0.3-1
NZMH2... XFIA30						0.03
Detection range of fault current			50/60 Hz	50/60 Hz	50/60 Hz	With AC voltage: 0–100 kHz With pulsed DC voltage: 50 Hz
Rated ultimate short-circuit making and rated breaking capacity						
	$I_{\Delta m}$	A	=Lcu	=Lcu	=Lcu	=Lcu
Fault current early warning			$\geq 0.3 \times I_{\Delta n}$	$\geq 0.3 \times I_{\Delta n}$	–	–
Shock resistance (IEC 60068-2-27)			20(ha1f-sinusoidal shock20 ms)			
Lifespan, mechanical (50%with fault current)	Operations		20000	20000	≥ 20000	≥ 20000 NZMH2: 20000
Mechanical						
Standard front dimension	mm		45	45	96	96
Mounting			On right side	Bottom	Bottom	Bottom
Mounting position			Vertical and 90° in all directions			
Feeder			NZM1 from above	NZM1 from above	Any	Bottom
Degree of protection	$^{\circ}\text{C}$		IP20 in the operating component area			
Ambient temperature			-5...+40	-5...+40	-25...+70	-25...+70
Terminal capacities						
Flexible without ferrule	mm ²		Same as NZM1 standardterminal			
Flexible with ferrule	mm ²		Same as NZM1 standardterminal			
Sealability			Yes, setting buttons			

NZM...-XU, NZM...-XA...

1

			DMI
General			
Dimensions (W x H x D)	mm		107.5 x 90 x 53
Modular spacing(space units)			6 SU (space units) wide
Weight	kg		0.3
Mounting			Top-hat rail IEC/EN 60715, 35 mm
Ambient climatic conditions			
Operating ambienttemperature	°C		0 to +55
Built-in position			Horizontal/vertical
Condensation			Prevent condensation by means of suitable measures
LCD display (clearly legible)	°C		0 to +55
Storage/transport	°C		-40 to +70
Relative humidity, non-condensing (IEC/EN 60068-2-30)	%		5 ...95
Air pressure(in operation)	hPa		795...1080
Corrosion resistance			
IEC/EN 60068-2-42	4 days SO ₂	cm ³ /m ³	10
IEC/EN 60068-2-43	4 days HZ _S	cm ³ /m ³	1
Ambient mechanical conditions			
Pollution degree			2
Degree of protection IEC/EN 60529			IP20
Vibrations (IEC/EN 60068-2-6)			
Constant amplitude 0.15 mm		Hz	10...57
Constant acceleration, 2 g		Hz	57...150
Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11		Shocks	18
Drop IEC/EN 60068-2-3	Drop height	mm	50
Free fall, packaged (IEC/EN 60068-2-32)		m	1
Power supply			
Rated operating voltage	U _e	V DC	24
Permissible range		V DC	20.4...28.8
Residual ripple		%	≤ 5
Input current at 24 V DC		mA	210
Voltage dips (IEC/EN 61131-2)		ms	10
Power loss at 24 V DC		W	5

EASY22..., NZM-XDMI

				EASY221-C0	EASY222-DN	NZM-XDMI-DPV1
General						
Standards	EN 55011, EN 55022, EN 61000-4, IEC 60068-2-6, IEC 60068-2-27					
Dimensions (VV x H x D)	mm	35.5x90x58 (2 space units)	35.5x90x58 (2 space units)	35.5x90x58 (2 space units)		
Weight	kg	0.15				
Mounting	Top-hat rail EN 50022, 35 mm or screw fixing using fixing brackets ZB4-101-GFi (accessories)					
Terminal capacity						
Solid	mm ²	0.2x4 (AWG 22–12)				
Flexible with ferrule	mm ²	0.2x2.5 (AWG 22–12)				
Standard screwdriver	mm	3.5 x 0.8	3.5 x 0.8	3.5 x 0.8		
Max. tightening torque	Nm	0.6	0.6	0.6		
Ambient climatic conditions						
Operating ambient temperature	°C	-25 to 55, low temperatures to IEC 60068-2-1, high temperatures to IEC 60068-2-2				
Condensation	Prevent condensation by means of suitable measures					
Storage	°C	40–70	40–70	40–70		
Relative humidity, non-condensing (IEC/EN 60068-2-30)	%	5–95	5–95	5–95		
Air pressure (in operation)	hPa	795–1080	795–1080	795–1080		
Corrosion resistance						
IEC/EN 60068-2-42	4 day SO ₂	cm ³ /m ³	10	10	10	
IEC/EN 60068-2-43	4 day SO ₂	cm ³ /m ³	1	1	1	
Ambient mechanical conditions						
Pollution degree			2	2	2	
Degree of protection (IEC/EN 60529)			IP20	IP20	IP20	
Vibrations (IEC/EN 60068-2-6)						
Constant amplitude 0.15 mm	Hz	10–57	10–57	10–57		
Constant acceleration, 2 g	Hz	57–150	57–150	57–150		
Mechanical shock resistance (IEC/EN 60068-2-27)	Shocks	18	18	18		
semi-sinusoidal 15 g/11ms						
Drop (IEC/EN 60 068-2-31)	Drop height	mm	50	50	50	
Free fall, packaged (IEC/EN 60068-2-32)		m	1	1	1	
Mounting position			horizontal x vertical	horizontal x vertical	horizontal x vertical	
Electromagnetic compatibility (EMC)						
Electrostatic discharge (IEC/EN 61000-4-2, Level 3, ESD)						
Air discharge						
Contact discharge	kV	8	8	8		
Electromagnetic fields (IEC/EN 61000-4-3, RFI)	kV	6	6	6		
Radio interference suppression (EN 55011)	V/m	10	10	10		
Burstimpulse (IEC/EN 61000-4-4, Level 3)			EN 55011 ClassB		EN 55011 ClassA	
Supply cables			EN 55022 ClassB		EN 55022 ClassA	
Signal cables	kV	2	2	2		
High-energy pulses (surge)	kV	2	2	2		
(IEC/EN 61000-4-5, Level 2)	kV	0.5 (supply cables, symmetrical)				
Immunity to line-conducted interference (IEC/EN 61000-4-6)	V	10	10	10		

EASY..., NZM-...

Insulation resistance		EASY221-CO	EASY222-DN	NZM-XDMI-DPV1
Clearances and creepage distances		EN 50178, UL 508, CSA C22.2, No. 142		
Insulation resistance				
Power supply				
Rated operating voltage	U _e	V 24 (-15/+20%)	24 (-15/+20%)	24 (-15/+20%)
Permissible range		V DC 20.4-28.8	20.4-28.8	20.4-28.8
Ripple		% < 5	< 5	< 5
At 24 V D C		mA typ. 200	typ. 200	typ. 200
Voltage dips (IEC/EN 61131-2)		ms 10	10	10
Heat dissipation at 24 V DC	W	4.8	4.8	4.8
Polarity reversal protection				
Power supply		Yes	Yes	Yes
LED indicators				
Power supply		RUN LED (RUN1: green)	Module status LED (MSS: green)	Power LED (POW):green
LED display		LED ERROR (ERR1: red)	Network status LED (NSF: red/green)	PROFIBUS—DP LED (BUST: red/green)
Network				
Terminal type		RJ45	5 pole, pluggable screw terminal	SUB-D 9 pole, socket
Potential isolation		Between bus and power supply (simple, between bus and power supply and NZM-XDM1612 safe isolation)	Between bus and power supply (simple, between bus and power supply and NZM-XDM1612 safe isolation)	Between bus and power supply (simple, between bus and power supply and NZM-XDM1612)
Function		CANopen slave	DeviceNet slave	PROFIBUS—DP slave
Interface		CAN	CAN	RS 485
Bus protocol		CANopen	DeviceNet	PROFIBUS—DP
Baud rates		Automatic search up to 1 MBit/s	Automatic search up to 500 kBit/s	Automatic search up to 12 MBit/s
Bus terminating resistors		Separate external bus termination required (120 Ω) NZM-XDM1612	Separate external bus termination required (120 Ω) NZM-XDM1612	Separate external bus termination required
Bus addresses		1–127 addressed via display	0–63 addressed via display	1–126 via DMI
Services				
Cyclical		All data R1–R16, S1–S8	All data R1–R16, S1–S8	Status On/Off, tripped (detailed) load early warnings, phase currents I _h /h/13[A], remote operator activation, display/operation NZM-XDM1612 inputs/outputs, motor starter functions
Acyclical		Read/write, real-time, day, summer/winter time, all parameters of the easyfunction relay	Read/write, real-time, day, summer/winter time, all parameters of the easyfunction relay	Display/match protection protection settings, event list, identification, hours of operation, switching operations, time

NZM-XSWD

			NZM-XSWD-704
General			
Standards			IEC/EN 61131-2 EN 50178
Dimensions (W x H x D)	mm		35 x 90 x 101
Weight	kg		0.1
Mounting			Top-hat rail IEC/EN 60715, 35 mm
Built-in position			Vertical
Ambient mechanical conditions			
Degree of protection (IEC/EN 60529)			IP20
Vibrations IEC/EN 61131-2:2008			
Constant amplitude 3.5 mm	Hz		5 ... 8.4
Constant acceleration, 1 g	Hz		8.4 ... 150
Mechanical shock resistance (IEC/EN 60068-2-27)	Shocks		9
semi-sinusoidal 15 g/11 ms			
Drop (IEC/EN 60068-2-31)	Drop height	mm	50
Free fall, packaged (IEC/EN 60068-2-32)		m	0.3
Electromagnetic compatibility (EMC)			
Overvoltage category			II
Pollution degree			2
Electrostatic discharge (IEC/EN 61131-2:2008)			
Air discharge (Level 3)	kV		8
Contact discharge (Level 2)	kV		4
Electromagnetic fields (IEC/EN 61131-2:2008)			
80 -1000 M Hz	V/m		10
1.4-2 GHz	V/m		3
2-2.7 GHz	V/m		1
Radio interference suppression (SmartWire-Darwin)			EN 55011 Class A
Burst (IEC/EN 61131-2:2008, Level 3)			
Supply cables	kV		2
Signal cables	kV		1
SmartWire-Darwin cables	kV		1
Surge (IEC/EN 61131-2:2008, Level 1)			
Radiated RFI IEC/EN 61131-2:2008, Level 3	V		10
Ambient climatic conditions			
Operating ambient temperature (IEC 60068-2)	°C		-25 ... +55
Condensation			Prevent with suitable measures
Storage	°C		-40 ... 70
Relative humidity, non-condensing (IEC/EN 60068-2-30)	%		5 ... 95
SmartWire-Darwin status			
Station type			SmartWire-Darwin station (slave)
Baud rate setting			Automatic
SmartWire-Darwin status	LED		Green
Connection			8-pin connector Connection plug: External device plug SWD4-8SF2-5
Power consumption (15 V SWD supply)			See separate table
Supply and I/O connection			
Connection type			Push-In
Solid	mm ²		0.2-1.5 (AWG 24-16)
Flexible with ferrule's	mm ²		0.25-1.5
24 V DC supply for output supply			
Rated operating voltage	U _e	V	-
Input voltage residual ripple		%	-
Polarity reversal protection reversal			-

1) Minimum length 8 mm

NZM-XSWD

1

			NZM-XSWD-704
Digital inputs			
Number			2
Input current		mA	Typically 4 at 24 V DC
Voltage level to IEC/EN 61131-2			
Limit value type 1			Low < 5 V DC; High > 15 V DC
Input delay			High →Low typically < 0.2 ms Low →High typically < 0.2 ms
Status display inputs		LED	Yellow
Digital semiconductor outputs			
Number			2
Output current		A	0.2 at 24 V DC
Short-circuit tripping current		A	–
Lamp load	R_{LL}	W	–
Overload proof			Yes, with diagnostics
Switching capacity			EN 60947-5-1 utilization category DC-13
Relay outputs			
Number			–
Contact type			–
Operations			–
Utilization category AC-1, 250 V, 6 A			–
Utilization category AC-15, 250 V, 3 A			–
Utilization category DC-13, 24 V, 1 A		V AC	–
Safe disconnection		mA	–
Minimum load current			–
Response/reset time		mS	–
Bounce duration		mS	–
Short-circuit protection			–
Status display outputs		LED	–
Potential isolation			
Inputs for SmartWire-Darwin			Yes
Semiconductor outputs to SmartWire-Darwin			Yes
Semiconductor outputs to inputs			–
Relays to SmartWire-Darwin			–
Relays to inputs			–
Relays to relays			–

NZM-...XMC

General		NZM2-XMC-S0	NZM3-XMC-S0	NZM2/3-XMC-MB
Dimensions	mm	209 × 91 × 132 (3 pole) 251 × 91 × 132 (4 pole)	209 × 91 × 132 (3 pole) 251 × 91 × 132 (4 pole)	209 × 91 × 132 (3 pole) 251 × 91 × 132 (4 pole)
Weight	g	850 (3 pole) 975 (4 pole)	850 (3 pole) 975 (4 pole)	850 (3 pole) 975 (4 pole)
Material characteristic		UL94-V0	UL94-V0	UL94-V0
Environmental conditions				
Operating temperature	°C	-15+65	-15+65	-15+65
Storage temperature	°C	-40+80	-40+80	-40+80
Humidity (non-condensed)	%	5-95	5-95	5-95
Maximum operating altitude	m	2000	2000	2000
IP protection class		IP 20	IP 20	IP 20
Supply				
Voltage	V DC	18 – 36	18 – 36	18 – 36
Maximum current	mA	200	200	200
Conductors		Phoenix Contact GMVSTBR 2.5-2-ST-7.62	Phoenix Contact GMVSTBR 2.5-2-ST-7.62	Phoenix Contact GMVSTBR 2.5-2-ST-7.62
Voltage measurement				
Rated operating voltage	V AC	690	690	690
Maximum surge voltage at 8/加1ms	kV	8	8	8
Maximum voltage	V AC	800	800	800
Surge impedance (impedance)	kohms	1	1	1
Frequency	Hz	45-65	45-65	45-65
Accuracy		0.4 % measured value +0.05 % FS	0.4 % measured value +0.05 % FS	0.4 % measured value +0.05 % FS
Overvoltage category according to EN61010		CAT IV (600 V)	CAT IV (600 V)	CAT IV (600 V)
Current measurement				
Rated operational current	A AC	300	500	300 (NZM2)/500 (NZM3)
Maximum current	A AC	350	740	30
Maximum current impulse 1s	kA	30	30	30
Frequency	Hz	45-200	45-200	45-200
Category EN61010		CAT IV-600 V	CAT IV-600 V	CAT IV-600 V
Power measurement				
Maximum power (per phase)	kwh	–	–	280
Accuracy		–	–	0.95 % measurement + 0.05 % FS
Accuracy, active power		Class 1 (IEC62053-21)	Class 1 (IEC62053-21)	Class 1 (IEC62053-21)
Accuracy, reactive energy		–	–	Class 2 (IEC62053-23)
Pulse output				
Output type		NPN-isolated transistor	NPN-isolated transistor	NPN-isolated transistor
VCE max	V	80	80	80
VCE sat	V	0.4	0.4	0.4
Ic max	mA	50	50	50
Ic recommended	mA	10	10	10
Isolation	kV	3	3	3
Max. switching frequency	Hz	2	2	4
Pulse width	ms	120	120	≥20
Pulse rate power	Pulses/kN	15	7.5	
Digital output				
Type		–	–	
Maximum voltage	V	–	–	350
Maximum current	mA	–	–	120
Isolation	kV	–	–	2.5
Digital input				
Maximum voltage	V	–	–	50
VIHmax	V	–	–	3
MODBUS output-RS485				
Data rate	bit/s	–	–	9600, 19200, 38400, 56000, 57600
Stop bits		–	–	1, 2
Parity		–	–	None, odd, even
Isolation	kV	–	–	3
Output-display				
DC supply voltage	VDC	–	–	5
Maximum current	mA	–	–	180


Dimensions

Circuit-breakers

Switch-disconnectors

3 pole

- NZMB1
- NZMC1
- NZMN1
- NZMH1
- PN1
- N1
- NS1

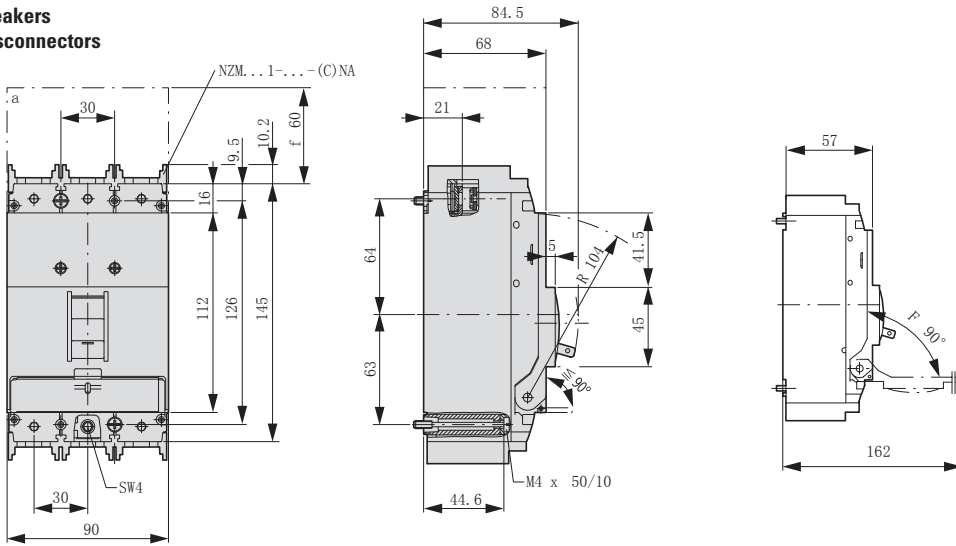


① Blow-out area, minimum distance to other parts ≧ 60 mm

Circuit-breakers

Switch-disconnectors

4 pole

- NZMB1-4
- NZMC1-4
- NZMN1-4
- NZMH1-4
- PN1-4
- N1-4

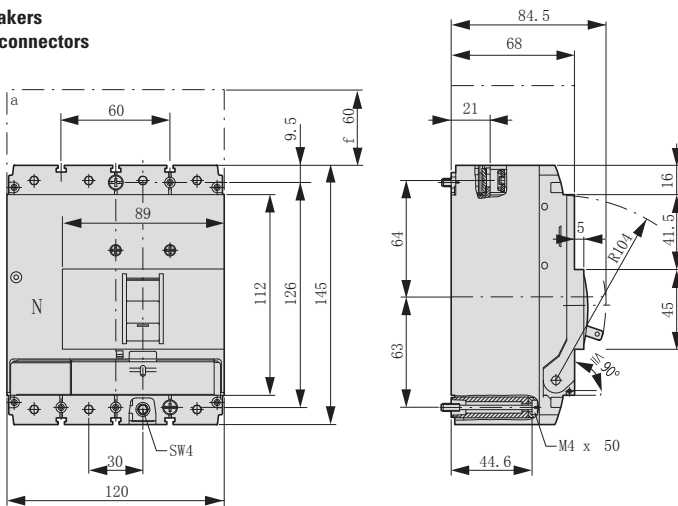

① Blow-out area, minimum distance to other parts ≧ 60 mm

Covers


NZM 11-41-XKSA

Screw terminals

NZM 11-41-XKS

IP2X protection against contact with a finger for cover

NZM1(4)-XIPA

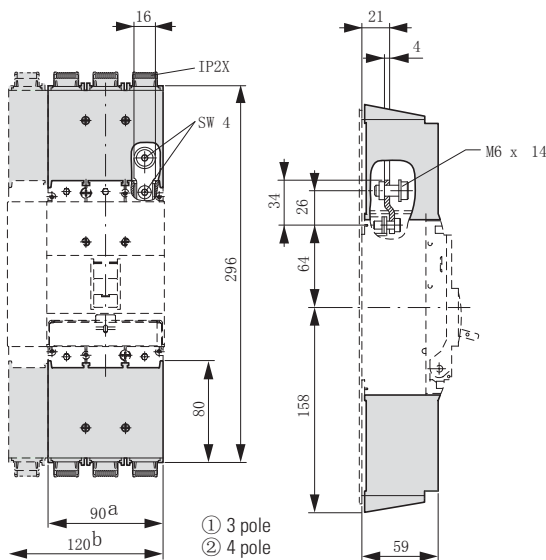


① 3 pole
② 4 pole

Switch-disconnectors

ATEX22-type

3 pole

PN 1../ATEX22

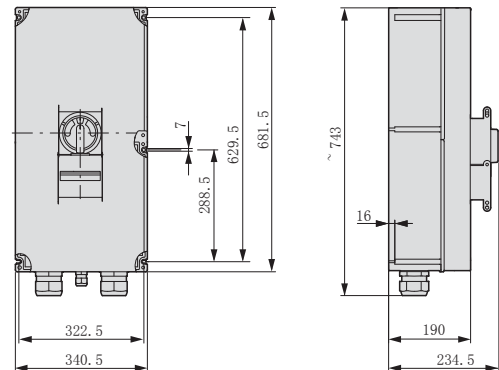

1.9

Circuit-breakers, switch-disconnectors


Auxiliary contacts, trip-indicating auxiliary contacts

1

NZM1...-XK..., NZM1...XIPK, NZM-XSTK

Tunnel terminal



NZM 11-41-XKA

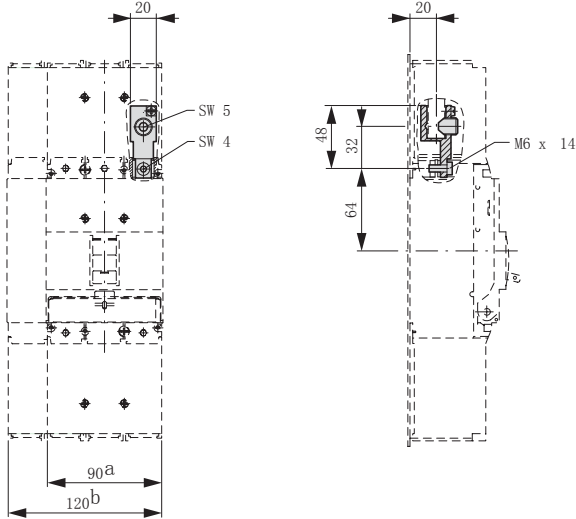

- ① 3 pole
- ② 4 pole


Rear terminal bolts

NZM 1141-XKR

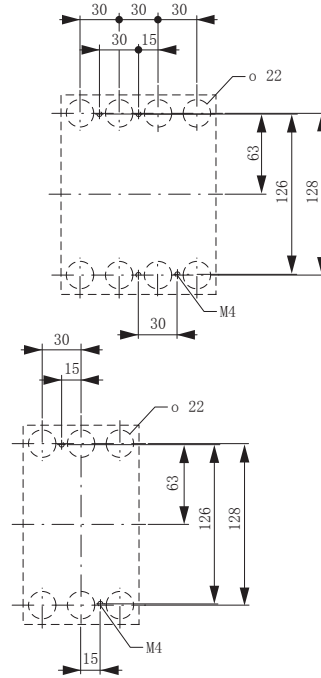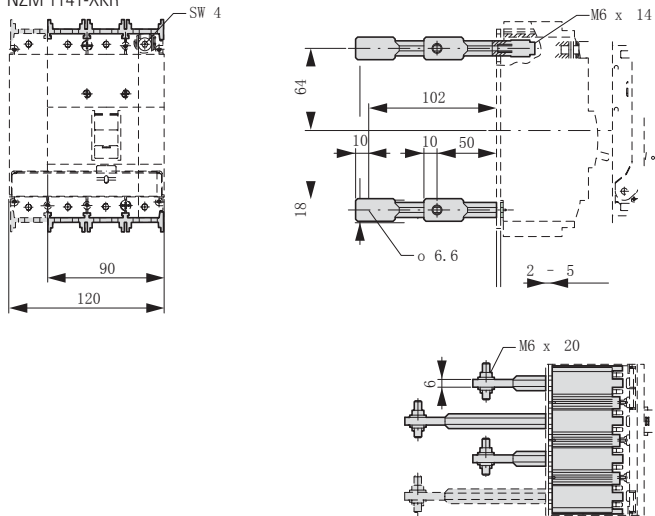

Control cable terminals


NZM1-XIPK, NZM-XSTK

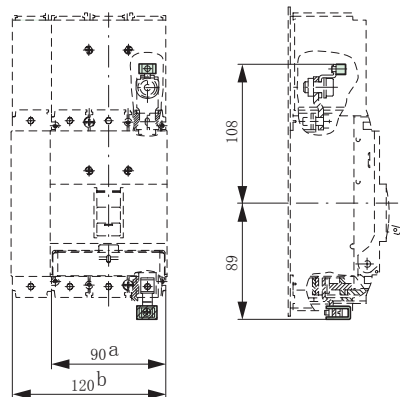

- ① 3 pole
- ② 4 pole

IP2X protection against contact with finger

NZM11-41-XIPK




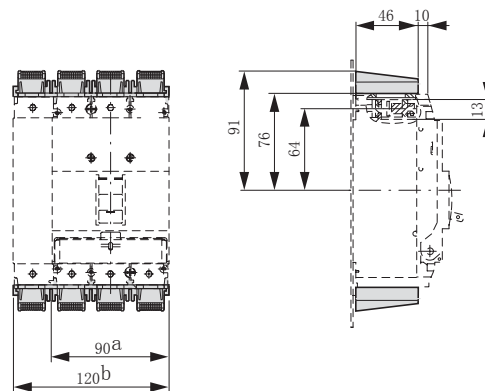


Rotary mechanism

Rotary handle on circuit-breaker






NZM1-XDV
NLM-XDVR

NZM1-XDTV

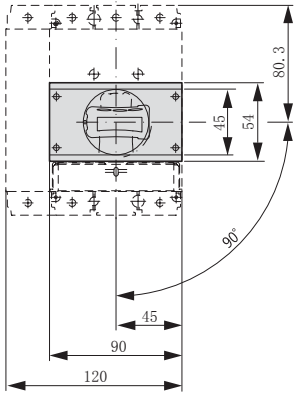

Door coupling rotary handles

NZM1-XTVDIVIRII-NA)

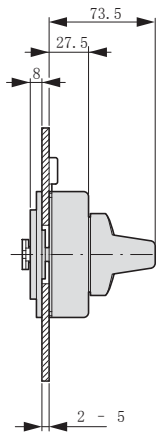

1.9 Circuit-breakers, switch-disconnectors


Construction size 1: accessories

1 NZM1-XTVD...


Door coupling rotary handle with extension shaft

NZM1-XTVDIVIIIRI-NA)


NZM 1/2-XV416)

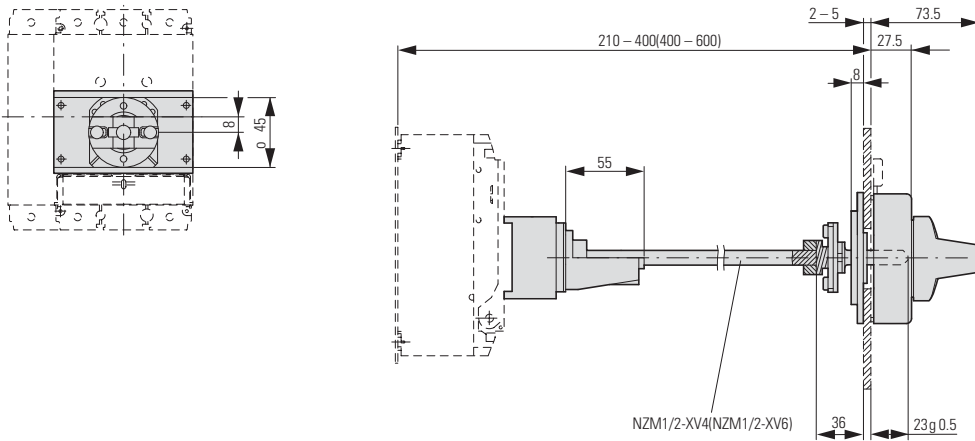


NZM1-XTVDIVIIIRI-601-NA)

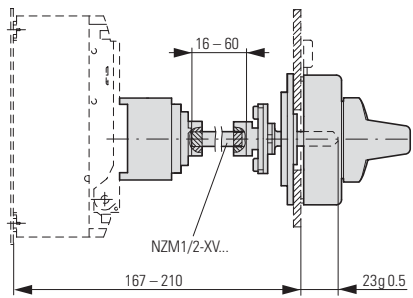

NZM1-XTVDIVIIIRI-0(-NA)

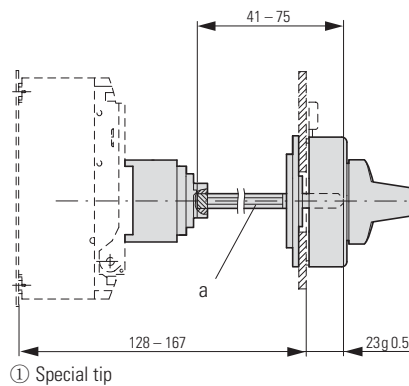


Minimum distance of door coupling rotary handle from door pivot point




NZM1-XS, NZM1...HIV


Main switch assembly kit for side wall installation
NZM1-XSIRI-L

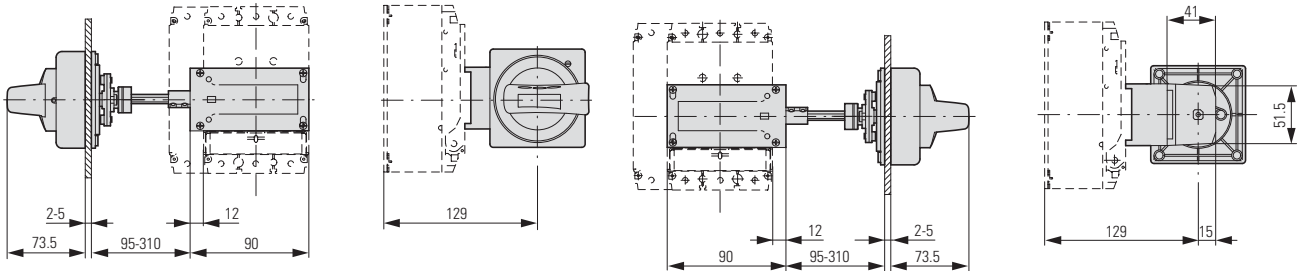


Main switch assembly kit for side wall installation with mounting bracket
NZM1-XSIRIM-L

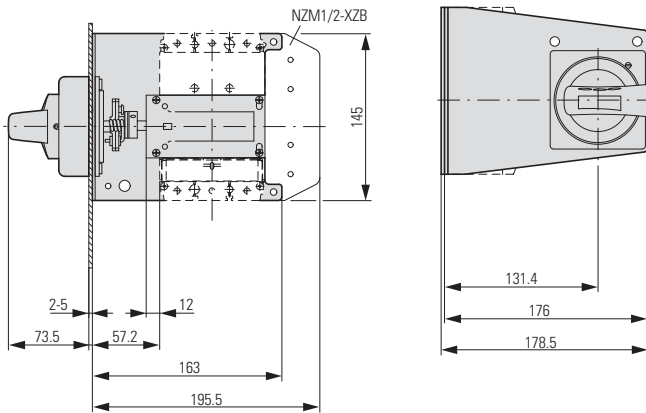

NZM1-XSIRIM-R

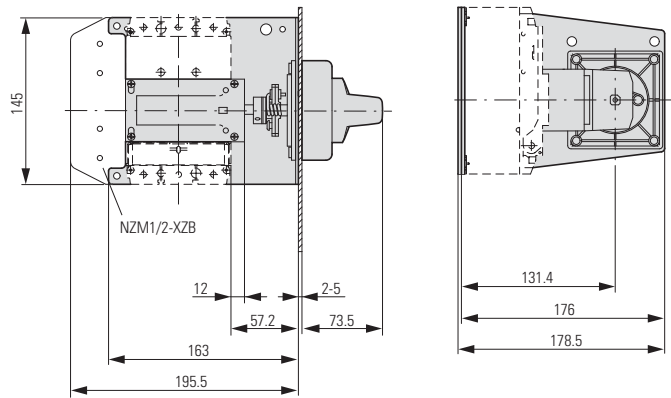


Undervoltage releases
Shunt releases (for power circuit breaker)
Early-make auxiliary contacts

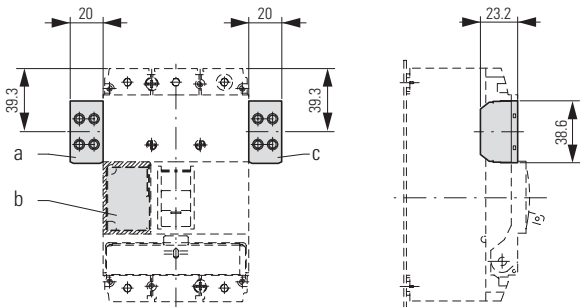


- ① NZM1-XA(HIV)
NZM1-XU(HIV)(20)
NZM1-XHIV
- ② NZM1-XA(HIV)(L)
NZM1-XU(V)(HIV)(L)(20)
NZM1-XHIV(L)
- ③ NZM1-XHIVR

Spacers
NZM1/2-XAB

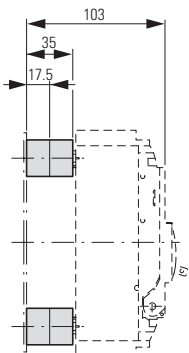

Clip plate
NZM1-XC35

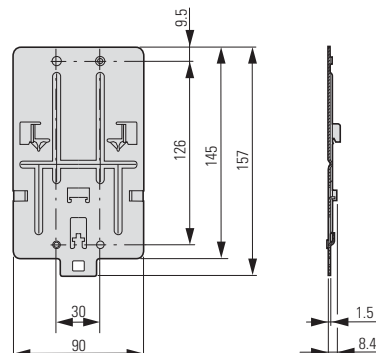


1.9

Circuit-breakers, switch-disconnectors


Construction size 1: accessories

1 NZM...-X...


Insulating surround NZM1-XBR

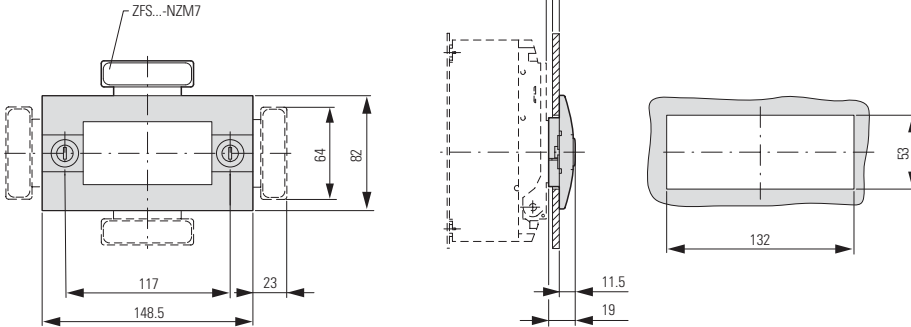

Insulating surround NZM1-XBR_S

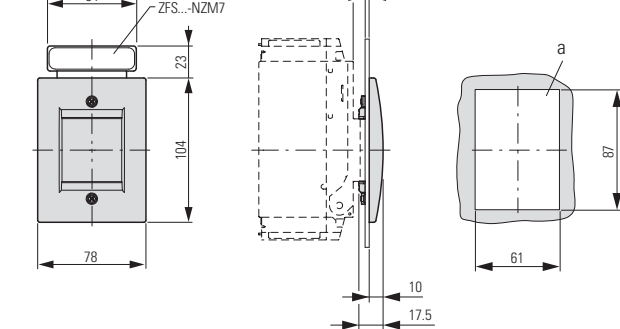


Rotary handle on switch with door interlock NZM1-XDTVIR)

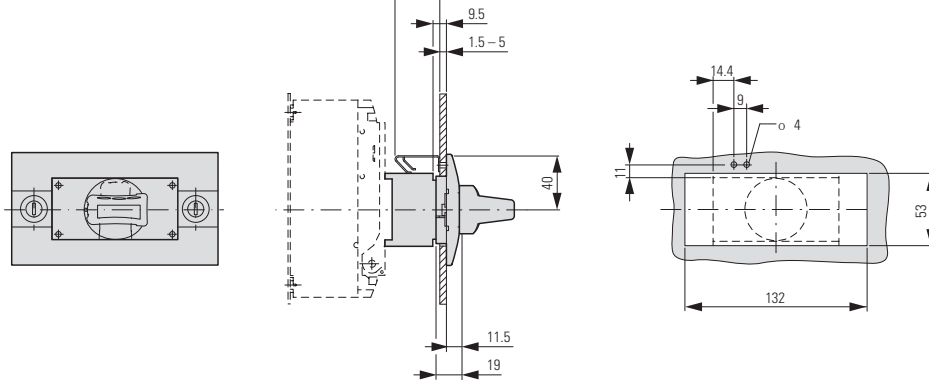


Rear-mounted drives

NZM1-XRAV(R)
NZM1-4-XRAVIR)

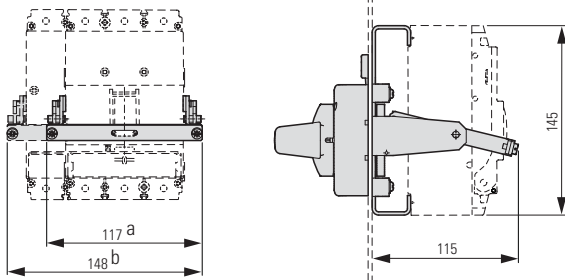


- ① NZM1-XRAV(R)
- ② NZM1-4-XRAV(R)



① Up to 3 padlocks


Toggle lever locking device NZM-XKAV

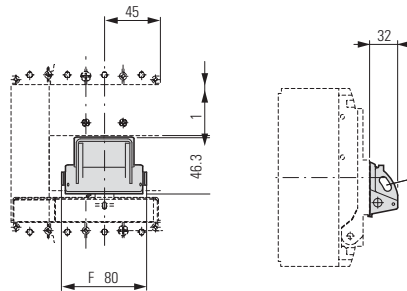


NZM1-XMV, NZM1-XTV...

Mechanical interlock

NZM1-XMV+NZM1-XDVIR)

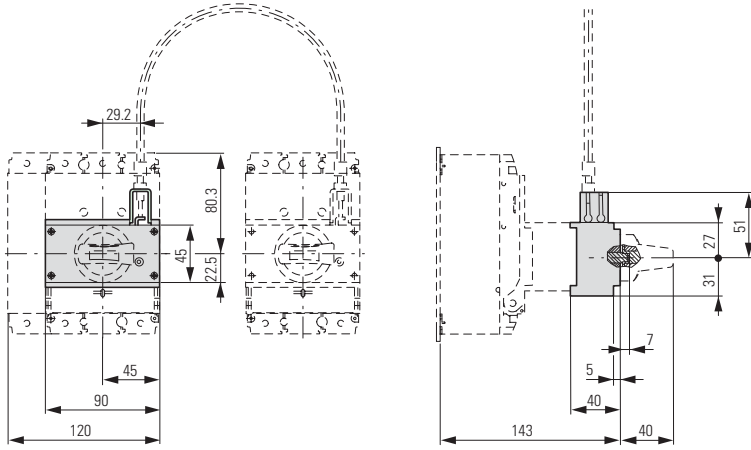


NZM1-XMV+NZM1-XTVDIVIR)

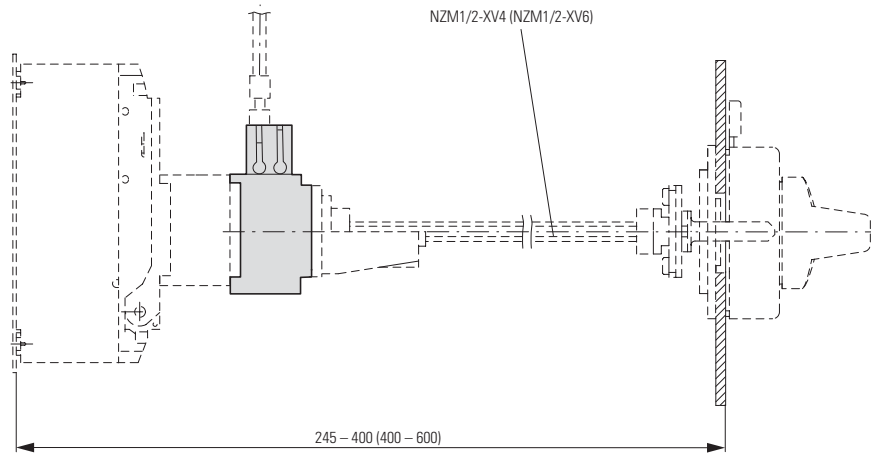


Part no.	x
NZM1/2-XV4	245 - 400
NZM1/2-XV6	400 - 600

NZM1-XMV+NZM1-XTVD(V)(R)-60

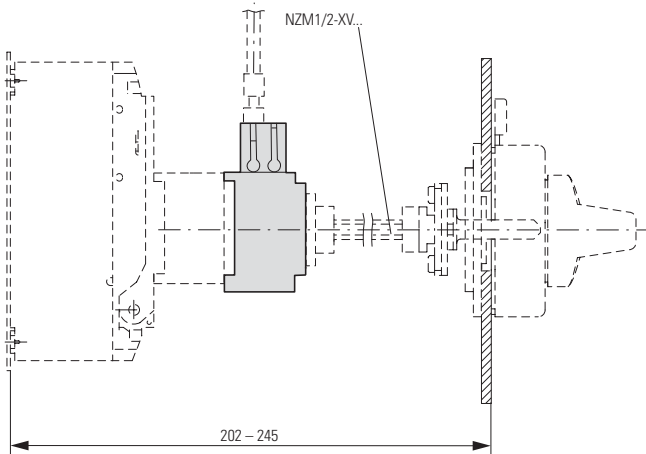

NZM1-XMV+NZM1-XTVD(V)(R)-60

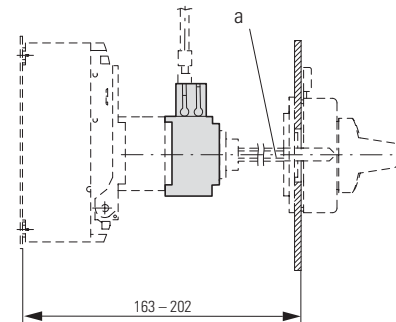

① Special tip

1.9


Circuit-breakers, switch-disconnectors

Construction size 1: accessories

1 PN1-XPA, NZM1-XCI..., NZM1-XAD, NZM1...XSVS


Paralleling mechanism

PN1-XPA

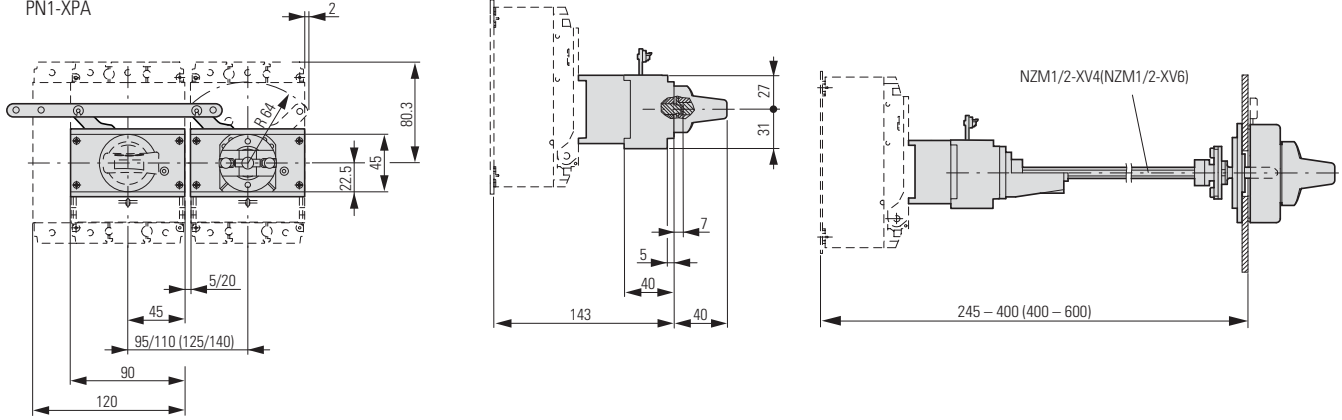


Insulated enclosures


NZM1-XCIKS-T

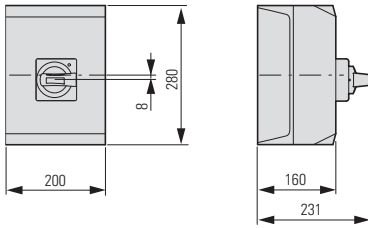


NZM1-XC123-T

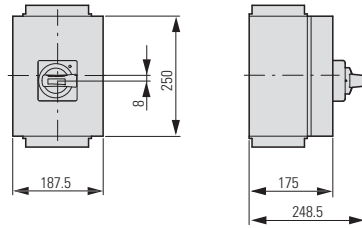

NZM1-XCI43-T




NZM 1-XC 143/2-T

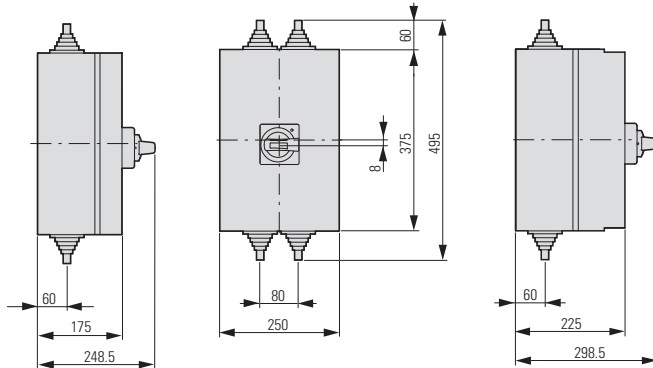



Component adapter

NZM1-XAD160



Plug-in units

NZM1-XSVS with
NZM.1...SVE
N1...SVE

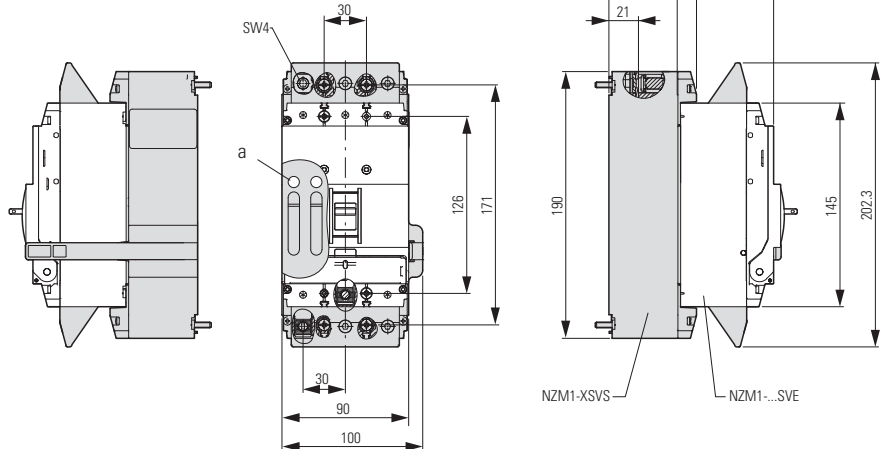


① Up to 2 padlocks

NZM1...-XFI..., PFR...


Residual-current relays

- PFR-003
- PFR-03
- PFR-5

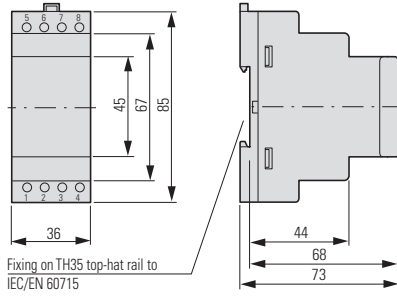


Ring-type transformer

- PFR-W-20...30



PFR-W-35...210

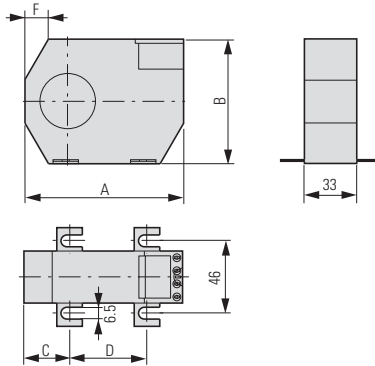


Part no.	F	G	H	I	J
PFR-W-20	32	60	24	46	21
PFR-W-30	32	70	30	59	30

	A	B	C	D	E	F
PFR-W-35	100	79	26	48.5	35	35
PFR-W-70	130	110	32	66	70	52
PFR-W-105	170	146	38	94	105	72
PFR-W-140	220	196	48.5	123	140	97
PFR-W-210	299	284	69	161	210	141


Mounting clip

- PFR-WC



Magnetic shielding


- PFR-WMA




Part no.	A	B	C	A1	A2
PFR-WMA-35	91	28	40	35	28
PFR-WMA-70	105	62	75	35	35
PFR-WMA-105	153	98	110	35	60
PFR-WMA-140	153	133	145	35	60
PFR-WMA-210	153	203	215	35	60

Earth-fault release

- NZM 11-41-XFL...R

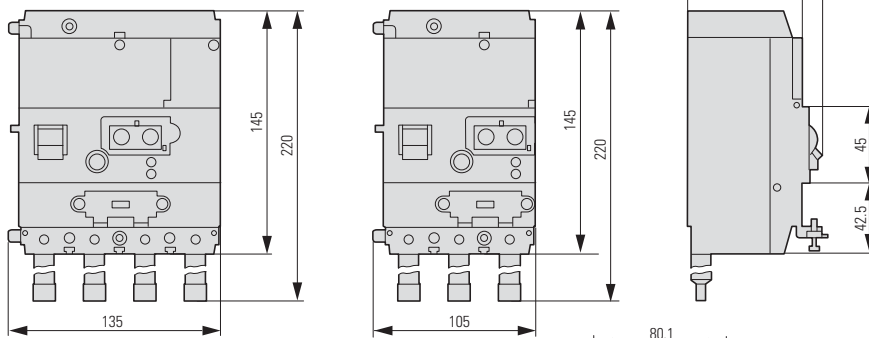

NZM1(4)-XFI...U

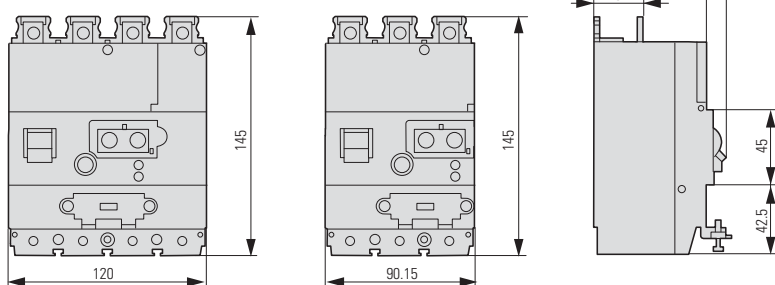

1.9

Circuit-breakers, switch-disconnectors

Construction size 2: basic devices

1


NZM2, PN2, N2, NS2

Circuit-breakers



Switch-disconnectors

3 pole

NZMB2
NZMC2
NZMN2
NZMH2
PN2
N2
NS2

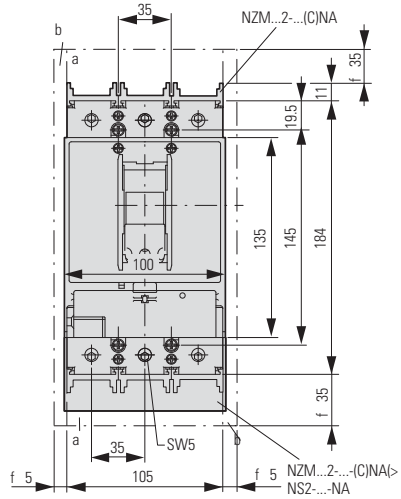

- ① Blow-out area, minimum distance to other parts 35 mm
- ② Minimum distance to adjacent parts ≤ 5 mm

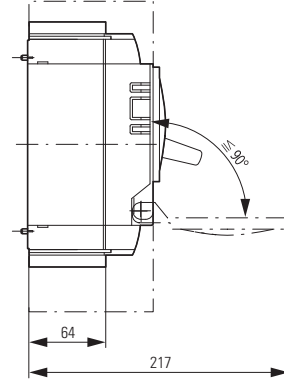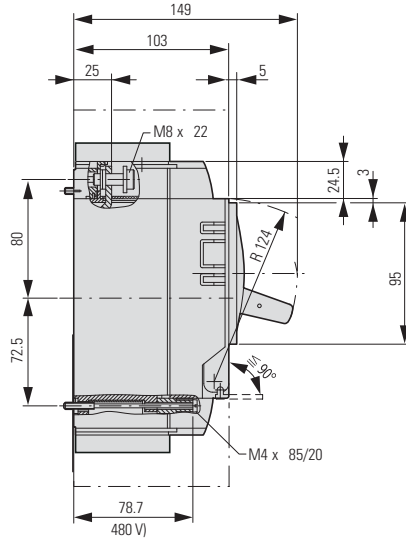


Circuit-breakers


Switch-disconnectors

4 pole

NZMB2-4
NZMC2-4
NZMN2-4
NZMH2-4
PN2-4
N 2-4

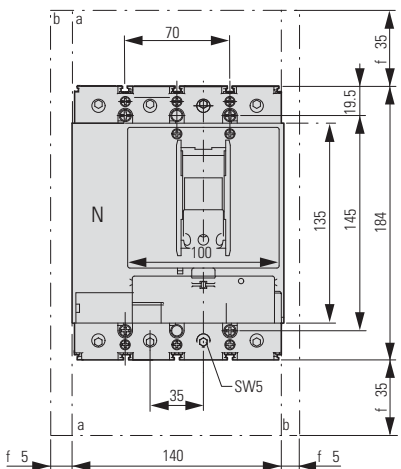

- ① Blow-out area, minimum distance to other parts 35 mm
- ② Minimum distance to adjacent parts 5 mm


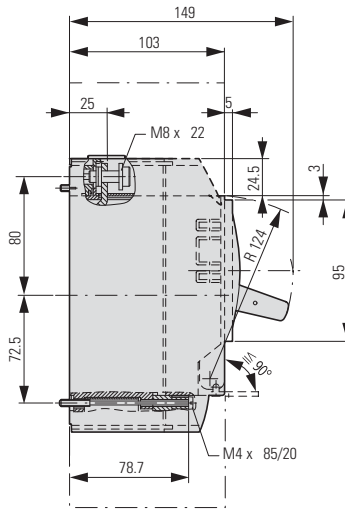


Switch-disconnectors

ATEX22-type

3 pole

PN2.../ATEX22

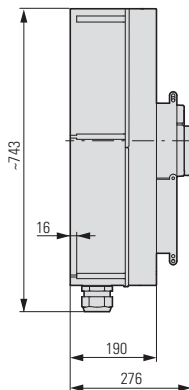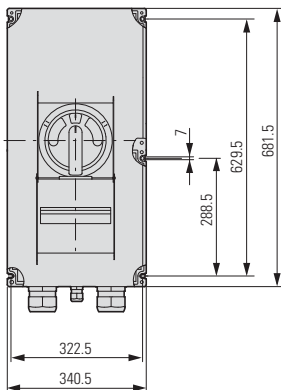


NZM2...-XK..., NZM2...-XIP..., NZM2-XST...

Box terminal

(+INZM21-4)---XKCI0IU)

IP2X protection against contact with finger


NZM21-41-XIPK

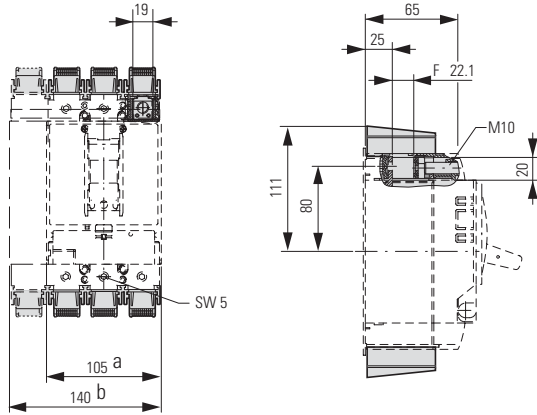

- ① 3 pole
- ② 4 pole

Tunnel terminal

NZM21-41-XKA

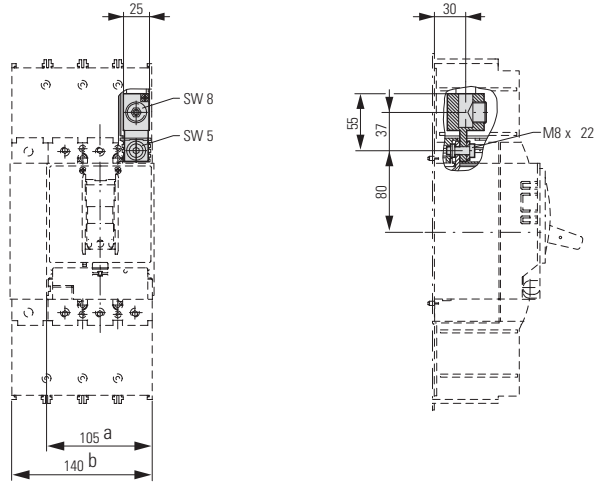

Covers


NZM21-41-XKSA

Cable lug

NZM2-XKS185


IP2X protection against contact with a finger for cover

NZM21-41-XI PA

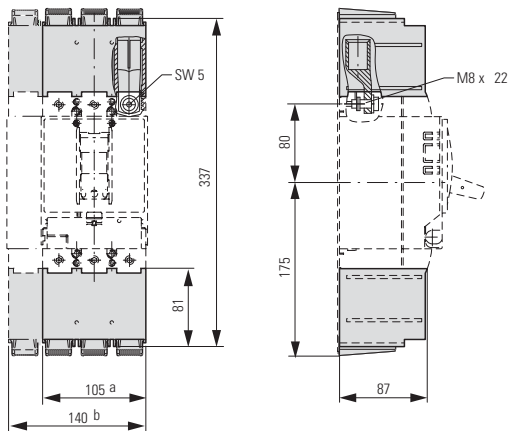

Cable lug cover


NZM2-141-XKSAE

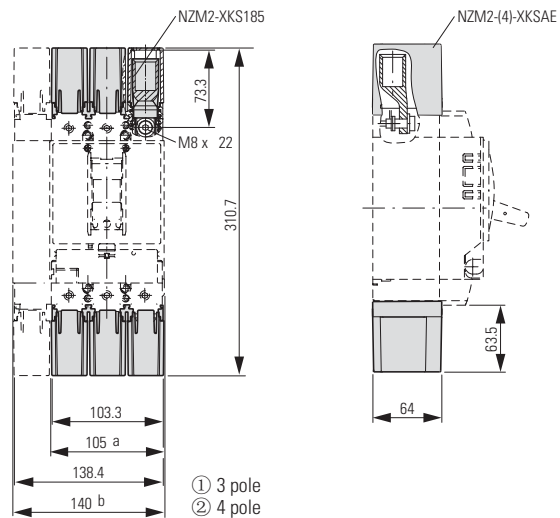

- ① 3 pole
- ② 4 pole

Jumper kit


NZM2-4-XKVP

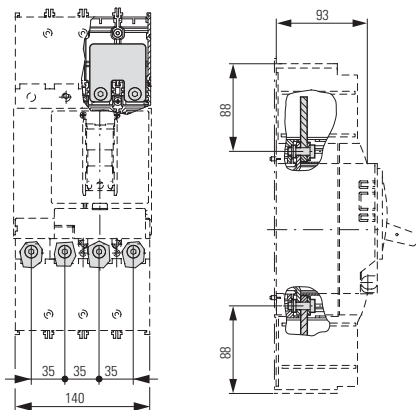

Control cable terminals

NZM2-XSTS

NZM-XSTK

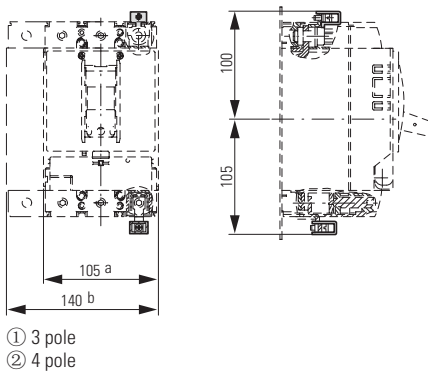


- ① 3 pole
- ② 4 pole

1.9 Circuit-breakers, switch-disconnectors


Construction size 2: accessories

1 NZM2...-XKR..., NZM2-XDV..., NZM2-XDTV...


Rear terminal bolts (+INZM21-41-XKRIOIU)

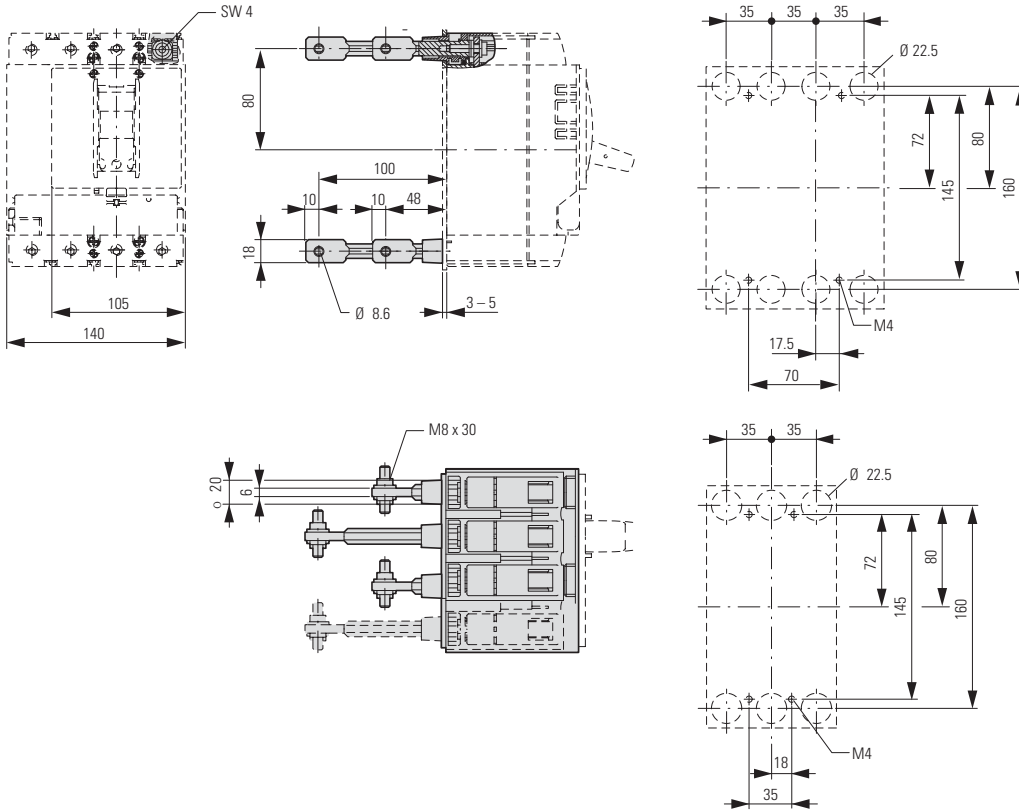



Rotary mechanism Rotary handle on circuit-breaker

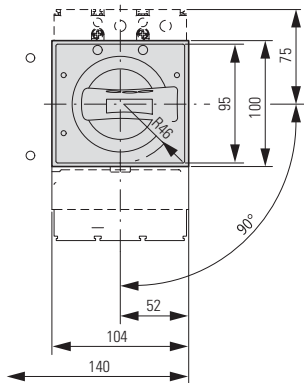

NZM2-XDV
NZM2-XDVR




NZM2-XDTV
NZM2-XDTV2



NZM2-XTV..., NZM1/2-XV4(6)

Door coupling rotary handles


NZM2-XTVDIVIRL..

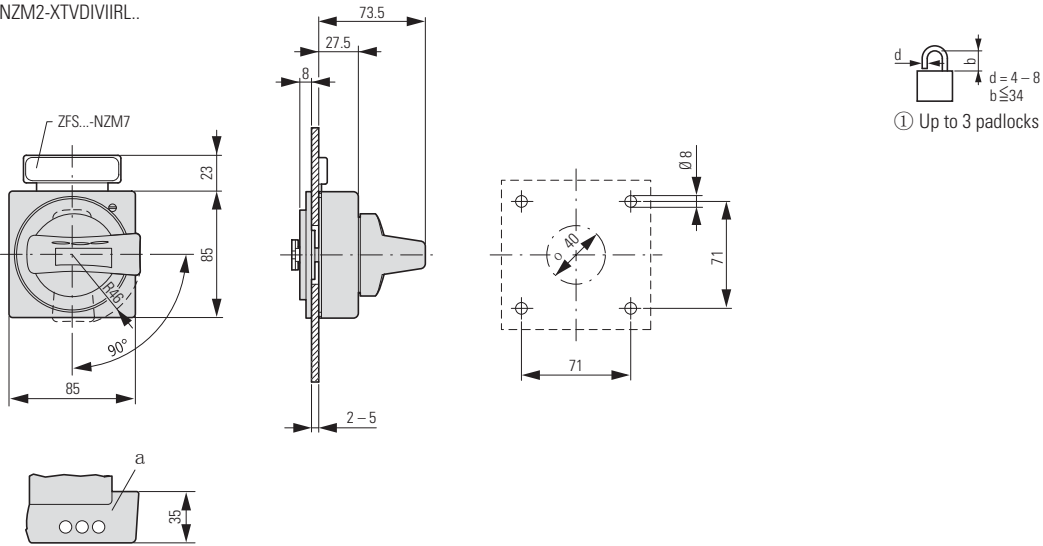

Door coupling rotary handle with extension shaft


NZM2-XTVDIVIRII-NA)

NZM 1/2-XV416)

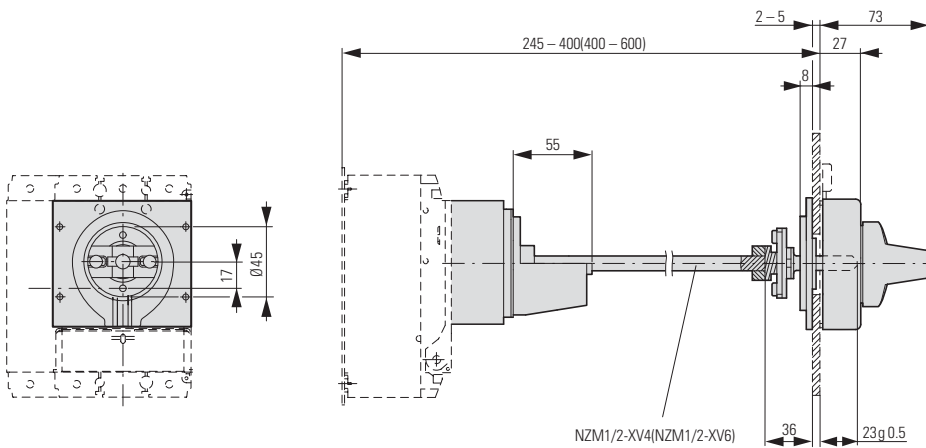

Main switch assembly kit with additional rotary handle

NZM2-XHB-DAIRII-NA)

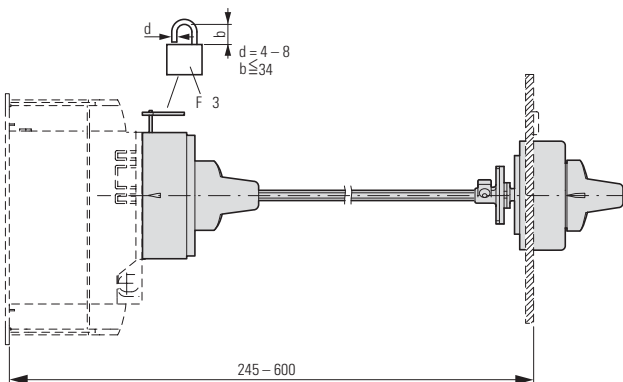


1.9 Circuit-breakers, switch-disconnectors


Construction size 2: accessories

1 NZM2-XTVD..., NZM2-XS...

Door coupling rotary handle with extension shaft NZM2-XTVDIIRI-601-NAI

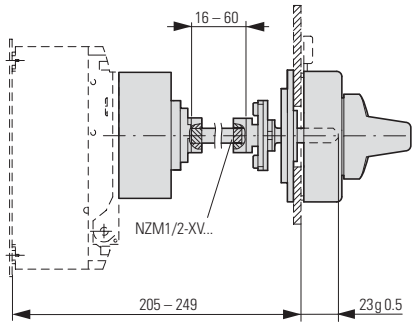


NZM2-XTVDIIRI-0(-NAI)


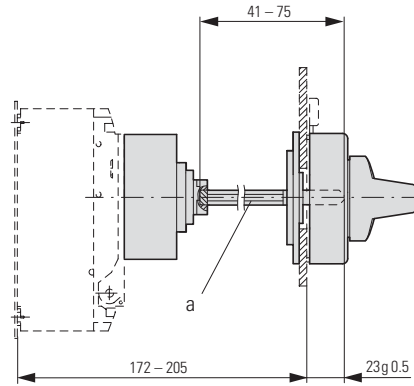


① Special tip



Minimum distance of door coupling rotary handle from door pivot point



Main switch assembly kit for side wall installation NZM2-XSIRI-L

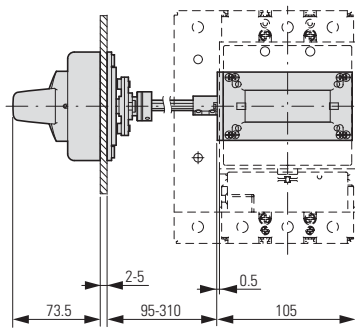


NZM2-XS(R)-R

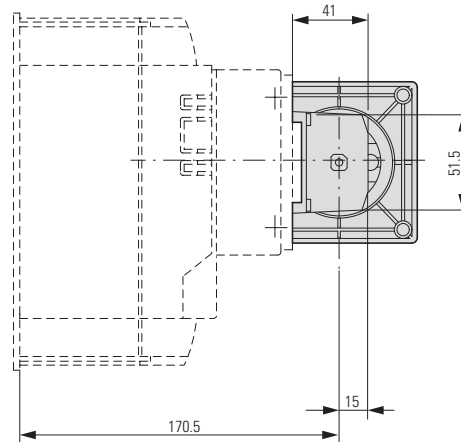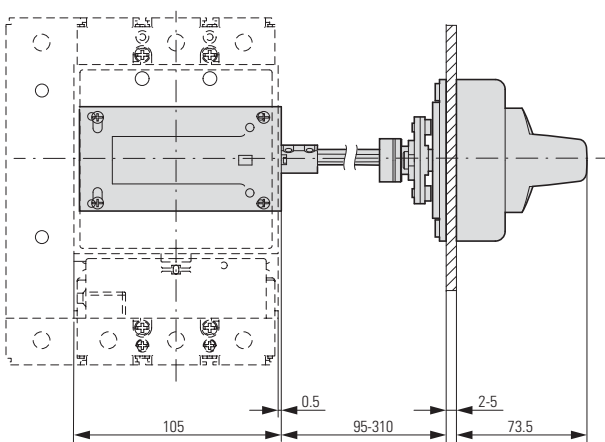


NZM2-XS..., NZM2...-XRAV...

Main switch assembly kit for side wall installation with mounting bracket.

NZM2-XSIRIM-L

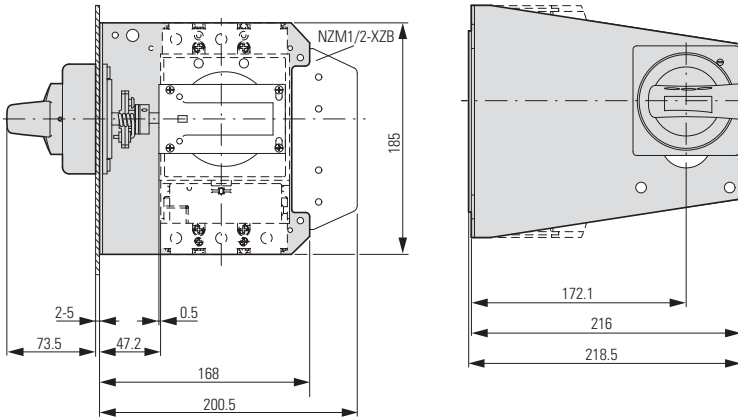


NZM2-XSIRIM-R

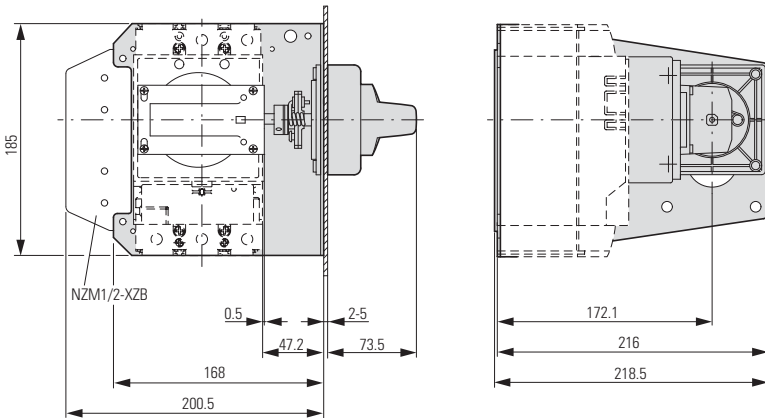

Rear-mounted drives

NZM21-41-XRAVIR)

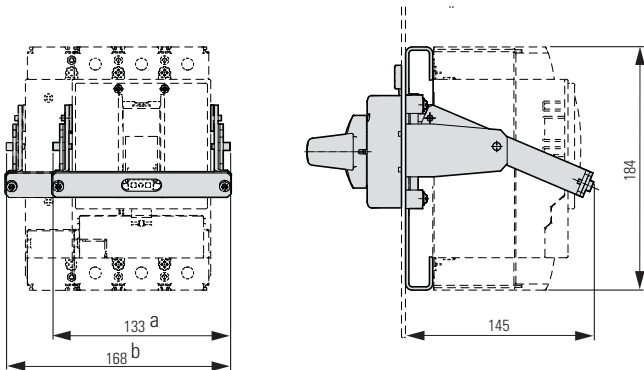

- ① NZM2-XRAV(R)
- ② NZM2-4-XRAV(R)


1.9 Circuit-breakers, switch-disconnectors

Construction size 2: accessories

1 NZM...-XAB, NZM2-XBR, NZM2-XDTV...


Spacers

NZM1/2-XAB

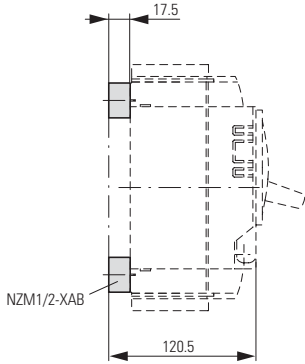


Clip plate

NZM2-XC75

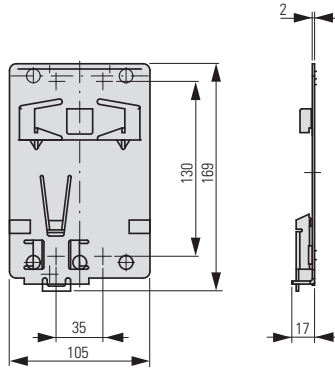


Insulating surround

NZM2-XBR

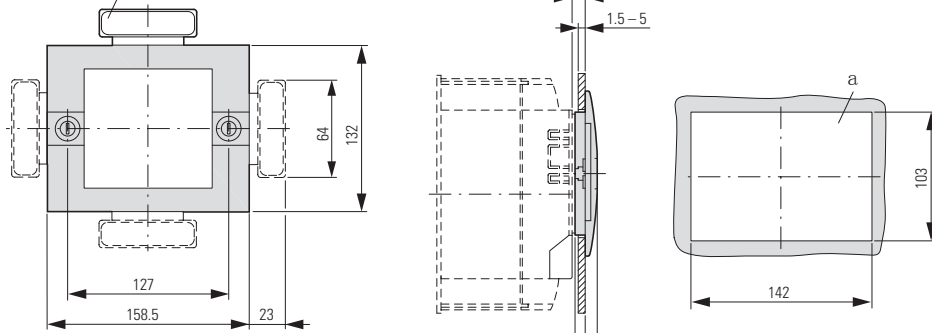

① Mounting aperture


NZM2/3-XBRS

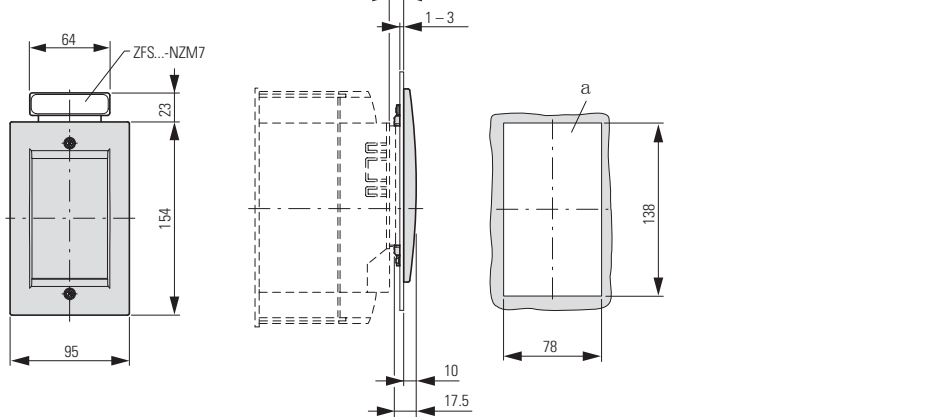

① Mounting aperture

Rotary handle on switch with door interlock


NZM2-XDTV(R)

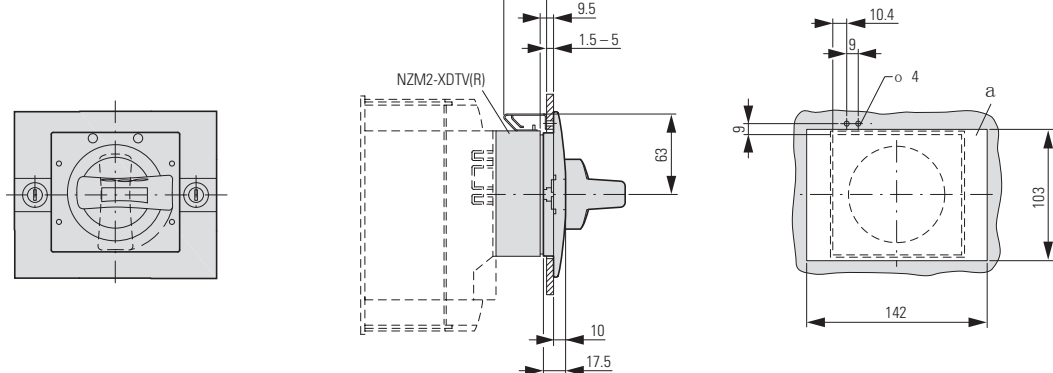

① Mounting aperture



NZM2...-XKAV, NZM2...-XSH

Toggle lever locking device
NZM2/3-XKAV

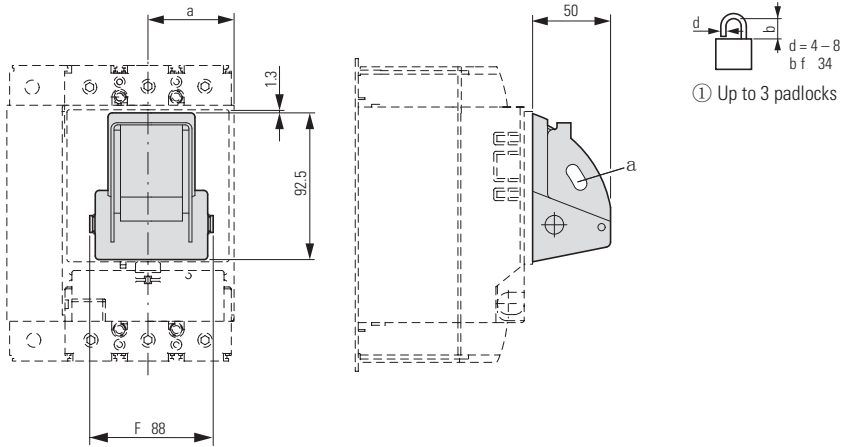

Part no.	a
NZM2, PN2, N2	52.5
NZM3, PN3, N3	70

Side-mounted handle
NZM2...-XS H

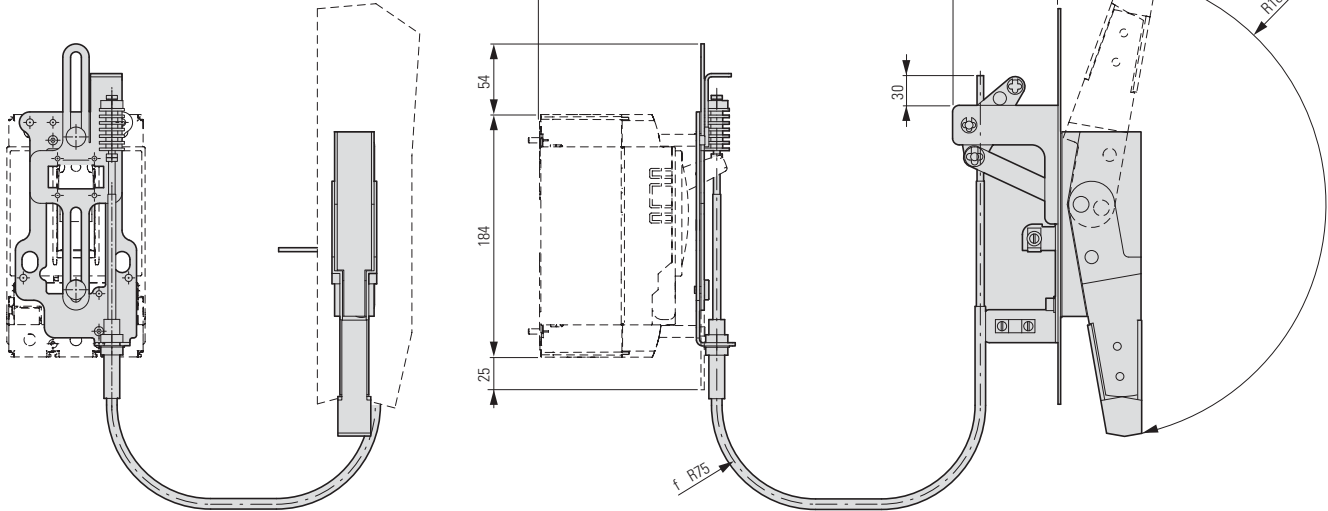

Drilling template


1.9 Circuit-breakers, switch-disconnectors

Construction size 2: accessories


1 NZM2-XMV, NZM2-XTVD..., NZM2-XD

Mechanical interlock


NZM2-XMV+NZM2-XD

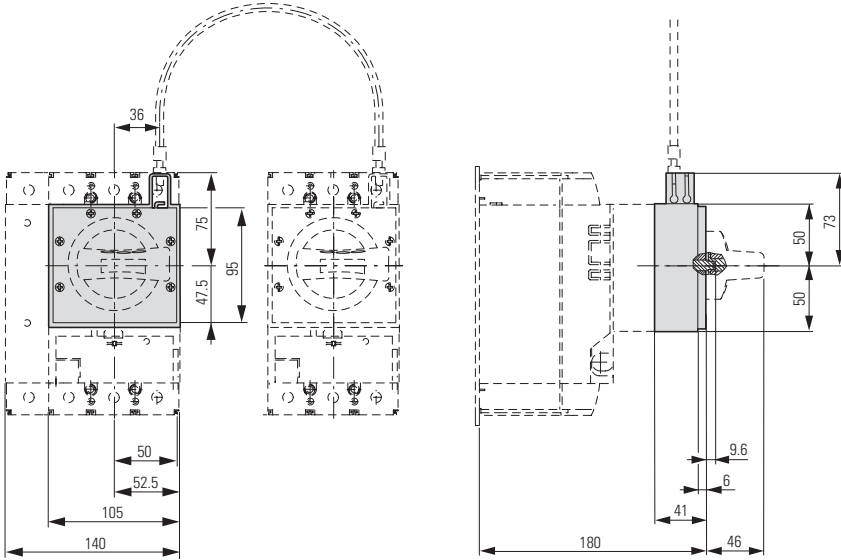


NZM2-XMV+NZM2-XTVDIIR)

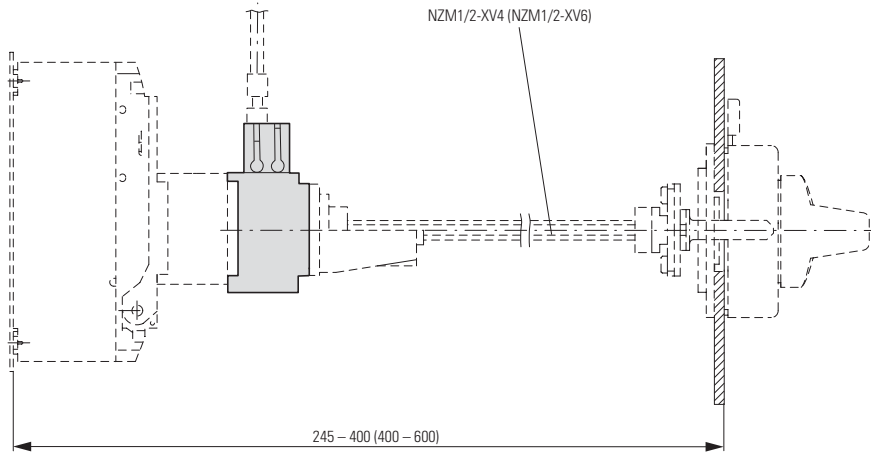

NZM2-XMV+NZM2-XTVDIIRI-60

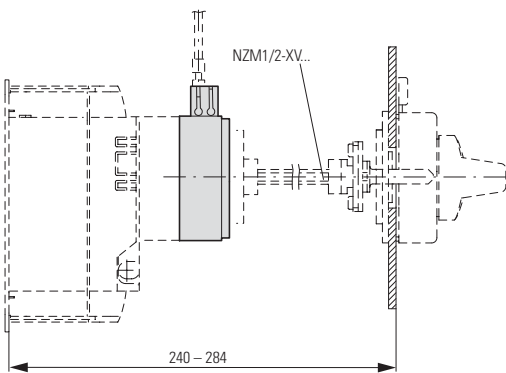

NZM2-XMV+NZM2-XTVIDIIRI-0

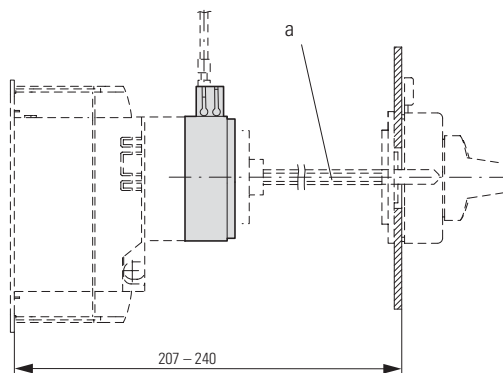


① Special tip

PN2-XPA, NZM2-XR...



Paralleling mechanism

PN2-XPA

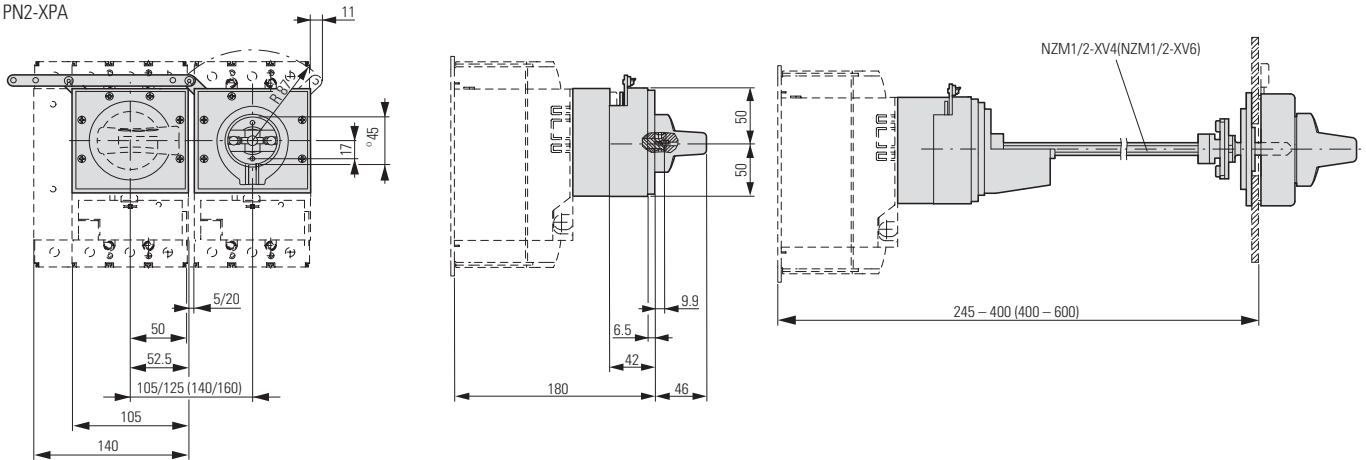


Remote operators



NZM2-XR

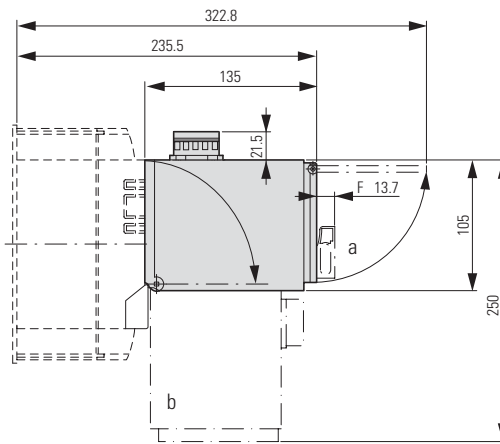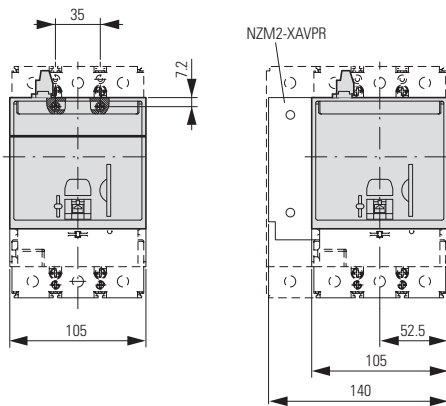

- ① Up to 3 padlocks
- ② Remote operator folded



NZM2-XRD...

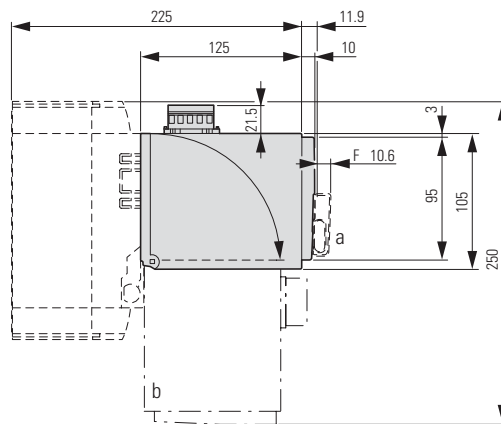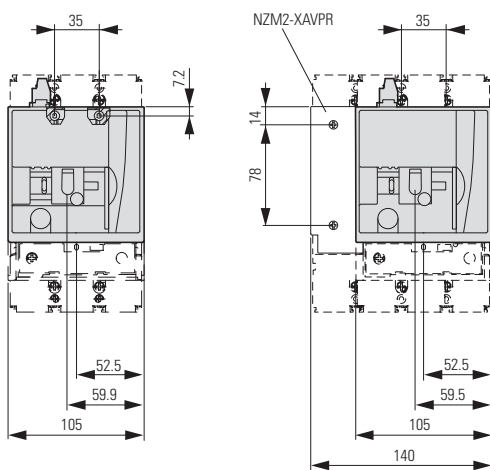

1.9

Circuit-breakers, switch-disconnectors


Construction size 2: accessories

1


NZM2-XCI..., NZM2-XAD, NZM2...-XSVS

Insulated enclosures

NZM2-XC143-T

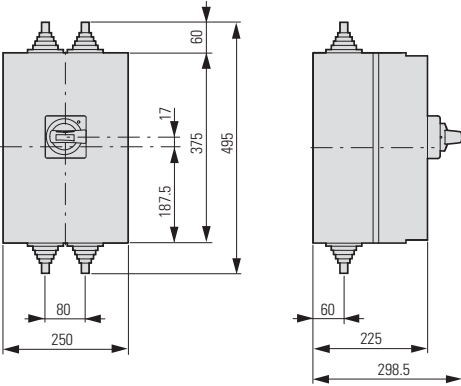


NZM2-XC145-T...

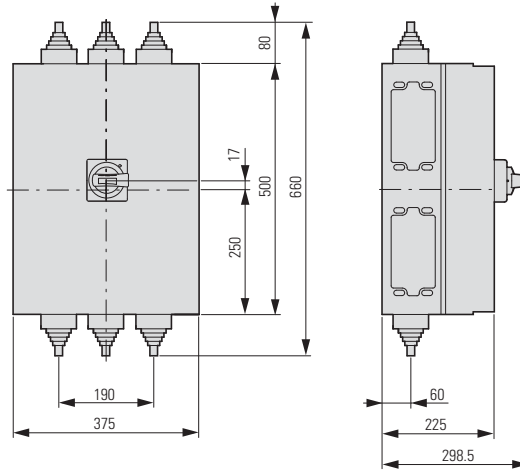

Component adapter

NZM2-XAD250


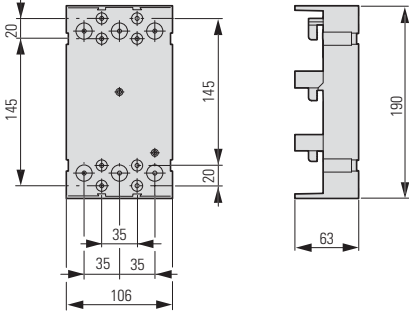


Plug-in units

NZM2...-SVE


N2...-SVE

NZM21-41-XSVS

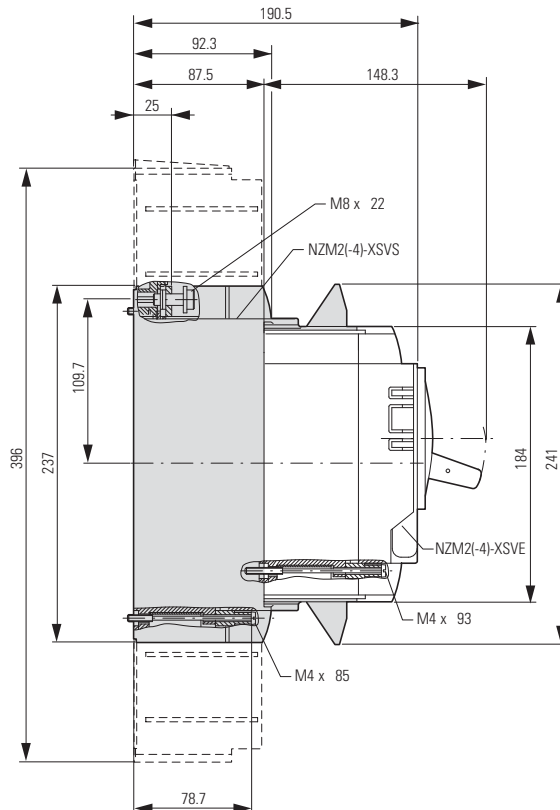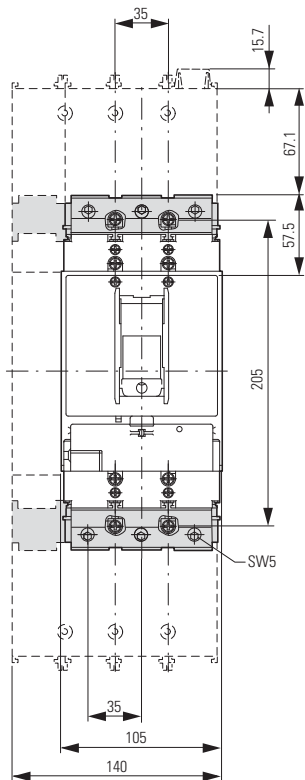


NZM2(-4)-XFI, NZM-XDMI..., UVU-NZM


Earth-fault release
NZM21-41-XFL..

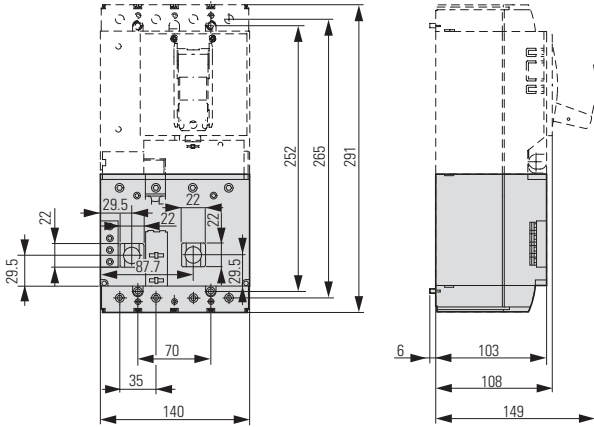


Earth-fault release
NZMH2...-XFIA30

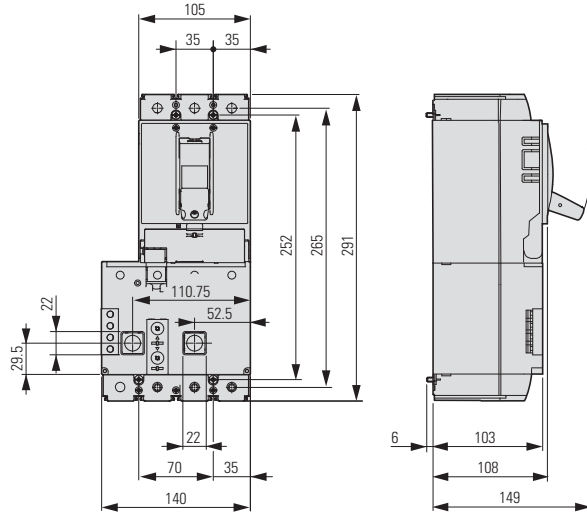


Data management interface (DMI module)
NZM-XDM1612

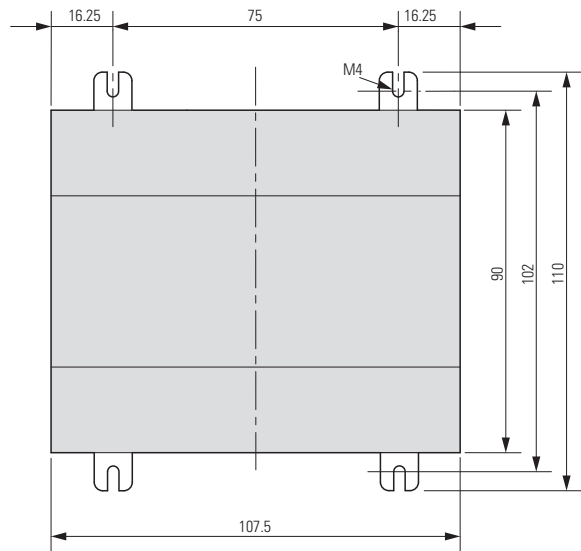

NZM-XDM DPV1
EASY2

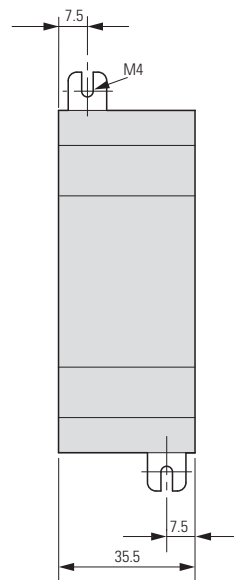


NZM-XDMI
EASY2

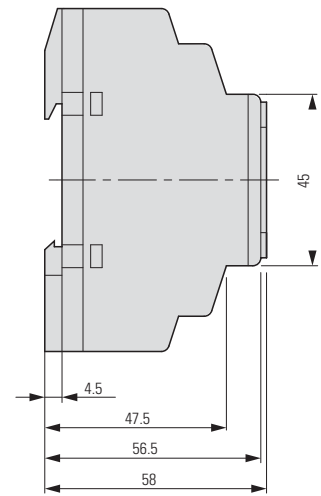

Undervoltage releases, off-delayed

UVU-NZM
Capacitor unit
NZM-XCM

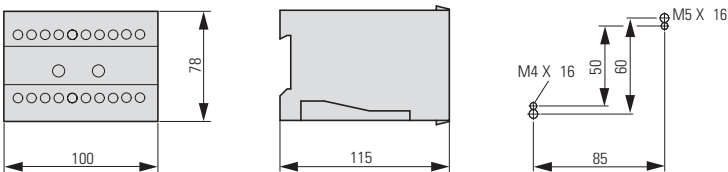




1.9

Circuit-breakers, switch-disconnectors

Construction size 3: basic devices



1 NZM3, PN3, N3, NS3

Circuit-breakers
Switch-disconnectors
3 pole
 NZMC3
 PN3
 N3
 NS3

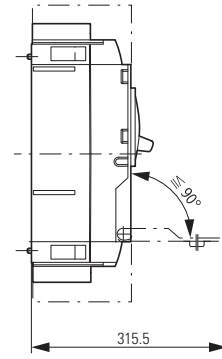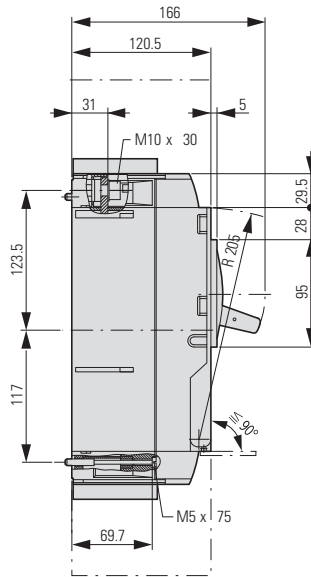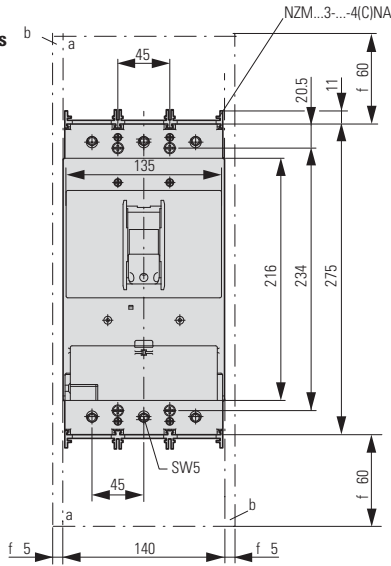


- ① Blow-out area, minimum clearance to other parts $\geq 60\text{mm}$
- ② Minimum clearance to adjacent parts $\geq 5\text{mm}$

Circuit-breakers
Switch-disconnectors
4 pole
 NZMC3-4
 NZMN3-4
 NZMH3-4
 PN3-4
 N 3-4

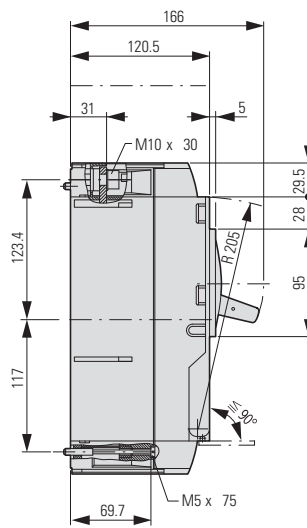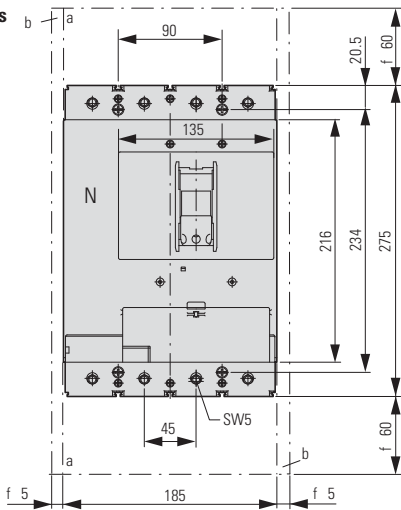

- ① Blow-out area, minimum clearance to other parts $\geq 60\text{mm}$
- ② Minimum clearance to adjacent parts $\geq 5\text{mm}$

Switch-disconnectors
ATEX22-type
3 pole
 PN3.../ATEX22

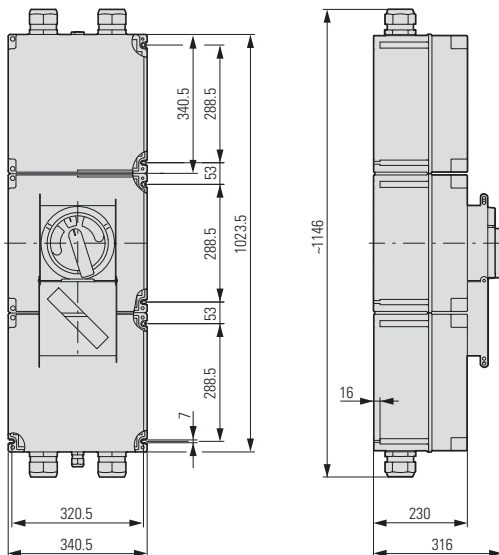


NZM3...-XK, NZM3...-XIP..., NZM3-XST...

Box terminal

(+HNZM31-41-XKCI0IU)


IP2X protection against contact with finger

NZM31-41-XIPK

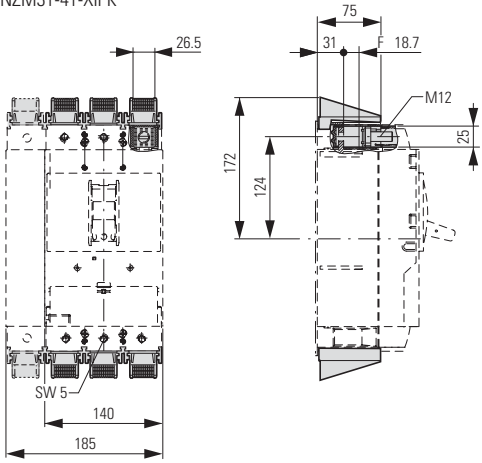

Tunnel terminal

NZM31-41-XKAi (2)

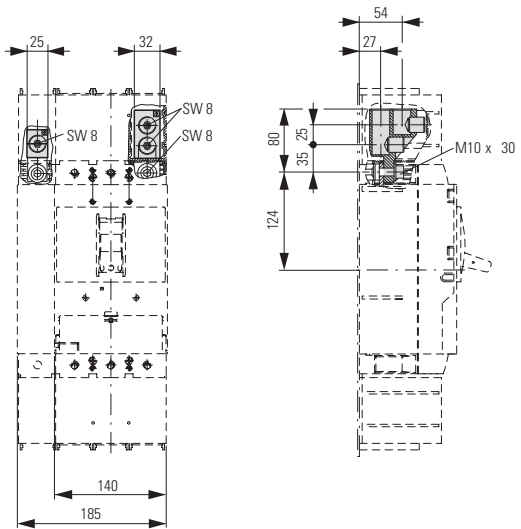

Cover


NZM31-41-XKSA

Cable lug

NZM3-XKS185


IP2X protection against contact with a finger

NZM31-41-XI PA

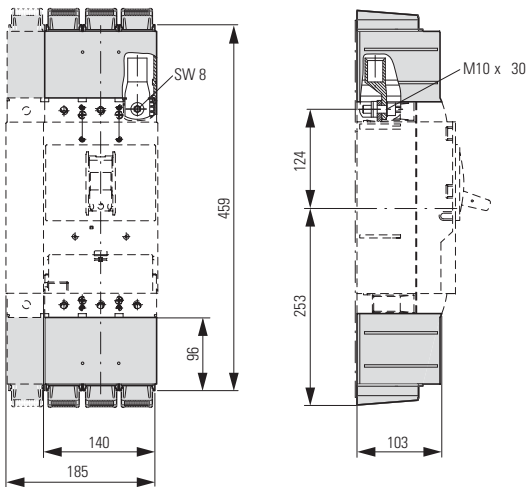

Cable lug cover

NZM3-141-XKSAE

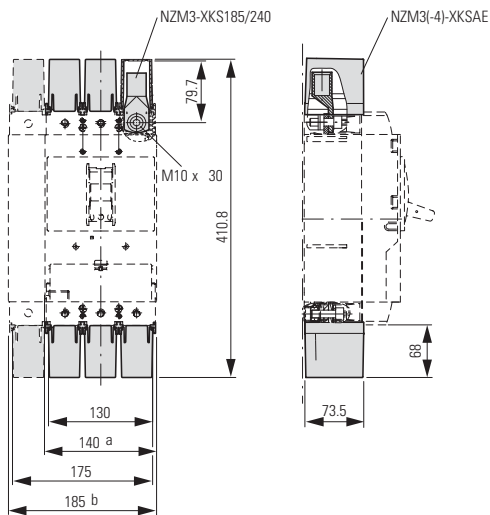

- ① 3 pole
- ② 4 pole

1.9

Circuit-breakers, switch-disconnectors

Construction size 3: accessories

1

NZM3...XK...

Connection width extension


NZM31-41-XKV70

Terminals

NZM31-41-XK22X21

NZM31-41-XK300

Length with phase isolators approx. 599 mm

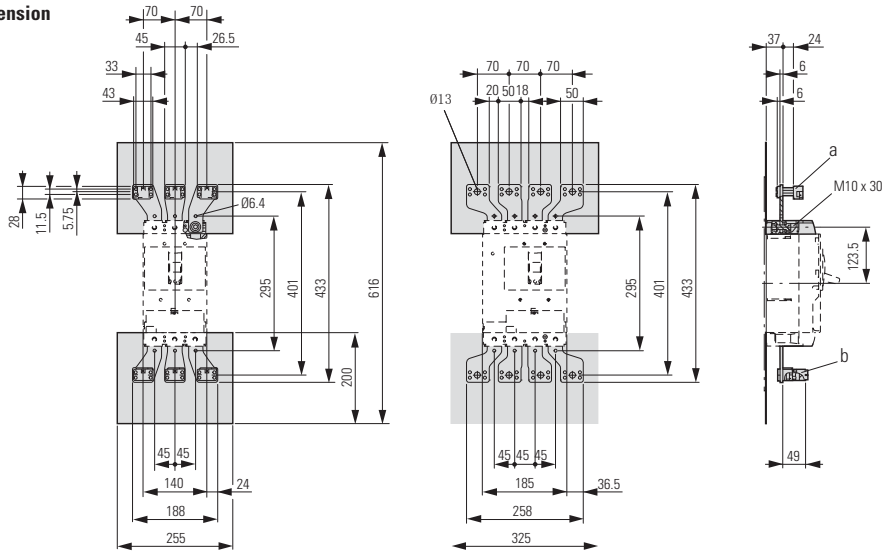


- ① NZM3(-4)-XK22X21
- ② NZM3(-4)-XK300

Connection width extension NZM3-XKV70KB


Connection width extension NZM3-XKV70-2 Cover, large NZM3-XKSAV

Control cable terminals NZM3/4-XSTS NZM-XSTK

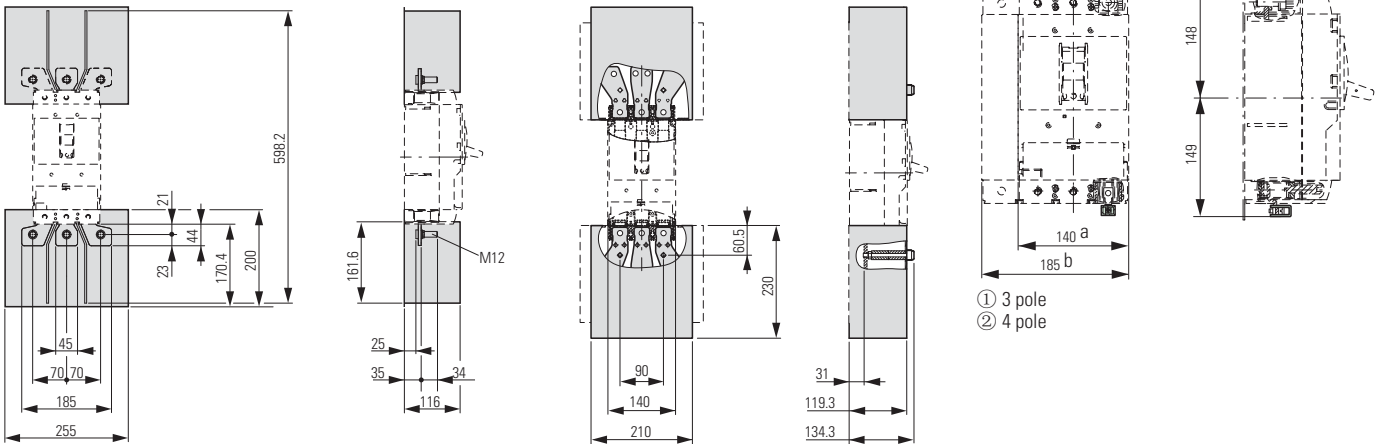


Rear terminal bolts

(+INZM31-41-XKRI0IU)

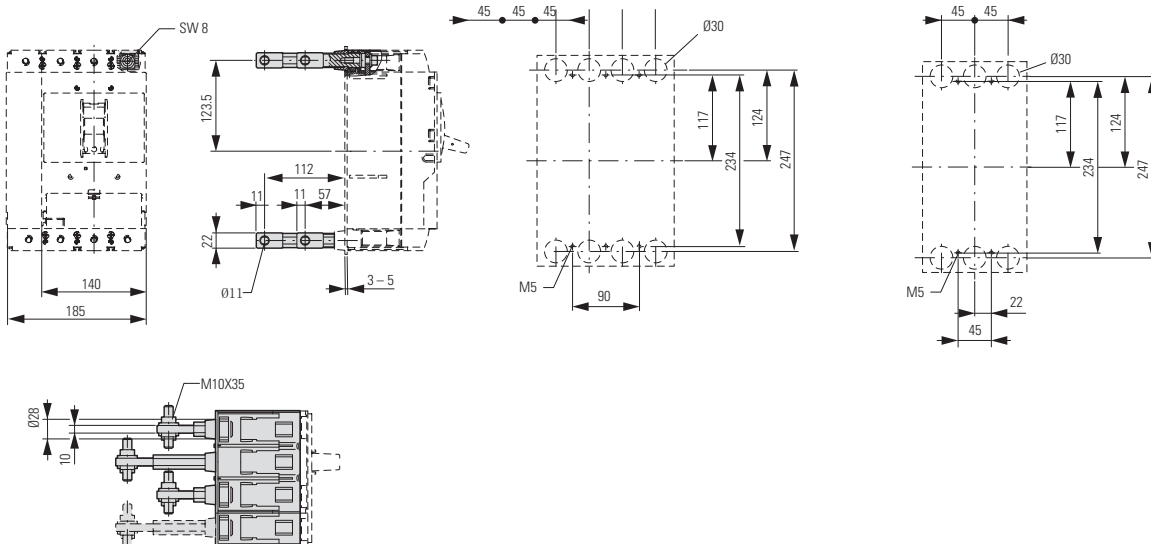


NZM3...-XKP, NZM3-XAB, NZM3-XBR, NZM3-XKV2P


Jumper kit
NZM31-41-XKV2P

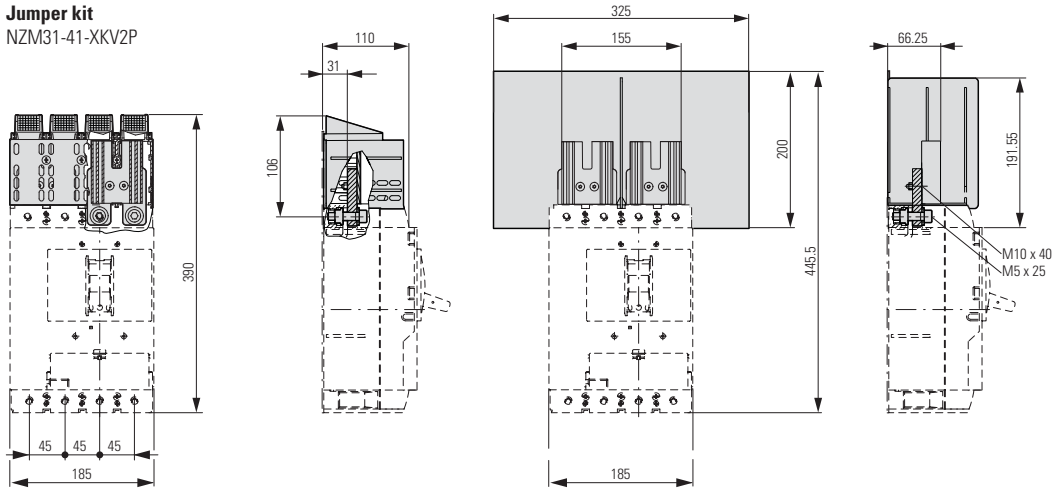

Phase isolators
NZM3-4-XKP

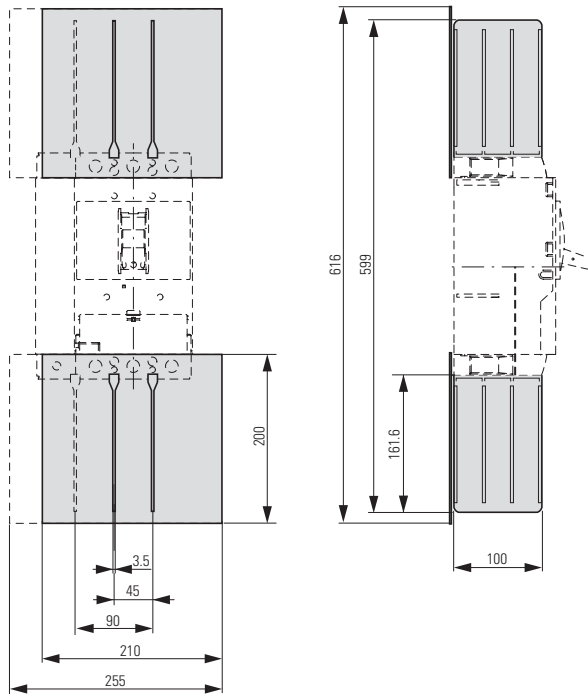

Spacers
NZM3-XAB

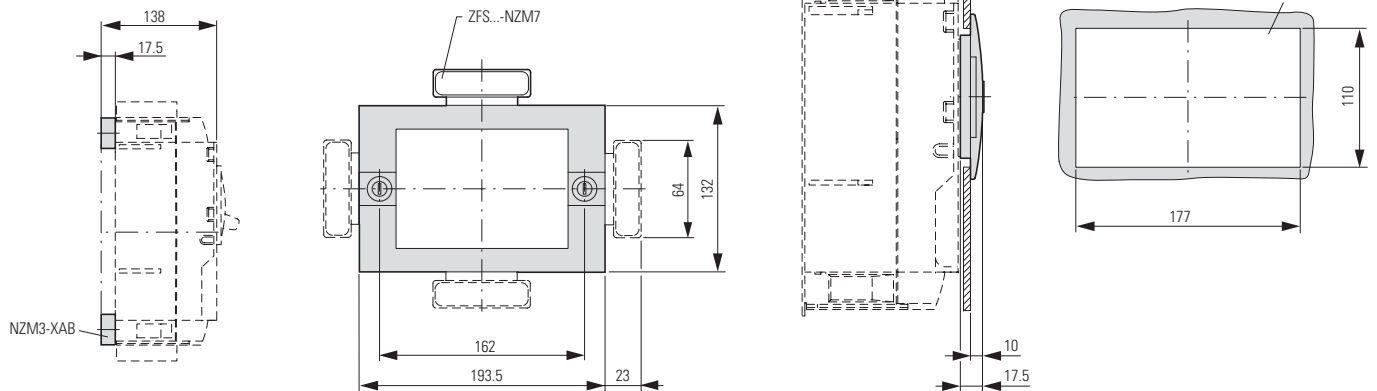

① Mounting aperture

1.9 Circuit-breakers, switch-disconnectors


Construction size 3: accessories

1

NZM3-XDV..., NZM3-XTVD...


Rotary drive

Rotary handle on circuit-breaker

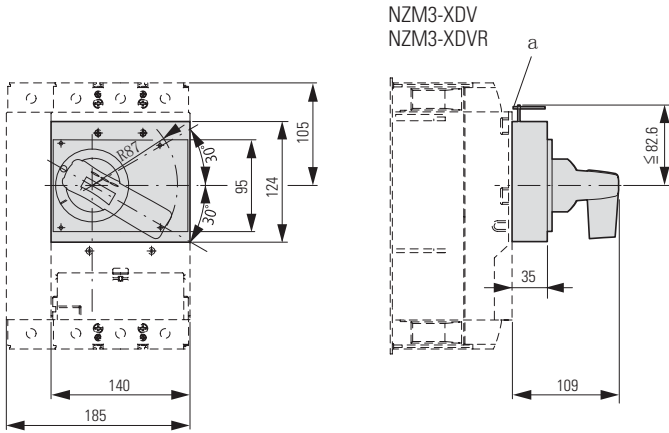

Door coupling rotary handles


NZM3-XTVDIVIIRL..

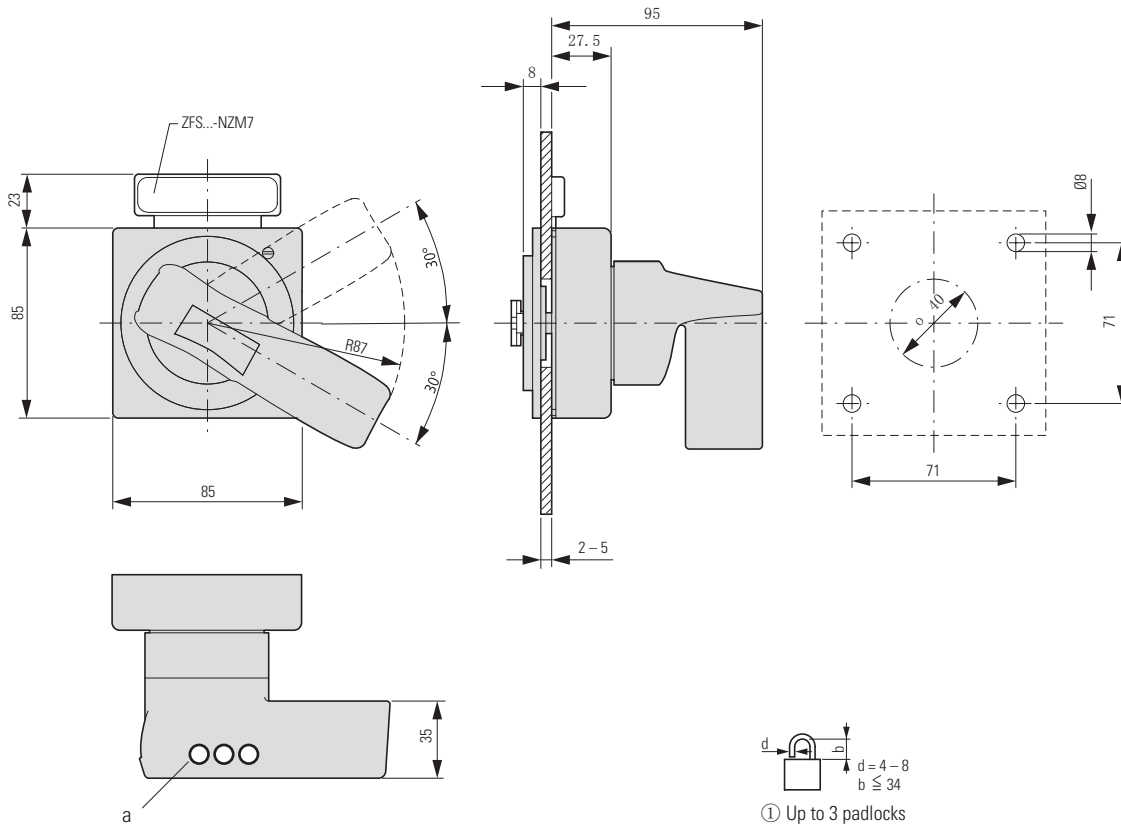

NZM3-XTVD


Door coupling rotary handle with extension shaft

NZM3-XTVDV(R)(-NA)
NZM3/4-XV4(6)

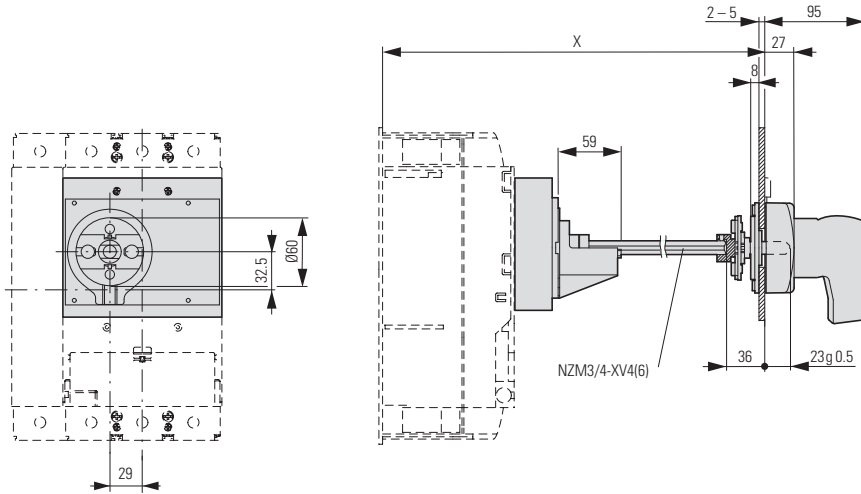


Part no	X
NZM3/4-XV4	270 – 400
NZM3/4-XV6	400 – 600


NZM3-XTVDVIRI-60(-NA)

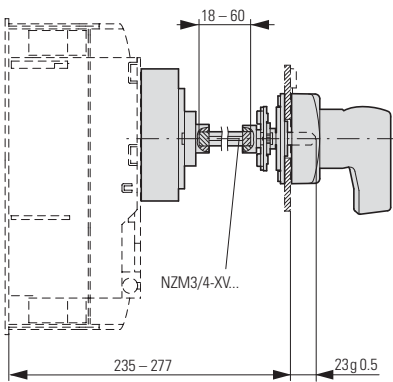

NZM3-XTVDVIRI-0(-NA)

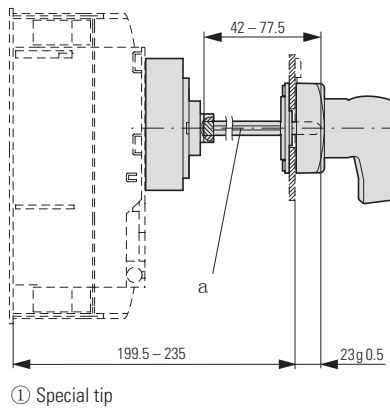

Minimum distance of door coupling rotary handle from door pivot point



1.9

Circuit-breakers, switch-disconnectors


Construction size 3: accessories

1


NZM3-XS..., NZM3

Main switch assembly kit for side wall installation

NZM3-XSIRI-L

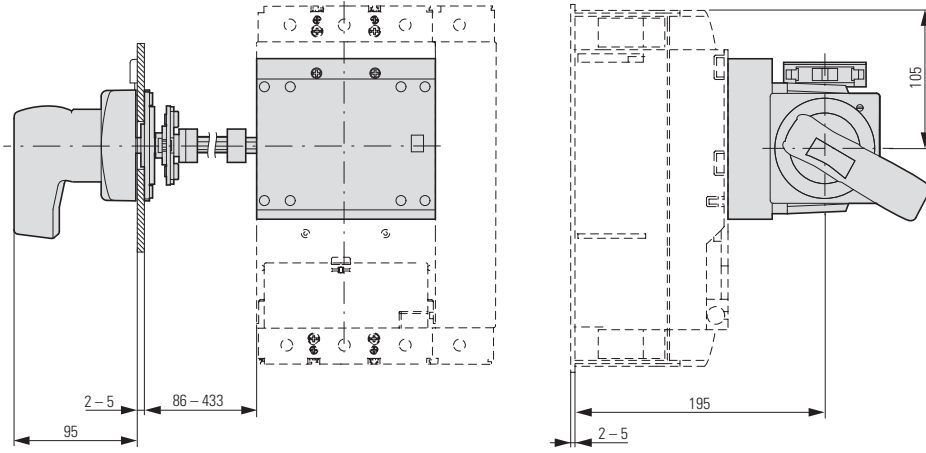


NZM3-XS(R)-R

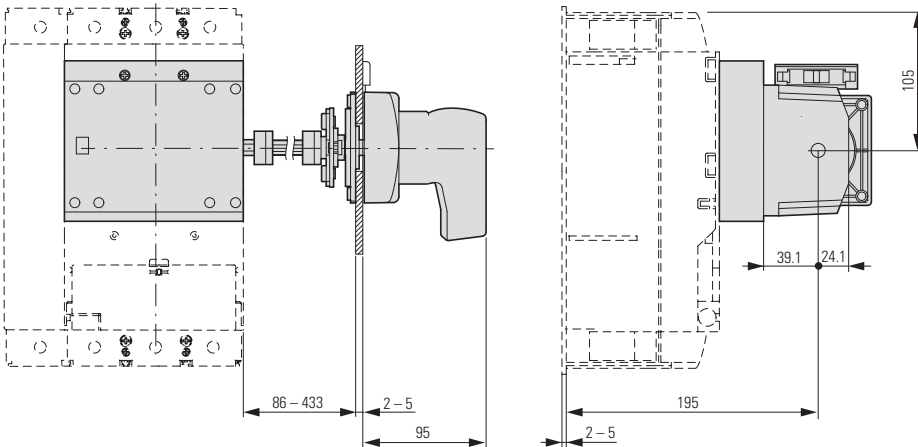


Side-mounted handle

NZM3...XSH

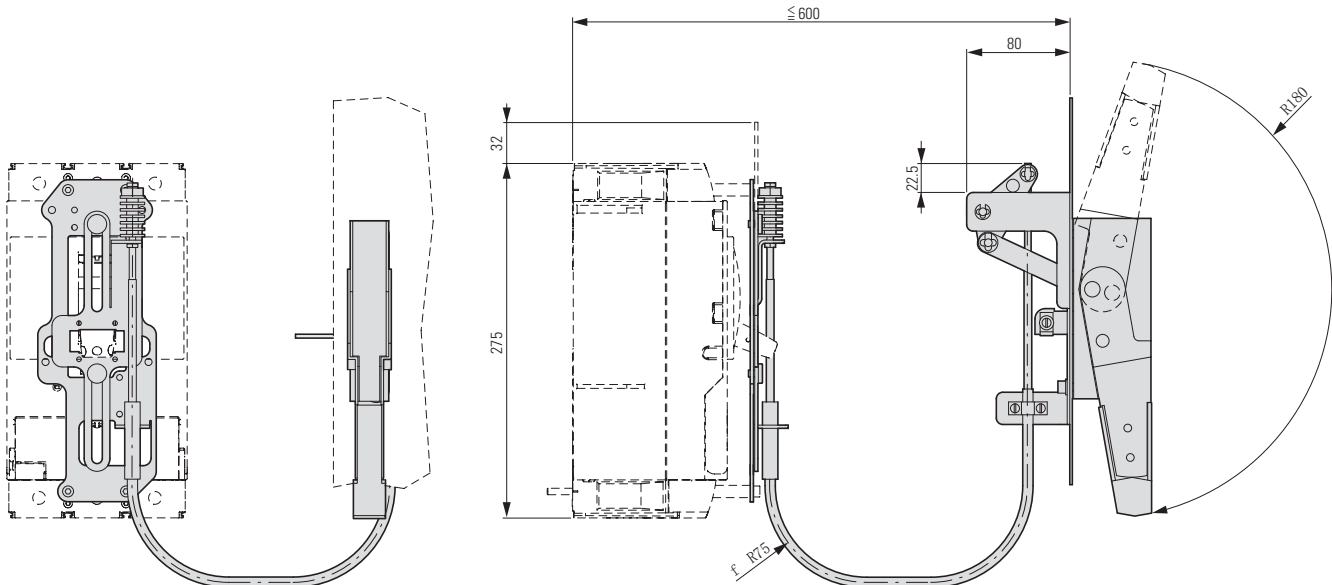


NZM-XMV, NZM3-XTVD..., NZM3-XDV


Mechanical interlock
NZM3-XMV+NZM3-XDV(R)

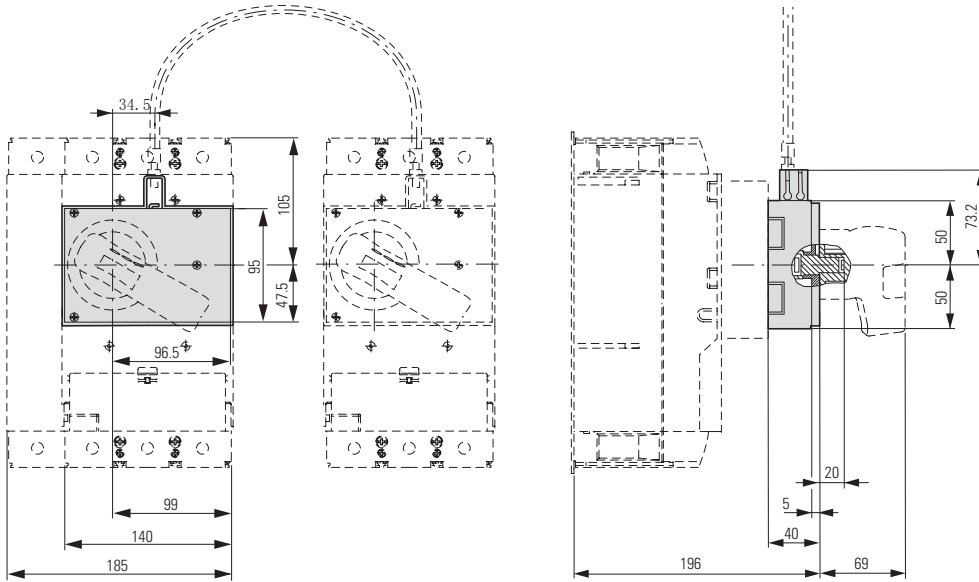


NZM3-XMV+NZM3-XTVDIVIR)

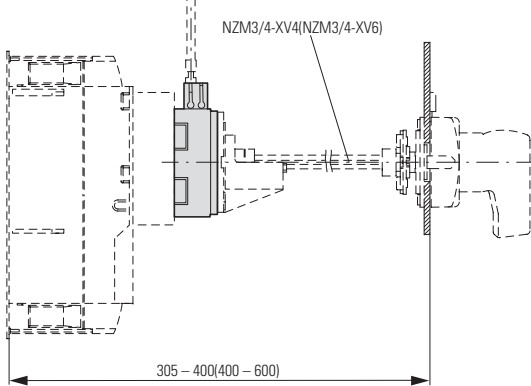

NZM3-XMV+NZM3-XTVDIVIRI-60

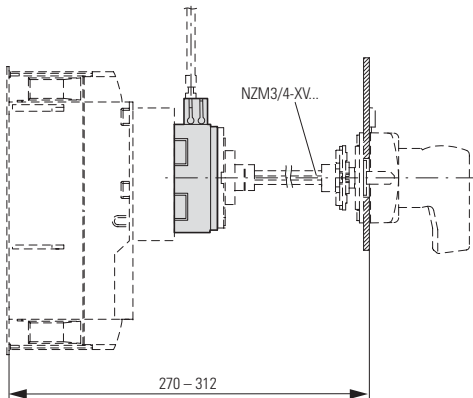

NZM3-XMV+NZM3-XTVDIVIRI-0

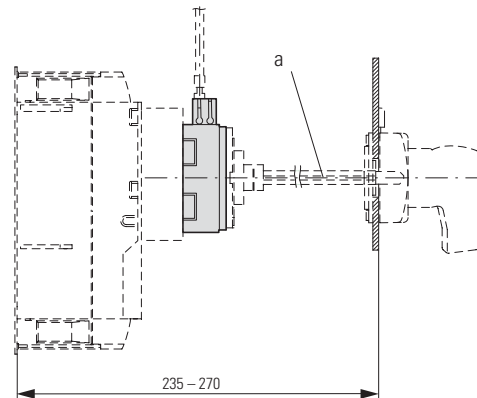

① Special tip

1.9 Circuit-breakers, switch-disconnectors


Construction size 3: accessories

1


NZM3-XMV, NZM3-XTVD..., NZM3-XDV

Paralleling mechanism

PN3-XPA

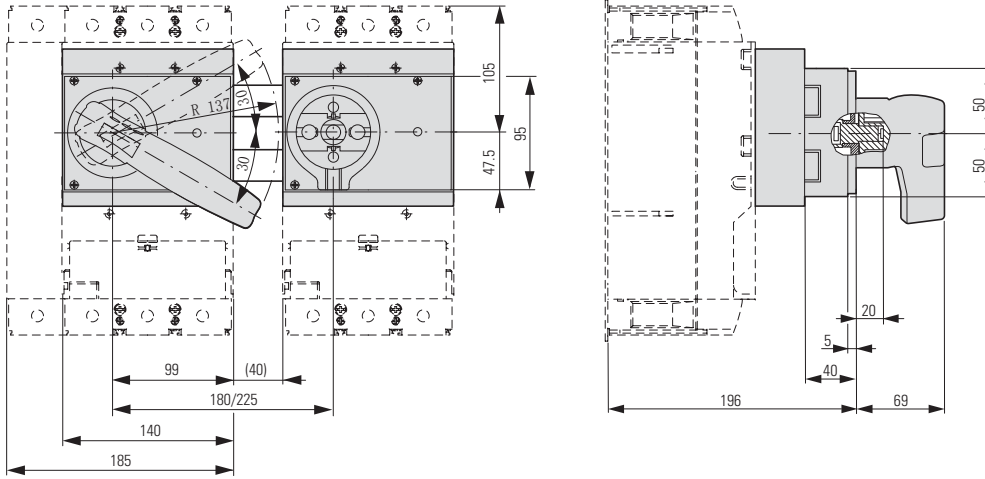


PN3-XPA

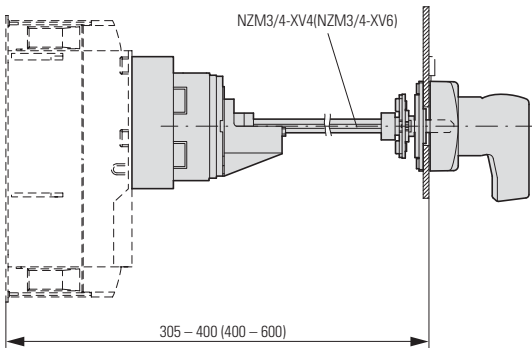


Insulated enclosures

NZM3-XC148-TD

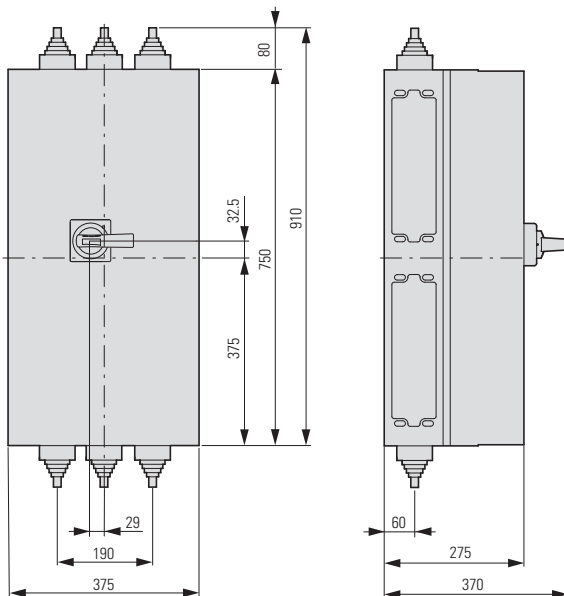

Component adapter




NZM3-XAD550

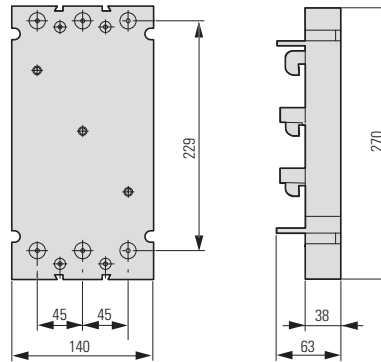

NZM3-X2..., NZM3...XSVS

Remote operators

NZM3-XR

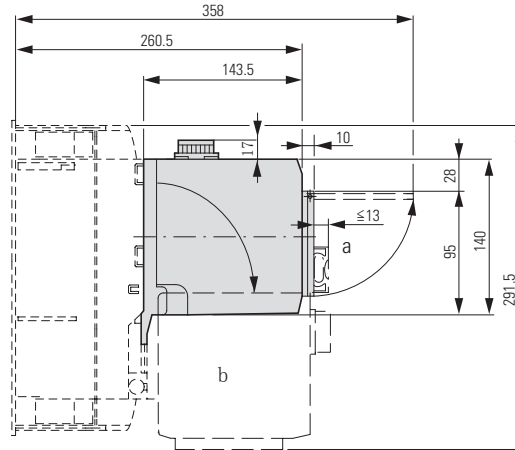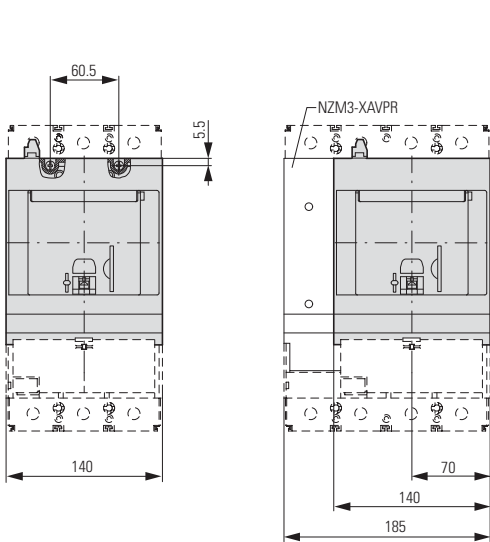




- ① Up to 3 padlocks
- ② Remote operator folded

Withdrawable unit with auxiliary plug-in adapter

NZM3-...-SVE

N3...-SVE

NZM3-XSVS

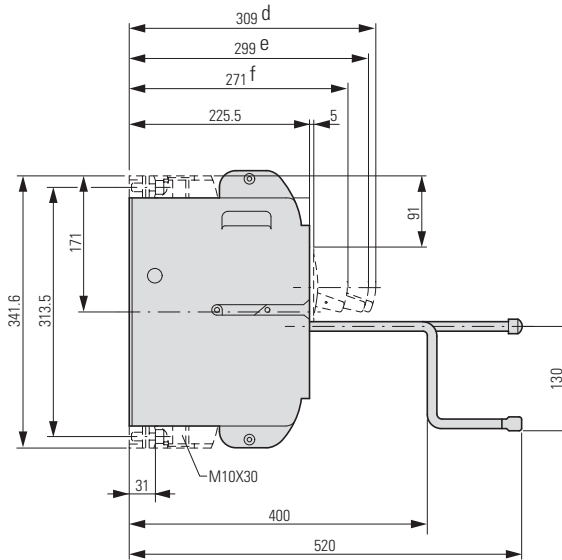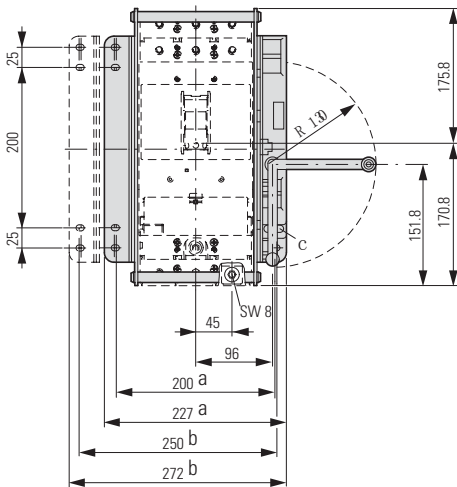

- ③ Up to 3 padlocks
- ④ Disconnected
- ⑤ Test
- ⑥ Connected

1.9

Circuit-breakers, switch-disconnectors

Construction size 4: basic devices


1

NZM, N4, NS4

Circuit-breakers Switch-disconnectors

3 pole


NZMN4
NZMH4
N4
NS4

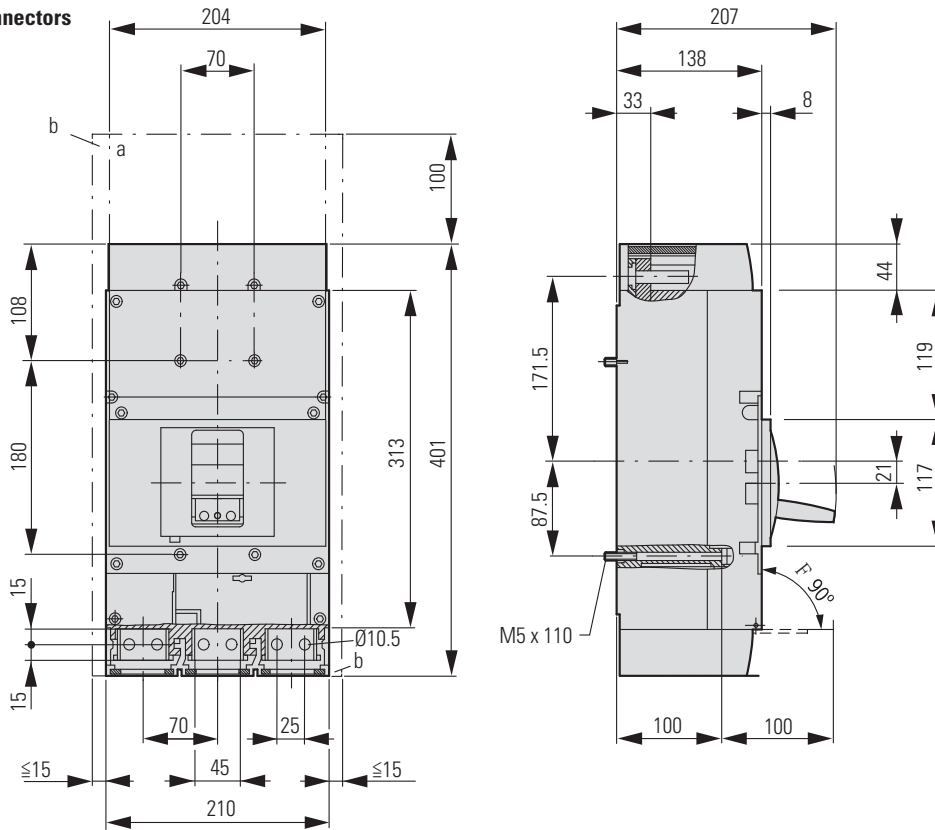

- ① Blow-out area, minimum clearance to other parts ≥ 100 mm up to 690 V; ≥ 200 mm up to 1000 V
- ② Minimum clearance to adjacent parts ≥ 15 mm

4 pole

NZMN4-4
NZMH4-4
N4-4

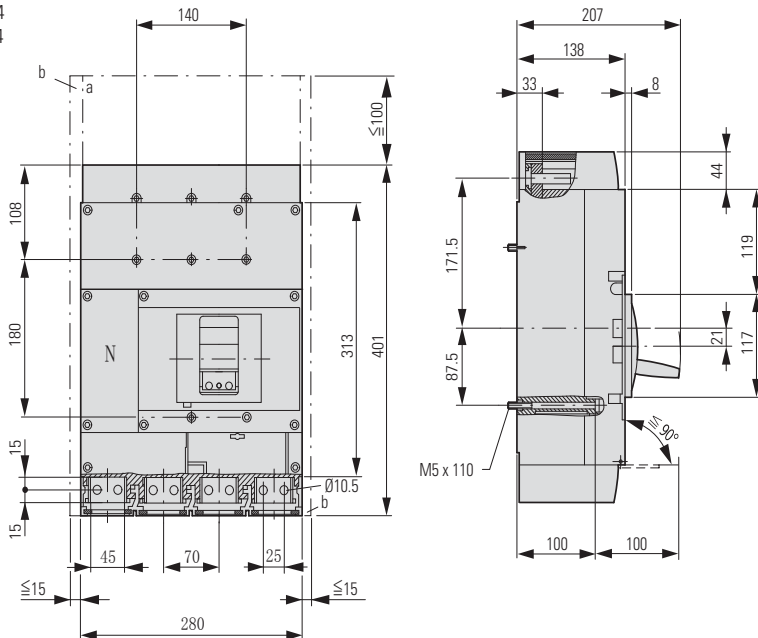


- ① Blow-out area, minimum clearance to other parts ≥ 100 mm
- ② Minimum clearance to adjacent parts ≥ 15 mm

NZM4...-XK


Covers

NZM41-41-XKSA

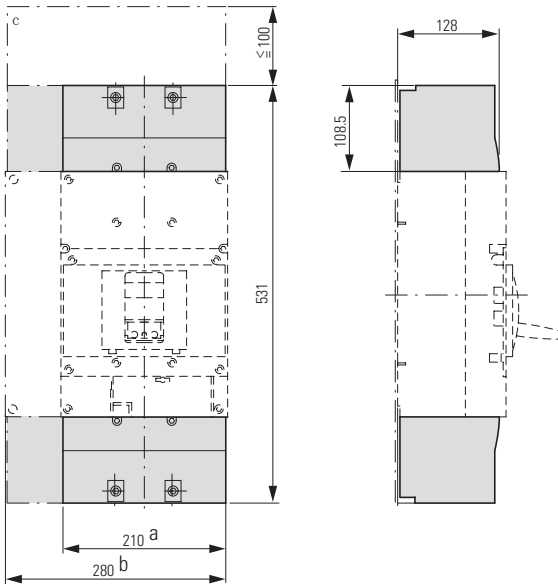

Tunnel terminal

NZM4-4-XKA

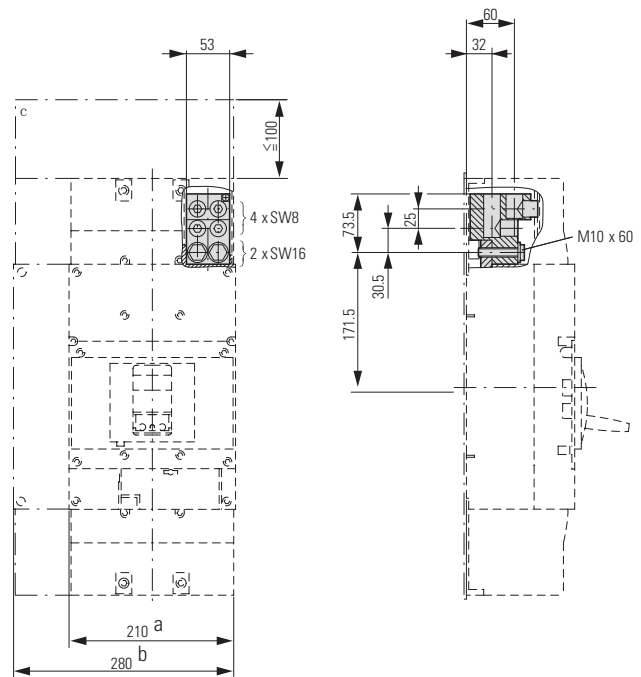

- ① 3 pole
- ② 4 pole
- ③ Clearance from conductive parts ≥ 100 mm up to 690 V; ≥ 200 mm up to 1000 V

Screw terminals

Module plate

1-hole


NZM41-41-XK M 1

2-hole

NZM41-41-XKM2

Flat cable terminal

NZM41-41-XKB

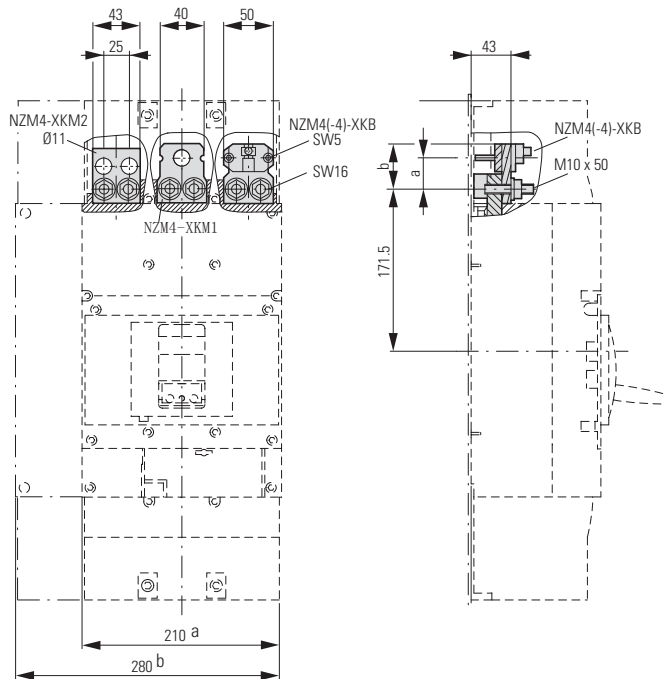

Part no.	a	b
NZM4(-4)-XKM1	36	47
NZM4(-4)-XKM2	32	40
NZM4(-4)-XKB	—	47

- ① 3 pole
- ② 4 pole
- ③ Clearance from conductive parts ≥ 100 mm up to 690 V; ≥ 200 mm up to 1000 V

1.9

Circuit-breakers, switch-disconnectors

Construction size 4: accessories


1

NZM4...-XKM, XKV

Module plate

2 hole, vertical

NZM41-41-XKM2S

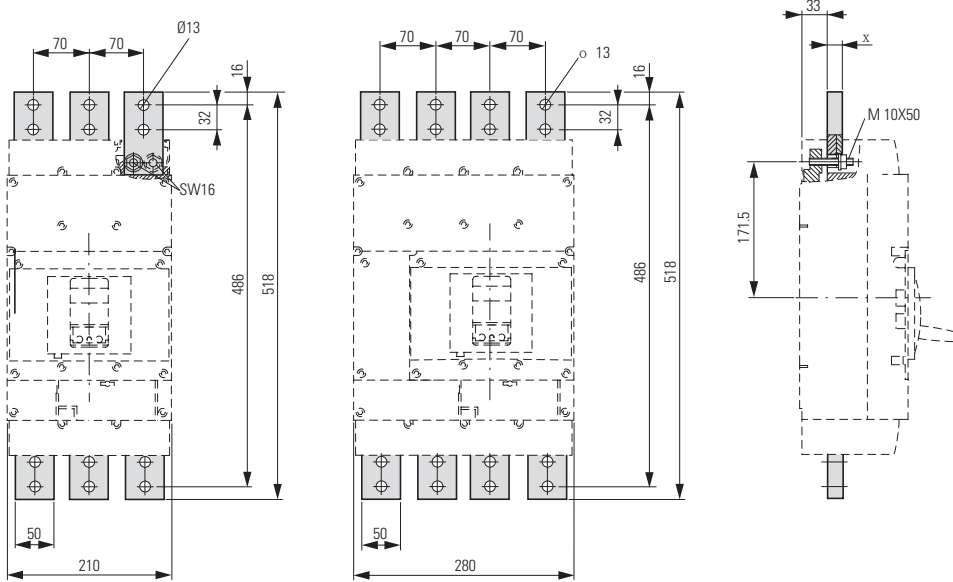

Part no.	X
NZM4(-4)-XKM2S-1250	12
NZM4(-4)-XKM2S-1600	20

Connection width extension

NZM4-XKV95


NZM4-XKV110

Insulation plate

NZM4-XISP


Phase isolators

NZM4-XKP

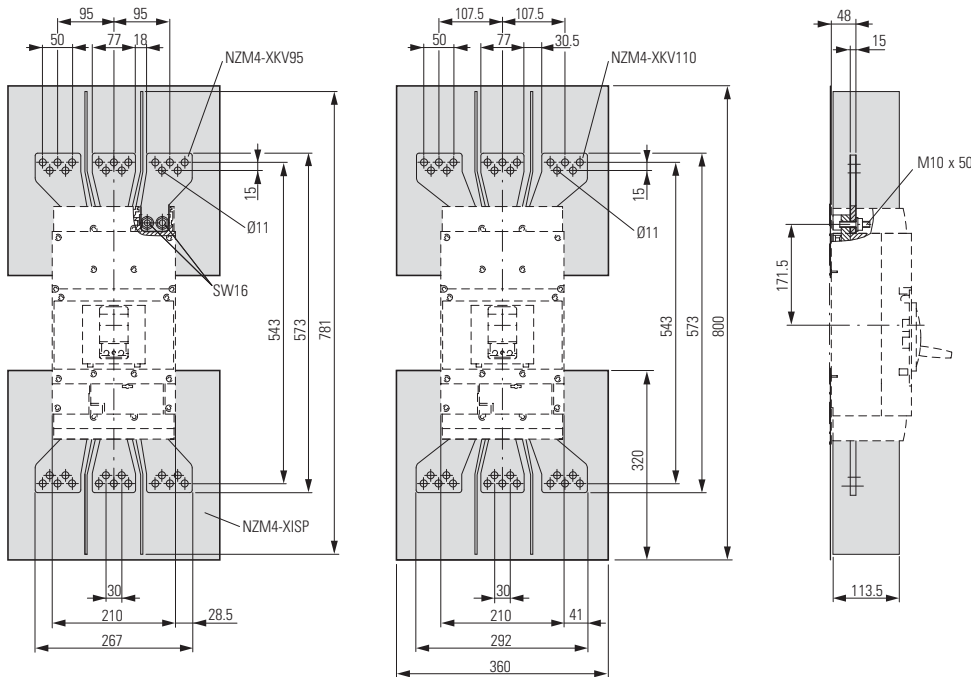


NZM4...-XKV


NZM4-4-XKV95

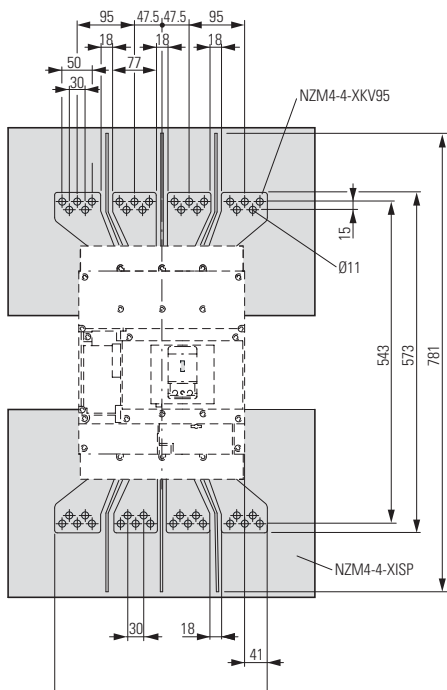

NZM4-4-XKV120

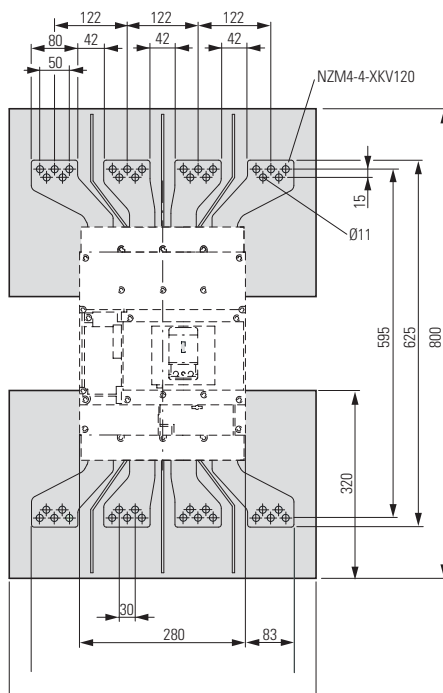


NZM4-4-XISP
NZM4-4-XKP

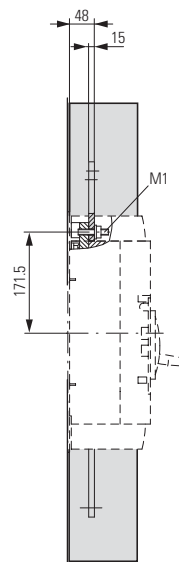


Connection width extension

NZM4-XKV95-2KB

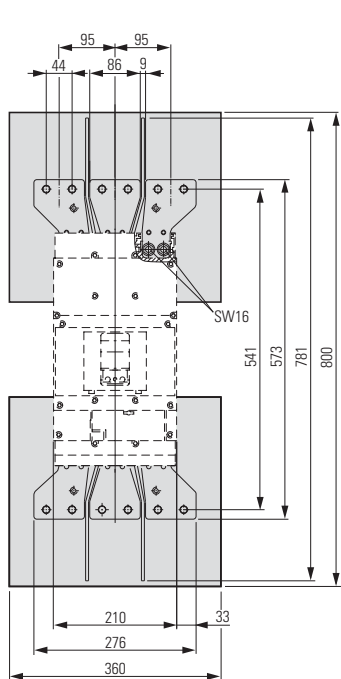

Cover, large

NZM4-XKSAV

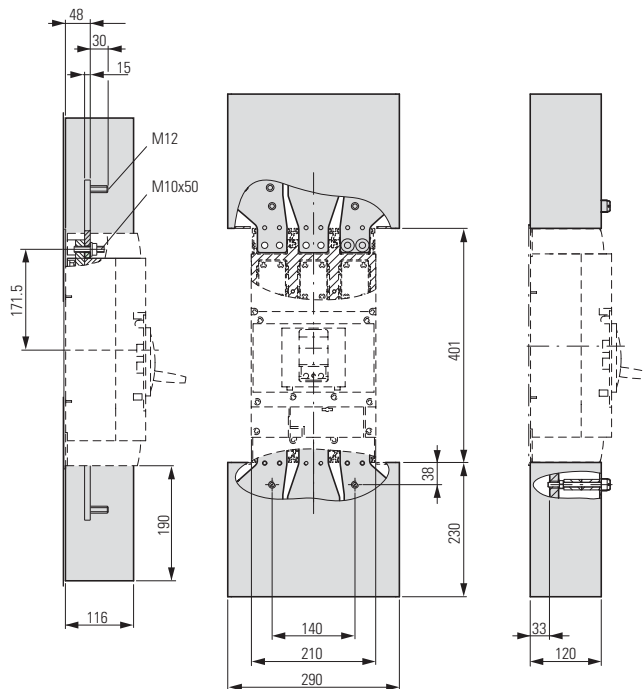


1.9 Circuit-breakers, switch-disconnectors

Construction size 4: accessories


1

NZM4(-4)-XKP, NZM4(-4)-XKR



NZM4-4-XKV95

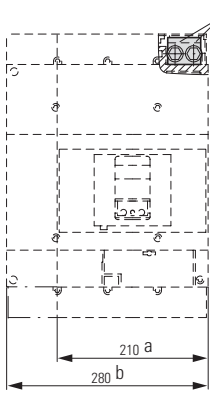


NZM4-4-XKV120

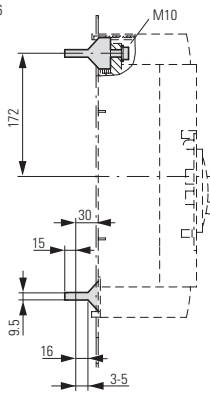


NZM4-4-XISP
NZM4-4-XKP

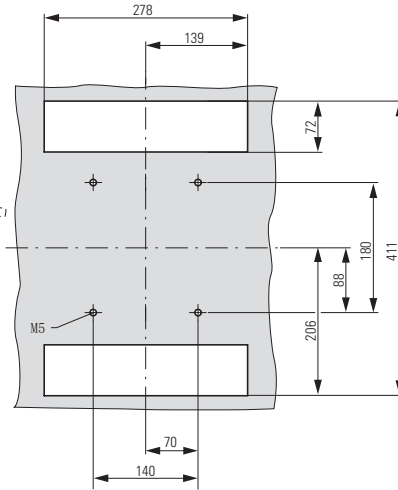



Rear connection possible also rotated by 90°.
① 3 pole
② 4 pole

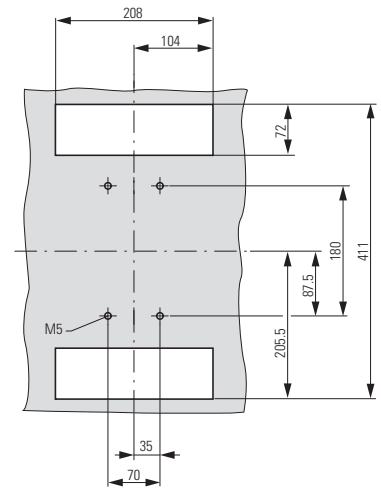

Connection width extension
NZM4-XKV95-2KB

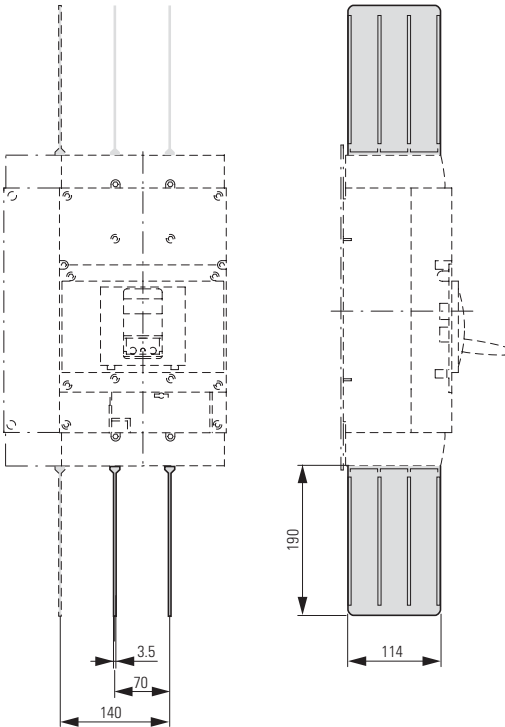







Cover, large
NZM4-XKSAV

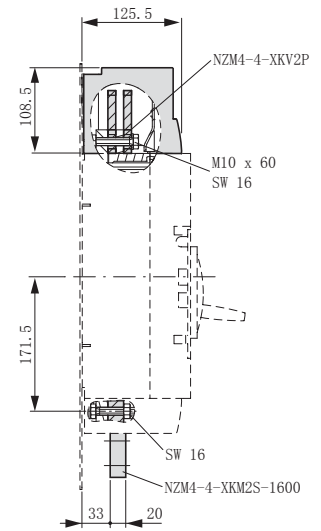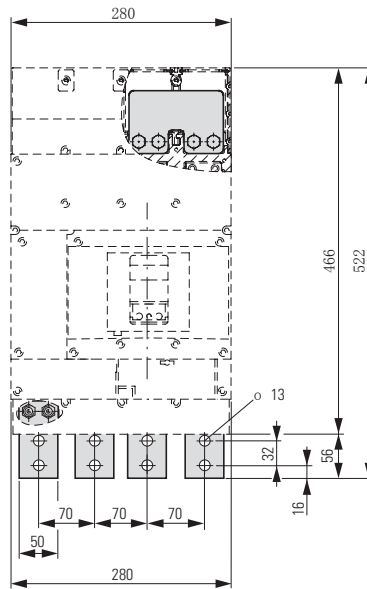


NZM4-XAS..., NZM12

Jumper kit

NZM4-4-XKV2P-1400

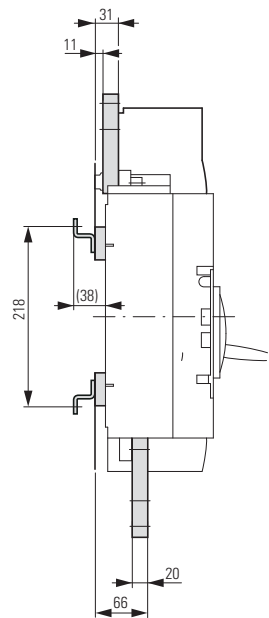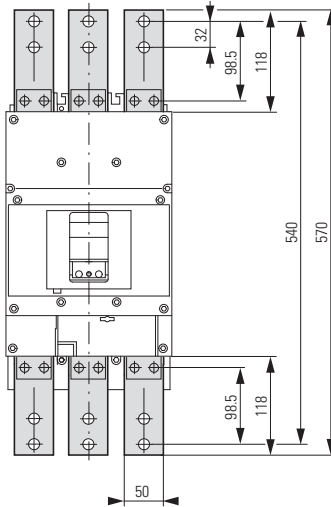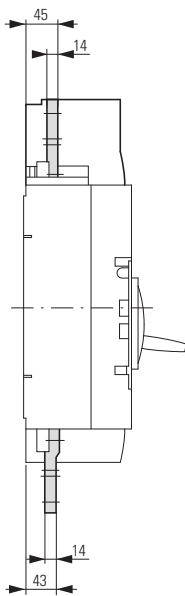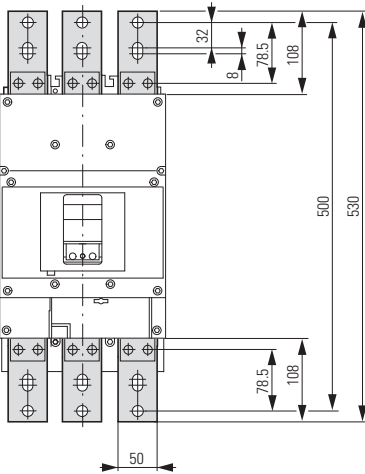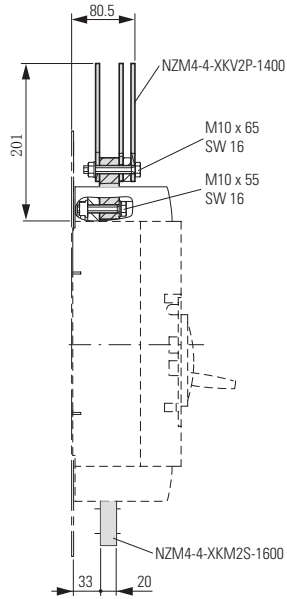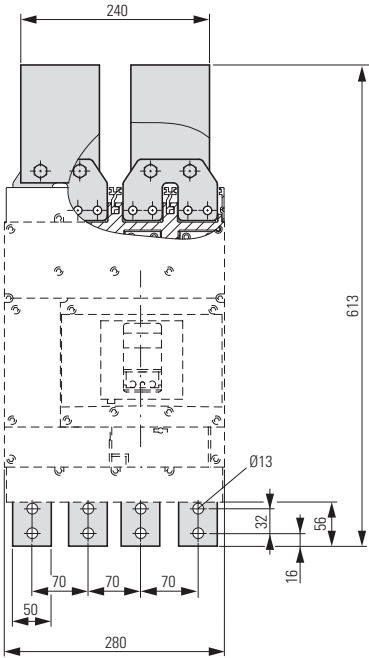

Drilling template NZM12-1000 (1250) conversion to NZM4

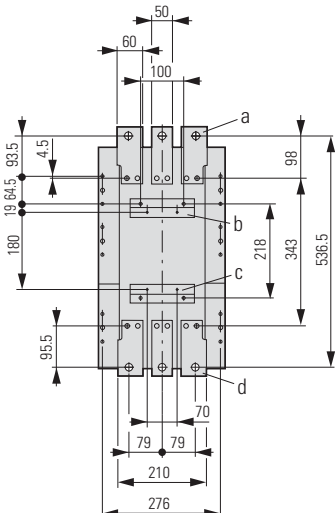

- ① Module plate NZM4-XAS12-1000(1250)
- ② Holes for mounting bracket NZM4-XAS12(M5)
- ③ Mounting bracket NZM4-XAS12
- ④ Mounting rail NZM12

1.9


Dimensions

Construction size 4: NZM12 replacement


1

NZM12, NZM4-XAS...

Replacement of NZM12-1000(1250) with NZM4 with module plate,
fixed mounting on mounting plate
NZM4-XAS12-1000(1250)

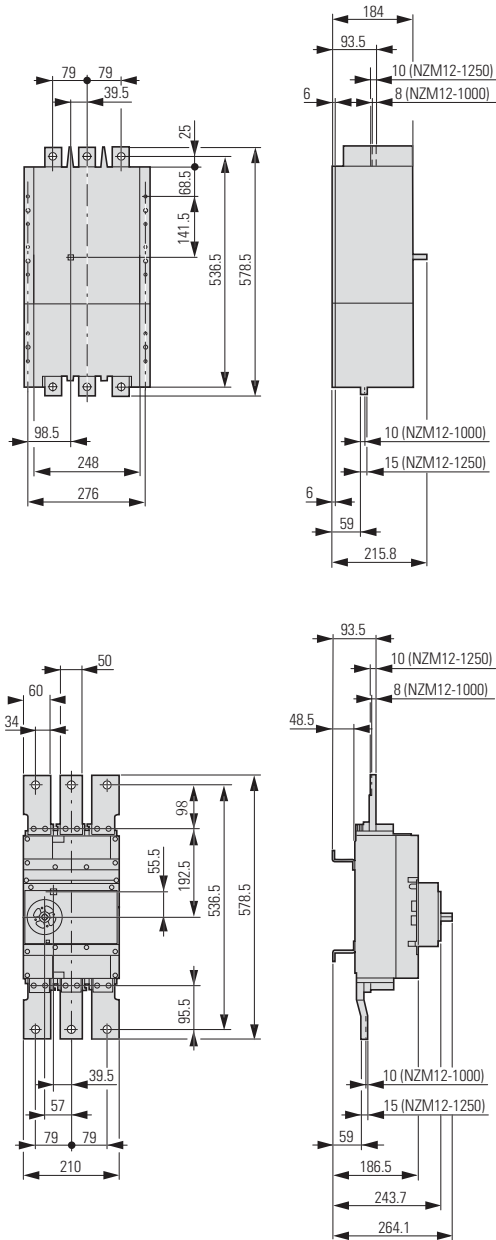


Replacement of NZM12-1600 with NZM4 with module plate,
fixed mounting on mounting plate
NZM4-XAS12-1600

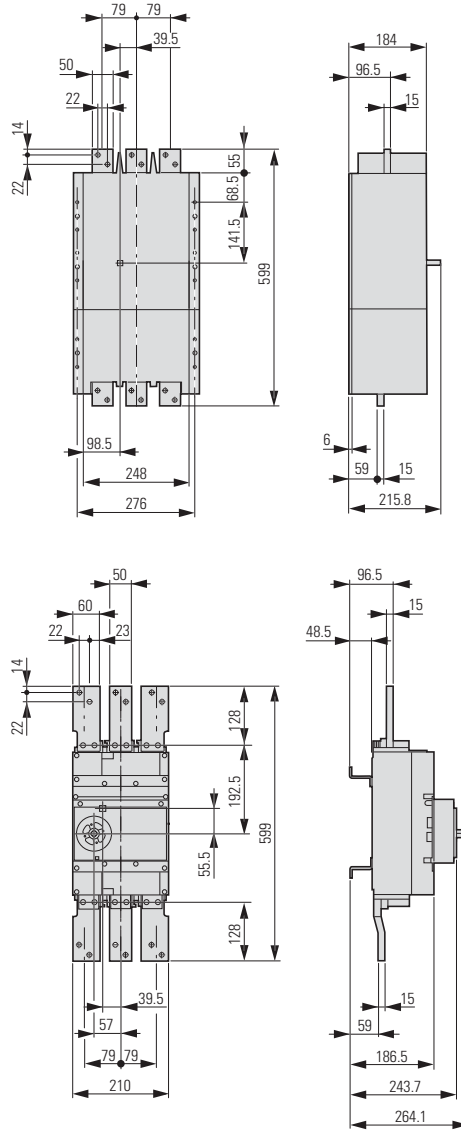


N4-XAS-12

Replacement of N12-1000(1250) with N4 with module plate,
fixed mounting on mounting plate
N4-XAS12-1000(1250)

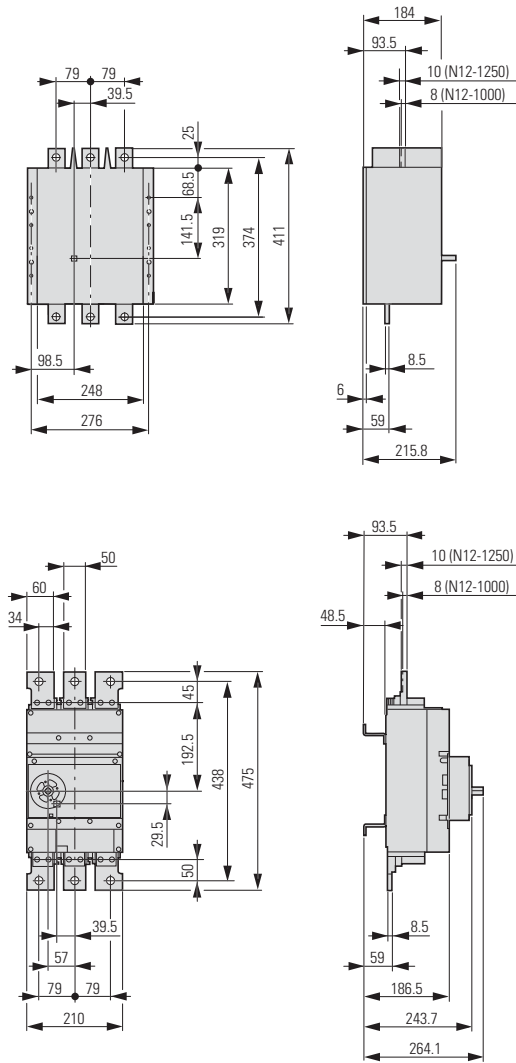

Replacement of N12-1600 with N4 with module plate,
fixed mounting on mounting plate
N4-XAS12-1600

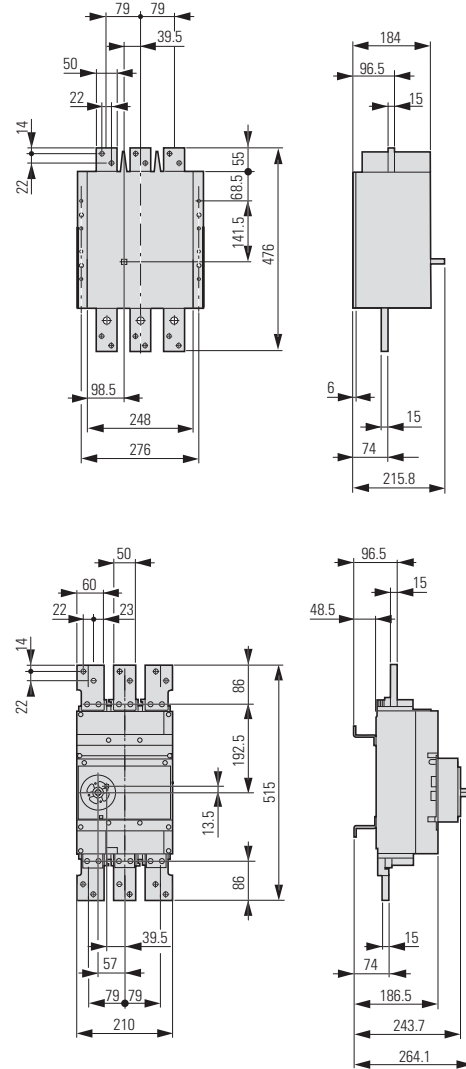



1.9 Circuit-breakers, switch-disconnectors

Construction size 4: accessories

1




NZM4-XDV..., NZM4-XTVD...

Rotary handle on circuit-breaker NZM4-XDV(R)

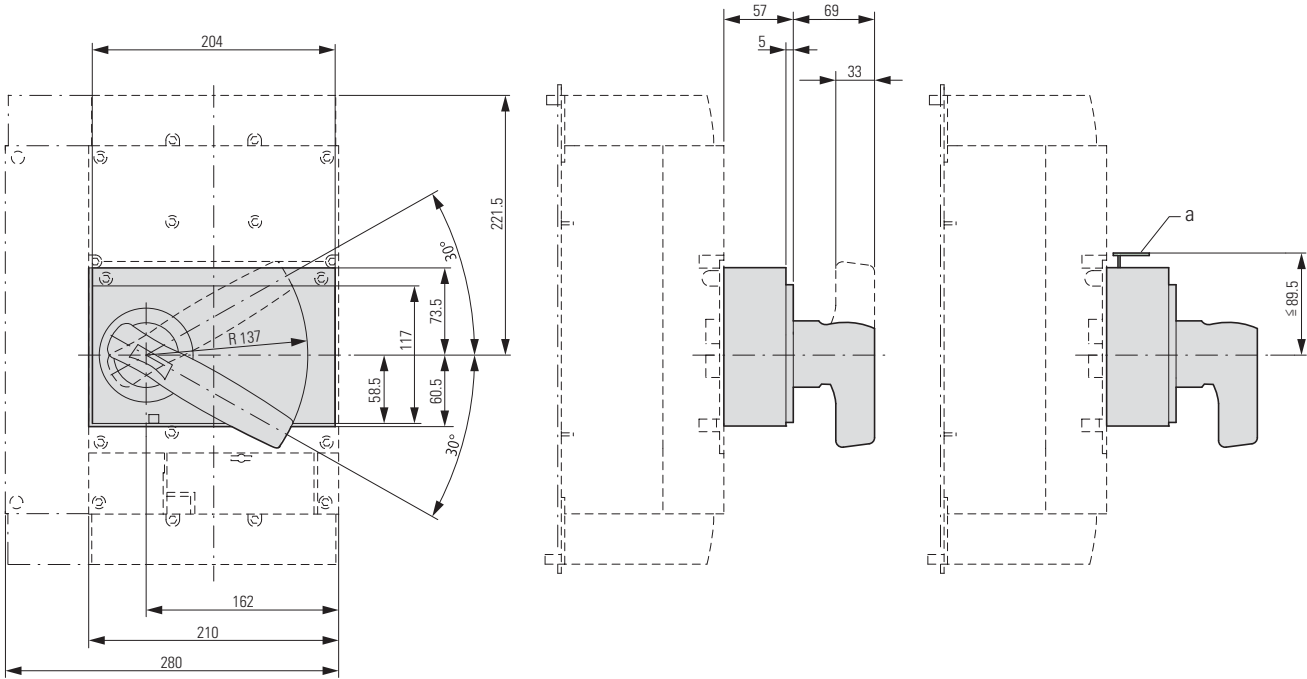

① Up to 3 padlocks

Door coupling rotary handles NZM4-XTVD(V)(R)...

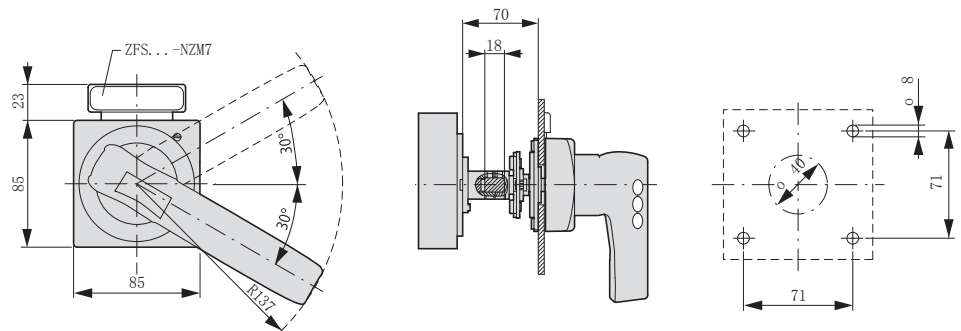


① Up to 3 padlocks


NZM4-XTV..., NZM4...-XV, NZM4-XS...

Door coupling rotary handle with extension shaft


NZM4-XTVD(V)(R)(-NA)
NZM3/4-XV4(6)

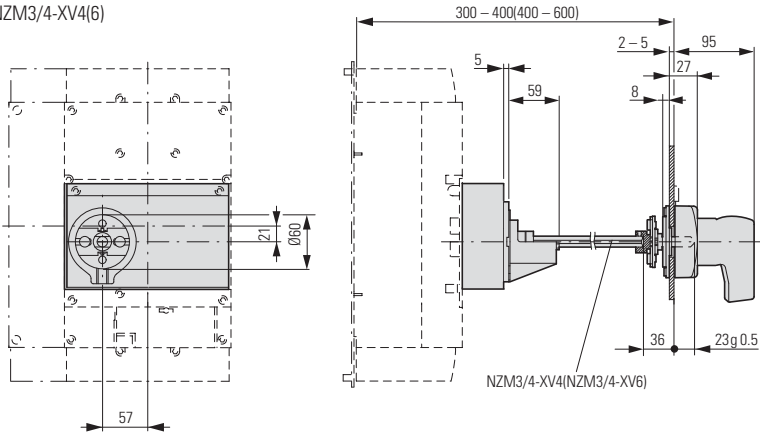


NZM4-XTVDIVIRI-601-NA)

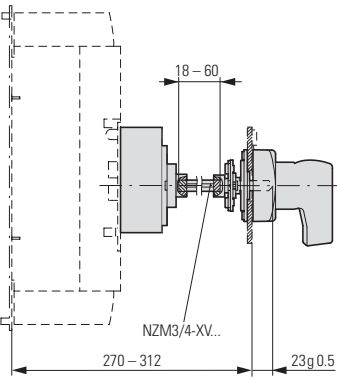

NZM4-XTVDIVIRI-01-NA)

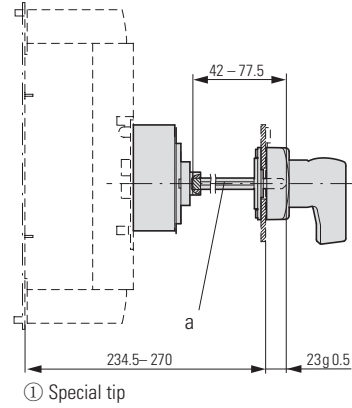


Minimum distance of door coupling rotary handle from door pivot point



Main switch assembly kit for side wall installation

NZM4-XS(R)-L
NZM4-XS(R)-R

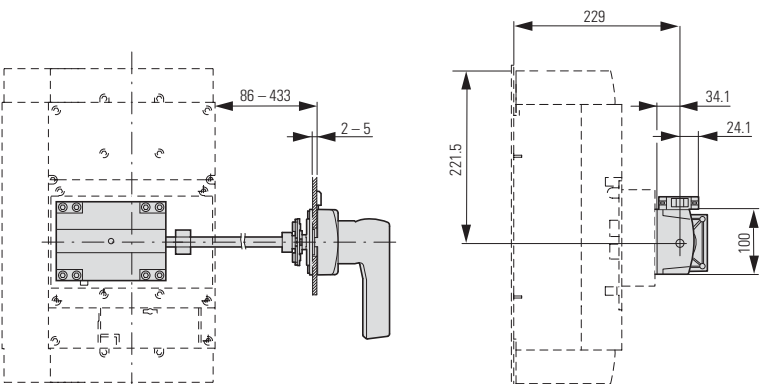


1


NZM4-XBR, NZM4-XMV, NZM4-X...

Insulating surround

NZM4-XBR

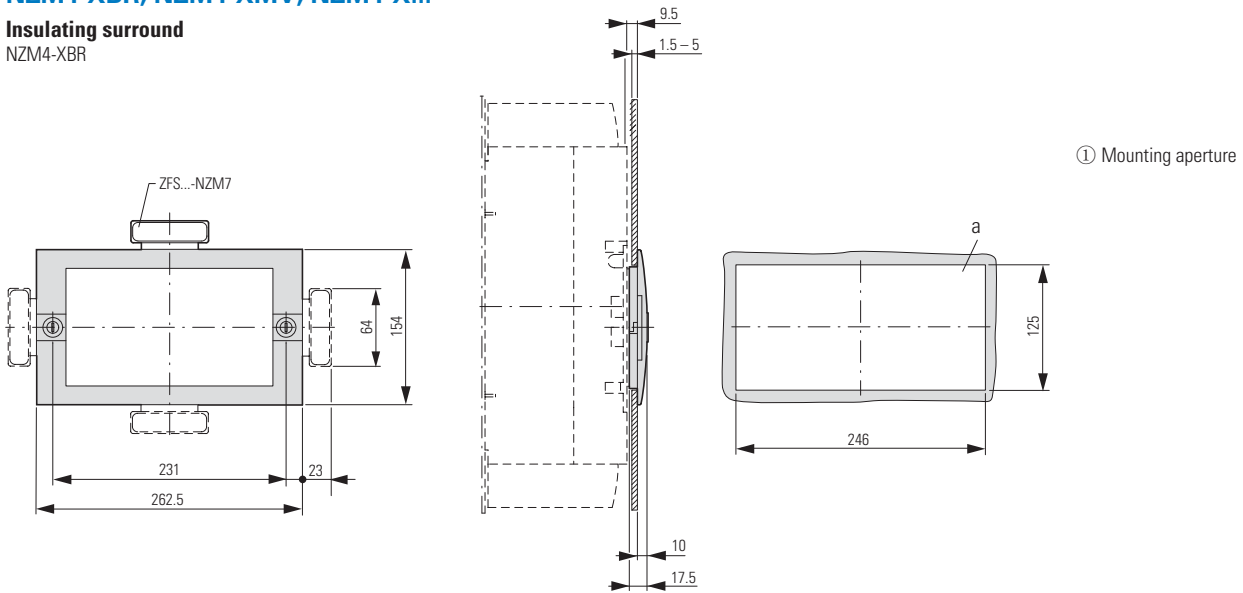


NZM4-XBRS

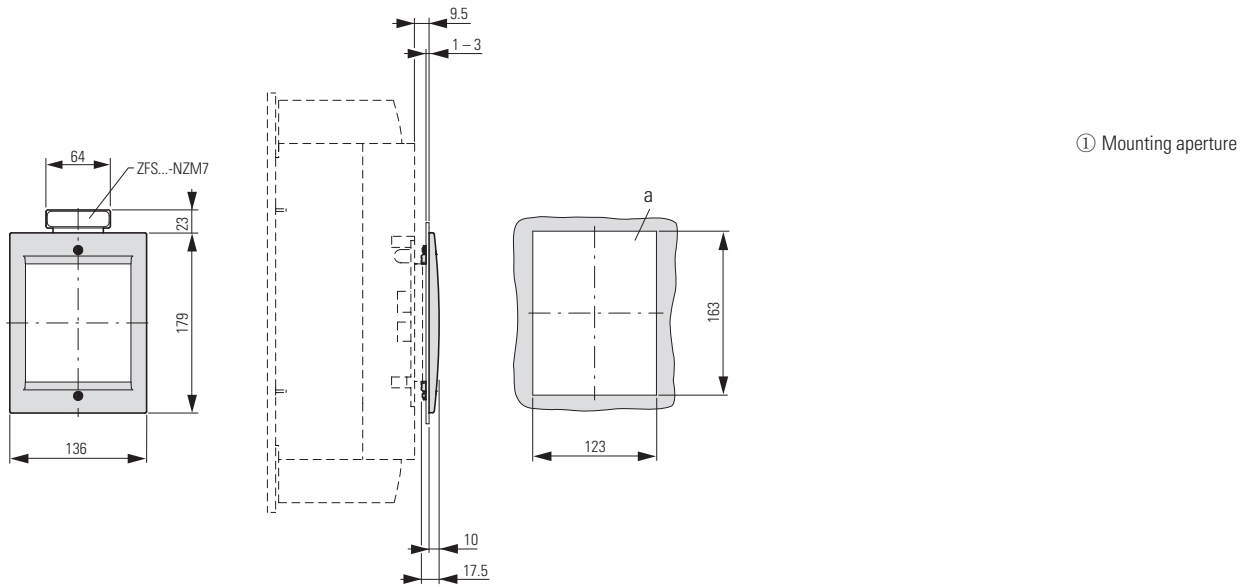

Mechanical interlock


NZM4-XMV + NZM4-XDV(R)

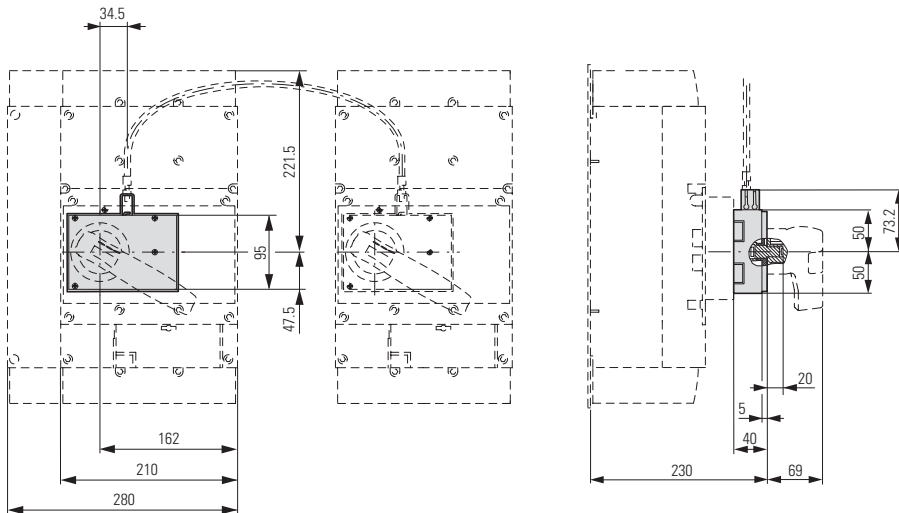


NZM4-XMV + NZM4-XTVD(V)(R)-0

Mechanical interlock


NZM4-XMV+NZM4-XTVDIIRI

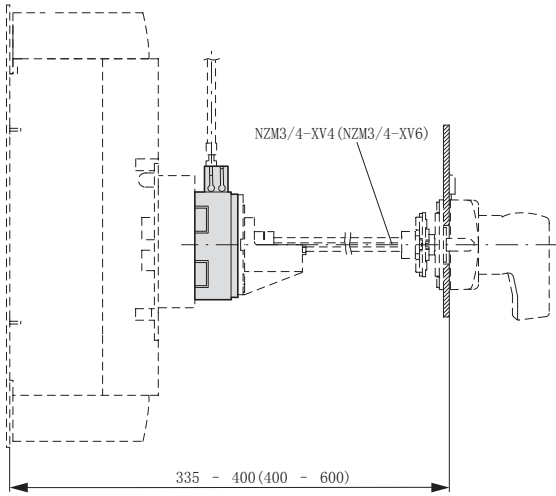

NZM4-XMV+NZM4-XTVDIIRI-60

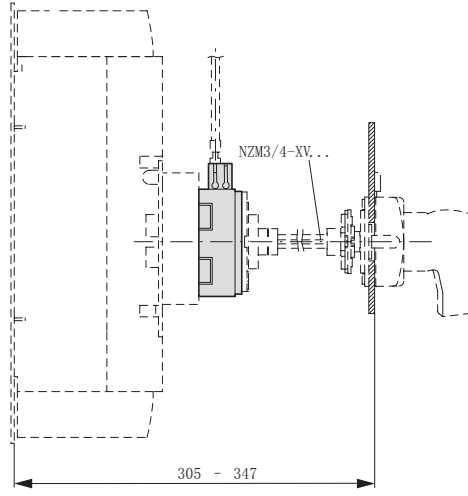

NZM4-XMV+NZM4-XTVDIIRI-0

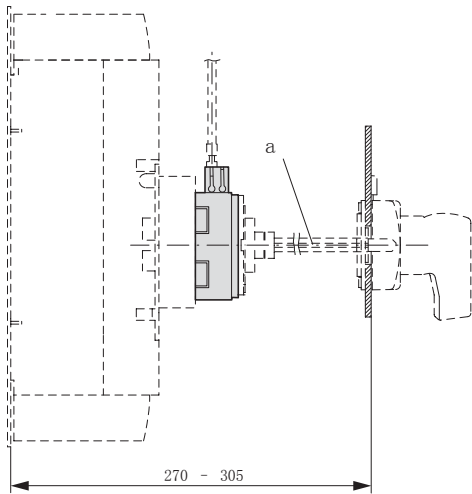

① Special tip

1.9

Circuit-breakers, switch-disconnectors


Auxiliary contacts, trip-indicating auxiliary contacts

1

NZM4...-XAV


Remote operators

NZM4-XR...

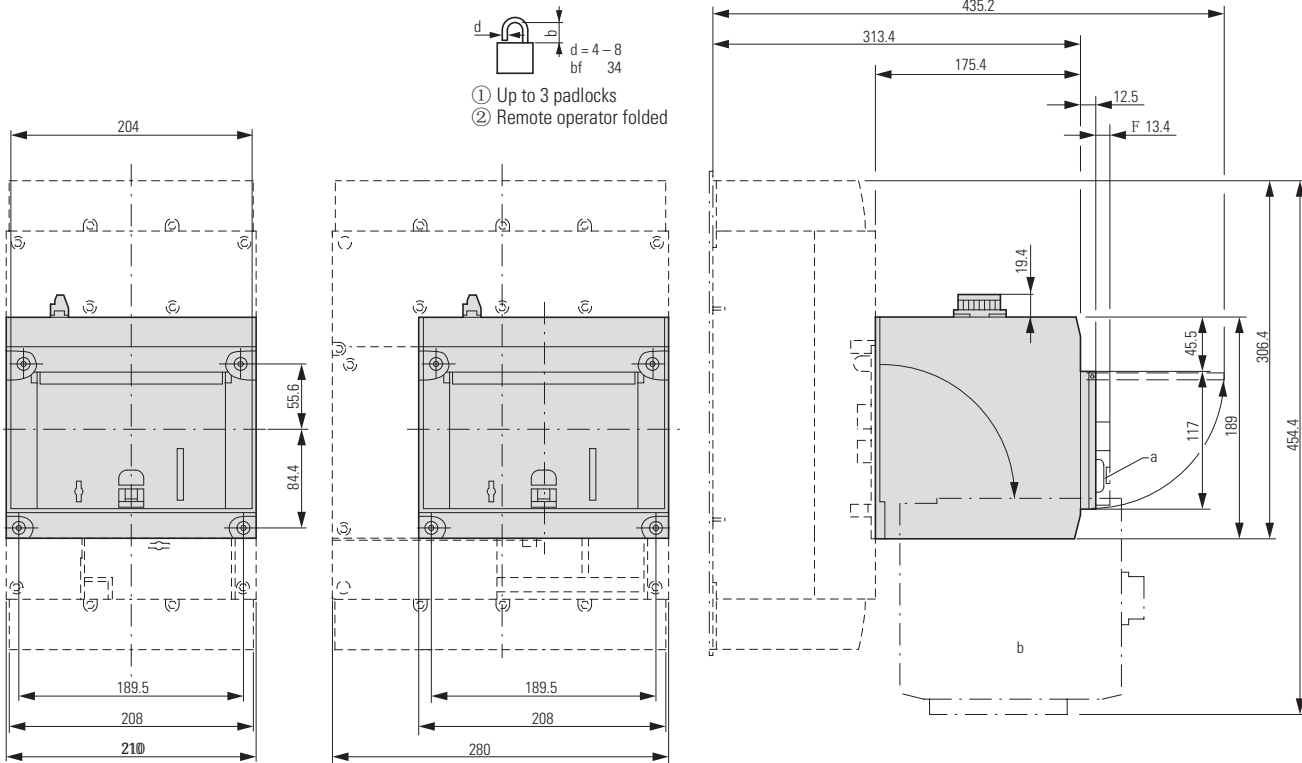

Withdrawable unit


+NZM4-4-XAV

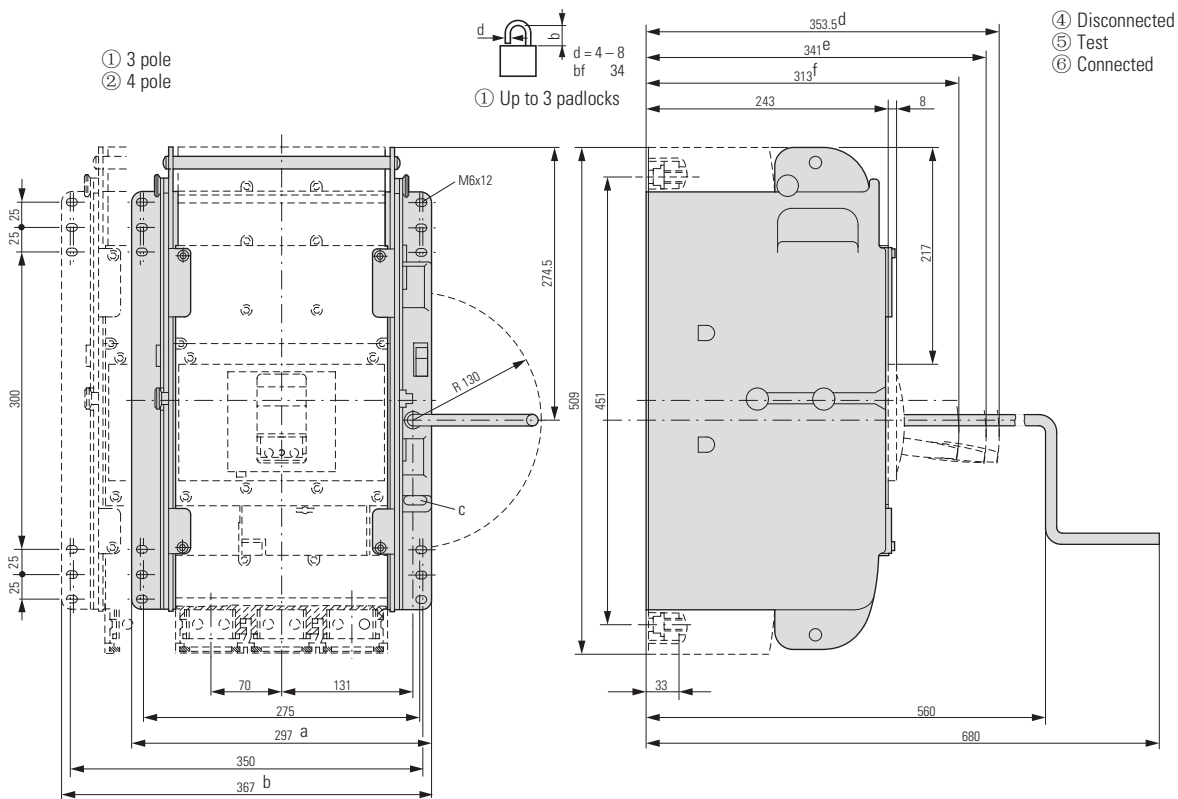


NZM...XMC, NZM-XSWD

Measuring and communication module

NZM2 (3)...XMC-SO(MB)

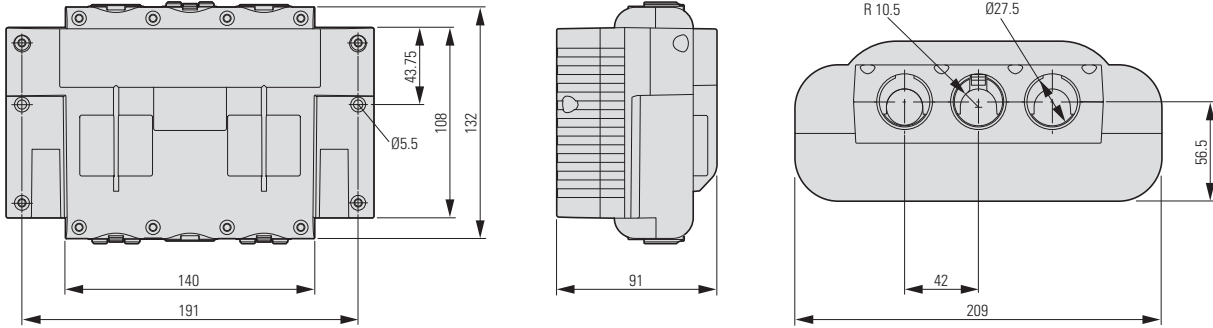


NZM2 (3)-(4)...XMC-SO(MB)

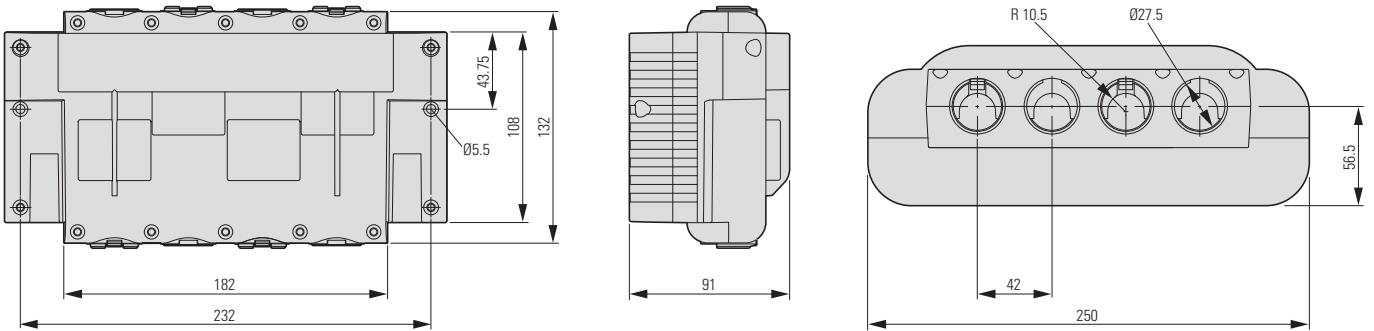

Communication interface for SmartWire-Darwin

NZM-XSWD-704

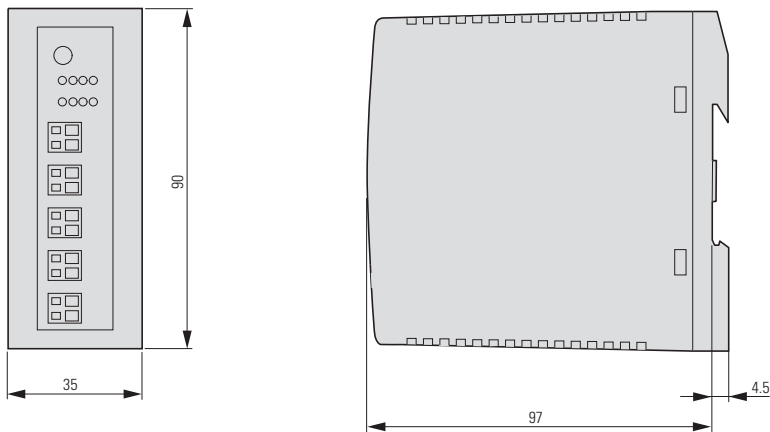

Eaton is dedicated to ensuring that reliable, efficient and safe power is available when it's needed most. With unparalleled knowledge of electrical power management across industries, experts at Eaton deliver customized, integrated solutions to solve our customers' most critical challenges.

Our focus is on delivering the right solution for the application. But, decision makers demand more than just innovative products. They turn to Eaton for an unwavering commitment to personal support that makes customer success a top priority. For more information, visit www.eaton.com.cn/electrical.

Eaton Corporation
Asia Pacific Headquarter
No.3, Lane 280, Linhong Road,
Changning District,
Shanghai 200335
Tel: 86-21-52000099
Fax: 86-21-52000200

© 2011 Eaton Corporation
All Rights Reserved
Printed in China
NZM1-4(12-2011)



Eaton is a registered trademark
of Eaton Corporation.

All trademarks are property of their
respective owners.